

# Rental Solutions Guide

All the gear you need

VERSION 6.0



**HercRentals**<sup>®</sup>


Call 888-777-2700 for rates and reservations  
[HercRentals.com](https://www.HercRentals.com)





## We equip our customers and communities to build a brighter future.

Herc Rentals® is one of the leading equipment rental suppliers with approximately 275 company-operated locations, principally in North America. With more than 50 years of experience, Herc Rentals is a full-line equipment rental supplier in key markets, including commercial and residential construction, industrial and manufacturing, civil infrastructure, automotive, government and municipalities, energy, remediation, emergency response, facilities, entertainment and agriculture, as well as refineries and petrochemicals. The equipment rental business is supported by ProSolutions® (our industry-specific solutions-based services), and our ProContractor professional grade tools, commercial vehicles, and pump, power and climate control product offerings, all of which are aimed at helping customers work more efficiently, effectively and safely. For more information visit [HercRentals.com](https://www.HercRentals.com).

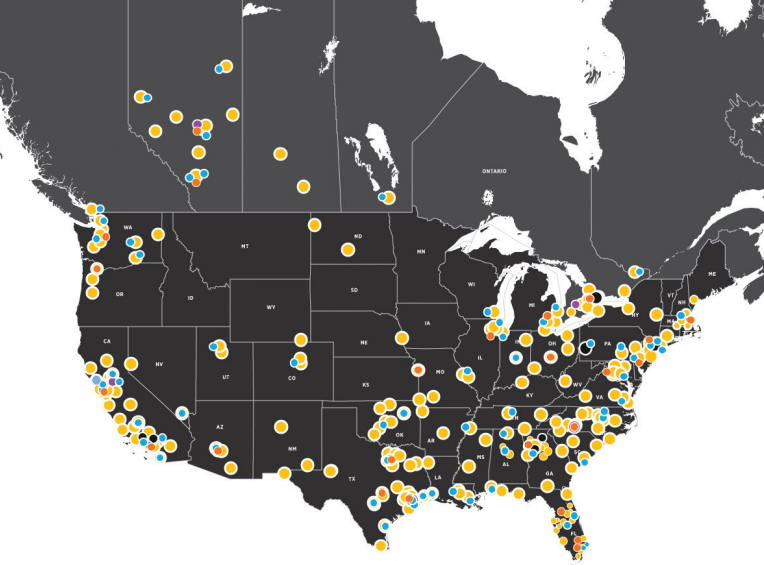





9

### **Aerial**

Single person lifts, scissor lifts, articulating and telescopic booms

17

### **Air Compressors and Air Tools**

Wide variety of air compressors, aftercoolers and air tools

25

### **Climate Control**

A/C units, chillers, heaters, dehumidifiers and air movers

39

### **Compaction**

Plate compactors, rammers, walk-behind rollers, ride-on asphalt rollers and ride-on soil rollers

43

### **Concrete and Flooring**

Saws, drills, mixers, trowels, grinders, scrapers, sweepers, scrubbers, and more

59

### **Earthmoving**

Compact track loaders, excavators, dozers, tractors, wheel loaders and more

69

### **Tools**

Light construction tools, electric tools, and mechanical and industrial grade tools

85

### **Lawn**

Augers, mowers, chain saws, stump grinders, trenchers, wood chippers and more

89

### **Lighting**

Electric LED light towers, engine driven light towers, metal halide light towers, solar and small portable

95

### **Material Handling**

Material and contractor lifts, forklifts, telehandlers, jack and cylinders, cranes and more

109

### **Pump and Power**

Electric pumps, diaphragm pumps, diesel pumps, power generation, fuel tanks, and load banks

123

### **Trucks and Trailers**

Wide variety of trucks and trailers with customization options.

133

### **Job Site and Traffic**

Pedestrian and traffic barriers, message boards, storage containers and more



# SERVICES AND INFORMATION

## Safety First

Safe operation of our rental equipment is a top priority. SAFETY FIRST. SAFETY ALWAYS.

We offer Equipment Safe Operation Training with top-notch instructors for many of the equipment categories we rent.

All courses include hands-on practical training and evaluation. Upon successful course completion, you'll be issued a wallet card and certificate for the following operator certification courses:

- Aerial (Scissor, Boom, Manually Propelled MEWP)
- Forklift Class I, IV, V
- Variable Reach & Straight Mast Forklift Class VII

Training is available at your local branch or we can come to your job site.

## Rental Terms

Herc Rentals provides daily, weekly, monthly and long-term rentals. Acceptable forms of payment are checks and major credit cards, or if you're a frequent customer, we invite you to open a commercial account with us.

Please note: two forms of identification are required from all customers who do not have a commercial account, preferably a valid driver's license and a major credit card.

For your convenience, visit [HercRentals.com/us/credit](https://www.herc.com/us/credit) to download, or complete our online credit application.

## Transportation Services

Herc Rentals has one of the largest equipment delivery fleets in North America. Utilizing our special delivery fleet, we ensure your equipment arrives safely and on time.

## Rental Protection Plan (RPP)

Herc Rentals offers you peace of mind when RPP is accepted at the start of the rental. This limits your out-of-pocket costs when accidental damages or theft occur on the jobsite. Have a Certificate of Insurance (COI)? RPP can bridge the gap in your insurance when the damage isn't costly enough to submit a claim, but is more than your deductible. Herc Rentals' RPP provides you a true worry-free rental experience.

## Refueling and Cleaning Services

All equipment is delivered clean and with a full tank of fuel, and if returned in the same condition, no charges apply. For your convenience upon return, we offer cleaning and refueling services.

## Refueling

Customer must refuel to starting level prior to return; or, refuel upon return. Fees will be based on gallons used. Refueling rates include costs for fuel tanks, maintenance, and labor.

## Cleaning

Equipment must be cleaned prior to return; if not returned clean, fees will be assessed to bring equipment to rental-ready condition. Cleaning rates include costs for labor and materials.

## Preventative Maintenance Services

To maintain the highest level of operating performance of our fleet of generators, pumps, carry deck cranes and similar equipment, Herc Rentals performs preventative maintenance as recommended by the manufacturer. In addition, Herc Rentals complies with all inspection requirements and applies a Preventative Maintenance (PM) charge associated with performing the maintenance and service.

The PM charge is a per hour charge that is applied to every hour the equipment is operating or running while on rent. The PM charge is between \$1 - \$4 depending on the type and size of the equipment and the number of hours which is determined by the meter machine installed on the equipment. PM charges are billed monthly based on 160 hours of use. At time of final invoice, the PM charge for the time on rent will be adjusted up or down to reflect actual hours used. Inspection fees may apply separately or as part of the PM charge. The PM charge is not a tax, or a government mandated charge and Herc Rentals may change it from time to time in its discretion.





# SAFETY TRAINING

At Herc Rentals, we have the equipment safety training where and when you need it. We have a wide range of high quality operator safety training classes. Our classroom and hands-on training sessions help meet your training requirements while preparing each operator to get the job done right.

## MEWP / Forklift Familiarization Upon Delivery

Upon delivery, the driver shall complete the following with the person receiving the mobile elevating work platform/ forklift:

- Identify the weather resistant compartment (for manual storage)
- Confirm that the manuals, as specified by the manufacturer, are on the MEWP/Forklift.
- Review control functions with the operator or person designated by the customer
- Review safety devices specific to the model MEWP/ Forklift being delivered

## General Training

Our General Training format includes:

- Formal instruction (e.g., lecture, discussion, written material and manufacturer's training material)
- Practical training (demonstrations and exercises performed by the trainee)
- Evaluation of the operator's performance in the workplace (in collaboration with the customer)

## In our courses we review

- Equipment-related topics
- Workplace-related topics
- Plant/Site specific rules



## Difference Between General Training + Familiarization

| GENERAL TRAINING          | FAMILIARIZATION           |
|---------------------------|---------------------------|
| Classroom/Formal Training | Hands-On Instruction only |
| Hands-On Evaluation       | Time 10-45 minutes        |

## Familiarization Does Not Satisfy Requirements for Certification

Herc Rentals can deliver Equipment Safe Operation Training to our customers using our Qualified Instructors for the following equipment we rent:

### Powered Industrial Trucks (Forklifts) as required by OSHA 1910.178 and 1926.602:

- Internal Combustion Engine Trucks (solid/cushion tires) (Class IV)
- Internal Combustion Engine Trucks (pneumatic tires) (Class V)
- Rough Terrain Forklift Trucks (straight/vertical mast and variable/extended reach) (telescopic) (Class VII)
- Electric Motor Rider Trucks (Class I)
- Electric Motor Narrow Aisle Trucks (Class II)
- Electric Motor Hand Trucks or Hand/Rider Trucks (Class III)

### Mobile Elevating Work Platforms (formerly Aerial Work Platform) covered by ANSI/SIA Standards:

- Vehicle Mounted Towable Boom Lift
- Manually Propelled Elevating Platform
- Boom Supported Elevating Work Platform
- Self-Propelled Elevating Work Platform

### Other Equipment Safe Operator Training

- Courses Offered
- Skid Steer
- Backhoe
- Excavator
- Atrium Boom Lift

### Train the Trainer Courses

- Mobile Elevating Work Platform (formerly Aerial Work Platform)
- Powered Industrial Trucks (Forklifts)

### Silica Dust Training

- Silica Dust
- Personal protective equipment requirements



# BENEFITS OF RENTING

## Assistance from experienced professionals:

Renting not only helps reduce costs, it also provides access to expert knowledge and training. It allows customers to take advantage of professionals who will:

- We handle all of the essentials and more, including transportation, training, service, and setup.
- Access and secure the right equipment.
- Propose specialized equipment applications, such as aerial, pump & power, trucks, earthmoving and more.

Renting allows the customer to take on a wide variety of jobs and projects without the worry of necessary capital required to purchase.

- Seasonal and large jobs require specialized equipment that can be obtained by renting.
- Renting allows for equipment to be available 24-7.

# ENVIRONMENTAL MANAGEMENT POLICY

Herc Rentals Inc. is committed to minimizing the impact of operations on the environment by implementing programs that incorporate sound environmental policy and sustainability practices. We will operate in accordance with all relevant local, state, and federal regulations and will strive to use pollution prevention and best management practices throughout our branches. Our corporate operations will provide the guidance and resources to our operations as regulation changes or conditions are found that need to be addressed. The support and guidance to the Policy can be found in the Environmental Procedures.

## Herc Rentals is committed to:

- Handle, store, and dispose of substances that are defined as hazardous material in compliance with local, state, and federal regulations.
- Reduce, reuse, and recycle our waste products when applicable.
  - Company goal to reduce intensity of non-hazardous landfilled waste by 25% from 2019 baseline by 2030.
  - Continue to monitor hazardous waste activity to

## New Equipment

Herc Rentals makes significant annual investments in the newest, most advanced equipment on the market.

## Other Benefits

- Environmentally Friendly – “Clean & Green”
- Because rental equipment is newer, renting instead of buying ensures that customers have access to the most fuel-efficient and emission controlled equipment on the market
- All rental stores in California with certain types of equipment are required to be in compliance with CARB regulations
- These regulations can be implemented in other parts of the U.S.

- ensure recycling and incineration are utilized over landfill disposals.
- Minimize water consumption and ensure safe treatment within our branches by incorporating innovative design of wastewater treatment systems.
- Minimize energy consumption by employing energy reducing initiatives.
  - Company goal to reduce Scope 1 and Scope 2 greenhouse gas emissions intensity by 25% from our 2019 baseline by 2030.
  - Update lighting and HVAC with lower energy consuming sources when applicable or expired.
  - Negotiate utility sources for most renewable source available when applicable, which includes solar power generation at Herc facilities when feasible.
- Conduct regular training for employees working with petroleum storage tanks.
- Develop and maintain appropriate emergency and spill response programs.
- Reduce environmental impact by utilizing low impact products where possible.
- Monitor the environmental impact of our business practices and review our progress on a continual basis.
- Promote environmental stewardship and best management practices to our customers, vendors, and employees.
- Continuously improve our Environmental Management System.



# ECOCLEAN

Herc Rentals remains committed to minimizing the impact on the environment by continuing to add ECOCLEAN options to our fleet. Look for the ECOCLEAN options throughout our catalog that are geared to support reductions in greenhouse gas (GHG) emissions compared to standard diesel or gasoline models.

EPA reports nearly 80% of GHG emissions emitted to air come from carbon emissions. Along with electricity, transportation gas emissions account for more than 50% of all total US greenhouse gas emissions and 11% comes from residential and commercial mainly by the use of fossil fuels burned for heat.

When considering the best equipment options for your needs, below is a list of power sources with potential savings in GHG gas emissions depending on engine size:

**Solar** - Optimal with 100% savings on greenhouse gas emissions during operation compared to other power sources.

**EV or battery** - Depending on charging source, can save 50-75% of carbon emissions compared to fuel combustion. Zero emissions during operation (i.e., tailpipe emissions).

**Propane** - Considered harmless to soil or groundwater, freshwater or saltwater. Emits 10-50% less GHG emissions and considered cleaner than biodiesel, 30-80% less carbon monoxide and 20% less nitrogen oxide than gasoline, and nearly 100% less particulate matter than diesel. Not considered an air pollutant and safer to transport than other fuels.

**Biofuel** - Can achieve 40-86% emissions savings compared with petroleum diesel depending on blend and source. 11% less carbon monoxide and 10% less particulate matter than diesel.

**Hybrid** - Dual power sources – battery & diesel, can reduce emissions by going longer hours/distance on the

same amount of fuel, where emissions are reduced by 30-40% of conventional fuel models.


**Diesel** - Saves about 13% on CO2 emissions compared to gasoline powered engines per volume of fuel.

- Tier 4\* engines reduce particulate matter (PM) and oxides of nitrogen (NOx) to near-zero levels).
- Non-Tier 4\* engines emit more NOx and PM than hybrid engines.

**Gasoline** - Although per gallon carbon emissions are less than diesel, takes more gasoline to do same work as a diesel engine.

\*Tier 4 refers to the emission milestone established in 2014 by the U.S. Environmental Protection Agency and the California Air Resources Board applicable to new engines found in off-road equipment, including construction, mining and agricultural equipment, marine vessels and workboats, locomotives and stationary engines found in industrial and power generation applications.



**ELECTRIC LED LINK-TOWERS** 

**Features include:**

- Stabilizing outriggers enable towers to withstand windy conditions
- Ideal for construction, outdoor events, sports venues, increased parking lot security, and more

**UP TO 154,000 LUMENS** | **UNLIMITED RUN TIME**

| MAKE           | MODEL                          | TOWER TYPE  | MAT HEIGHT | POWER        | LIGHTS   | RUN TIME  | FUEL BURN | WIND SPEED | CE CLASS |
|----------------|--------------------------------|-------------|------------|--------------|----------|-----------|-----------|------------|----------|
| Generic Mobile | Link-Tower RE33AC              | Manual push | 16 ft      | 120V/15A-20A | (4) 250W | Unlimited | 0 gph     | 40 mph     | 50-1082  |
| Altman         | Link-Tower Night-Lite E-Series | Manual push | 23 ft      | 120V/15A     | (4) 250W | Unlimited | 0 gph     | 50 mph     | 50-1082  |
| Altman         | Link-Tower Mobile              | Towable     | 23 ft      | 120V/15A-20A | (4) 250W | Unlimited | 0 gph     | 50 mph     | 50-1084  |



# The future of the equipment rental industry is here.

## ProControl<sup>TM</sup> NextGen



### Fleet Management

Reduce downtime and eliminate redundancy with real-time actionable data from ProControl NextGen.

- Utilization
- Diagnostics
- Alerts



### Account Management

Easy-to-use, intuitive, and customizable account management features include:

- Complete account view
- Corporate or subsidiary views
- Purchase order management
- Accurate billing
- Automatic billing notifications



### Analytics and Reporting

Make informed decisions for your business with our robust reporting suite. Select from a library of pre-built reports or build your own.

- Customizable dashboard
- Schedule reports
- Send reports to account contacts



Learn more at [HercRentals.com](https://www.HercRentals.com)

**HercRentals<sup>®</sup>**





# AERIAL



Single Person Lifts  
Electric Scissor Lifts  
Compact Electric Scissor Lifts  
Rough Terrain Scissor Lifts  
Articulating Boom Lifts  
Vertical Mast Lifts

Towable Boom Lifts  
Atrium Lifts  
Hybrid Boom Lifts  
Telescopic Boom Lifts

## VERTICAL MAST LIFTS



Single person lifts are a safer and more efficient alternative to ladders.

**8-35 FT**  
WORKING HEIGHT

**7-32 FT**  
PLATFORM HEIGHT



**Features and applications include:**

- Allows you to work 360 degrees with both hands from a secure, stable platform
- FT40 and FT140 can be assembled and disassembled in minutes
- Lightweight for sensitive floor applications
- A great addition for construction sites, maintenance, industrial, retail and warehousing operations



| MAKE  | MODEL      | PLATFORM HEIGHT | WORKING HEIGHT | POWER   | PLATFORM CAPACITY | FLOOR LOAD GROUND PRESSURE                 | DIMENSIONS (LWH)                     | WEIGHT    | CAT-CLASS |
|-------|------------|-----------------|----------------|---------|-------------------|--|--------------------------------------|-----------|-----------|
| JLG   | Ecolift 70 | 7 ft 3 in       | 13 ft 3 in     | Manual  | 330 lb            | Rear tires 74.2 psi, front tires 79.22 psi | 50 in / 28 in / 76 in                | 672 lb    | 400-1050  |
| JLG   | FT70       | 7 ft            | 13 ft          | Battery | 330 lb            | Rear pads 53.17 psi, front pads 32.37 psi  | 44 in / 30 in / 65 in                | 108 lb    | 400-1070  |
| JLG   | FT140      | 13 ft 6 in      | 19 ft 6 in     | Battery | 330 lb            | 64.83 psi                                  | 58 in / 64 in / 79 in                | 326 lb    | 400-1100  |
| Genie | AWP-30S DC | 29 ft 6 in      | 35 ft 6 in     | Battery | 350 lb            | Rear pads 22 psi, front pads 20.6 psi      | 53 in / 29 in / 78 in                | 867 lb    | 400-1220  |
| Genie | GR-12      | 11 ft 5 in      | 17 ft 5 in     | Battery | 500 lb            | 52.31 psi                                  | 53 in / 29 in / 62 in                | 1,581 lb  | 400-1270  |
| Genie | GR-20      | 19 ft 11 in     | 25 ft 11 in    | Battery | 350 lb            | 66.92 psi                                  | 53 in / 32 in / 78 in                | 2,451 lb  | 400-1290  |
| JLG   | T26E       | 26 ft 5 in      | 8 ft 8 in      | Battery | 500 lb            | 265 psi                                    | 9 ft 3 in / 3 ft 9 in / 6 ft 7 in    | 6,900 lb  | 400-1310  |
| JLG   | T32E       | 32 ft 3 in      | 14 ft 11 in    | Battery | 500 lb            | 178 psi                                    | 11 ft 10 in / 3 ft 11 in / 6 ft 7 in | 10,140 lb | 400-1320  |

## ELECTRIC SCISSOR LIFTS



Electric scissor lifts, capable of supporting two people, are ideal for indoor/outdoor construction and maintenance projects.

**26-45 FT**  
WORKING HEIGHT

**19-39 FT**  
PLATFORM HEIGHT



**Features and applications include:**

- Quiet and clean operation for a variety of environments
- Fits through most standard doorways, tight aisles and elevators
- Hydraulic fluid containment system available on 2021 JLG and Skyjack models
- Long battery life
- Non-marking tires
- Can be driven at full height



| MAKE    | MODEL      | PLATFORM HEIGHT | WORKING HEIGHT | POWER   | PLATFORM CAPACITY | WHEEL LOAD | DIMENSIONS (LWH)       | WEIGHT   | CAT-CLASS |
|---------|------------|-----------------|----------------|---------|-------------------|------------|------------------------|----------|-----------|
| Skyjack | SJIII 3219 | 19 ft           | 26 ft          | Battery | 550 lb            | 110 psi    | 70 in / 32 in / 79 in  | 2,580 lb | 405-1090  |
| JLG     | 2632ES     | 25 ft 6 in      | 31 ft 6 in     | Battery | 500/800 lb        | 90 psi     | 91 in / 32 in / 92 in  | 4,635 lb | 405-1140  |
| Genie   | GS-3232    | 32 ft           | 38 ft          | Battery | 500 lb            | 113 psi    | 96 in / 32 in / 94 in  | 5,185 lb | 405-1200  |
| JLG     | 3246ES     | 31 ft 9 in      | 37 ft 9 in     | Battery | 700/1,000 lb      | 87 psi     | 99 in / 46 in / 93 in  | 4,975 lb | 405-1210  |
| Genie   | GS-4047    | 39 ft           | 45 ft          | Battery | 550 lb            | 175 psi    | 96 in / 47 in / 100 in | 7,185 lb | 405-1260  |



## COMPACT ELECTRIC SCISSOR LIFTS



Compact electric scissor lifts are built for light maintenance work and support up to two people.

**19-24 FT**  
WORKING HEIGHT

**13-19 FT**  
PLATFORM HEIGHT



### Features and applications include:

- Long battery life
- Quiet and clean operation for a variety of environments
- Non-marking tires
- Fits through doorways and elevators
- Excellent for construction sites, maintenance, industrial, retail and warehousing operations

### XTRA-DECK®

Pull-down Xtra-Deck gives additional 20 inch height for 1-person access through ceiling panels with guardrails on 4 sides.



| MAKE | MODEL                            | PLATFORM HEIGHT | WORKING HEIGHT | POWER   | PLATFORM CAPACITY | MACHINE LOAD | WHEEL LOAD | DIMENSIONS (LWH)      | WEIGHT   | CAT-CLASS |
|------|----------------------------------|-----------------|----------------|---------|-------------------|--------------|------------|-----------------------|----------|-----------|
| MEC  | 1330 SE                          | 13 ft           | 19 ft          | Battery | 530 lb            | 201 psf      | 112 psi    | 58 in / 30 in / 74 in | 1,900 lb | 405-1060  |
| MEC  | 1330 SE with Leak Control System | 13 ft           | 19 ft          | Battery | 530 lb            | 201 psf      | 112 psi    | 58 in / 30 in / 74 in | 1,900 lb | 405-1060  |
| MEC  | Micro 13 Xtra-Deck™              | 13 ft           | 19 ft          | Battery | 530 lb            | 221 psf      | 120 psi    | 58 in / 30 in / 74 in | 2,050 lb | 405-1065  |
| MEC  | Micro 19                         | 18 ft 4 in      | 24 ft          | Battery | 500 lb            | 224 psf      | 112 psi    | 60 in / 32 in / 79 in | 2,690 lb | 405-1085  |
| MEC  | Micro 19 Xtra Deck™              | 18 ft 4 in      | 24 ft          | Battery | 500 lb            | 233 psf      | 117 psi    | 60 in / 32 in / 79 in | 2,820 lb | 405-1087  |

## ROUGH TERRAIN SCISSOR LIFTS

Electric scissor lifts are designed for outdoor aerial projects with limited access and less-than-ideal ground conditions.

**32-53 FT**  
WORKING HEIGHT

**26-53 FT**  
PLATFORM HEIGHT



### Features and applications include:

- Quick set up
- Outriggers proved stability
- Foam filled tires only on Herc Rentals fleet
- Large decks allow additional space for more people and materials
- Ideal for outdoor construction sites, industrial use and more

\* Guardrails in fixed position



| MAKE    | MODEL      | PLATFORM HEIGHT | WORKING HEIGHT | POWER     | PLATFORM CAPACITY | DIMENSIONS (LWH)                   | WEIGHT    | CAT-CLASS |
|---------|------------|-----------------|----------------|-----------|-------------------|------------------------------------|-----------|-----------|
| Genie   | GS 2669 RT | 26 ft 2 in      | 32 ft          | Dual fuel | 1,500 lb          | 10 ft 3 in / 5 ft 9 in / 8 ft 6 in | 7,295 lb  | 405-1430  |
| Genie   | GS 2669 RT | 26 ft 2 in      | 32 ft          | Diesel    | 1,500 lb          | 10 ft 3 in / 5 ft 9 in / 8 ft 6 in | 7,295 lb  | 405-1450  |
| SkyJack | SJ 8841 RT | 41 ft           | 47 ft          | Dual fuel | 1,500 lb          | 11 ft 5 in / 7.25 ft / 9 ft 6 in   | 10,880 lb | 405-1780  |
| SkyJack | SJ 8841 RT | 41 ft           | 47 ft          | Diesel    | 1,500 lb          | 11 ft 5 in / 7.25 ft / 9 ft 6 in   | 10,880 lb | 405-1800  |
| JLG     | 530 LRT    | 53 ft           | 53 ft          | Dual fuel | 1,500 lb          | 17 ft / 7 ft 7 in / 10 ft 1 in     | 17,000 lb | 405-1850  |
| JLG     | 530 LRT    | 53 ft           | 53 ft          | Diesel    | 1,500 lb          | 17 ft / 7 ft 7 in / 10 ft 1 in     | 17,000 lb | 405-1860  |

## TOWABLE BOOM LIFTS



Towable boom lifts can be attached to any vehicle with a standard hitch and hauled to job sites at an industry-leading speed of 65 mph.

**34-50 FT**  
PLATFORM HEIGHT

**20-30 FT**  
OUTREACH



**Features and applications include:**

- Gasoline engine or 24V DC electric power
- Accessory mounting tray accommodates your generator, air compressor or pressure washer
- Great for tree trimming, indoor or outdoor decorating, construction, painting and maintenance



| MAKE | MODEL | PLATFORM HEIGHT | OUTREACH   | POWER  | PLATFORM CAPACITY | DIMENSIONS (LWH)                    | WEIGHT   | CAT-CLASS |
|------|-------|-----------------|------------|--------|-------------------|-------------------------------------|----------|-----------|
| JLG  | T350  | 34 ft 5 in      | 20 ft 2 in | 24V DC | 500 lb            | 21 ft 9 in / 4 ft 11 in / 6 ft 6 in | 3,400 lb | 410-1010  |
| JLG  | T500J | 50 ft           | 30 ft      | 24V DC | 500 lb            | 27 ft 4 in / 5 ft 8 in / 7 ft 5 in  | 4,800 lb | 410-1030  |

**ATRIUM LIFTS**



Atrium lifts or compact crawlers allow you to access job sites in tough to reach places whether you have to squeeze through narrow doorways, gates, down stairs or aisles.

**50-89 FT**  
PLATFORM HEIGHT

**21-46 FT**  
OUTREACH

**Features and applications include:**

- Auto safety and stability system
- Multi-position outrigger system
- Fits through standard doorways
- Can be used indoors or outdoors
- Tracked wheels allow for climbing of sloped areas



| MAKE         | MODEL  | PLATFORM HEIGHT | MACHINE WIDTH | OUTREACH   | BASKET CAPACITY | DIMENSIONS (LWH)                   | WEIGHT   | CAT-CLASS |
|--------------|--------|-----------------|---------------|------------|-----------------|------------------------------------|----------|-----------|
| JLG          | X430AJ | 50 ft           | 2 ft 5 in     | 21 ft 7 in | 500 lb          | 16 ft 5 in / 2 ft 5 in / 6 ft 6 in | 4,392 lb | 464-1016  |
| JLG          | X600AJ | 59 ft 3 in      | 2 ft 7 in     | 30 ft      | 500 lb          | 16 ft 5 in / 2 ft 7 in / 6 ft 6 in | 6,571 lb | 464-1022  |
| JLG          | X770AJ | 77 ft 5 in      | 3 ft 3 in     | 43 ft      | 500 lb          | 20 ft 9 in / 3 ft 3 in / 6 ft 6 in | 9,665 lb | 464-1036  |
| Reach Master | FS95   | 89 ft           | 2 ft 7 in     | 46 ft      | 440 lb          | 20 ft 8 in / 2 ft 7 in / 6 ft 6 in | 8,250 lb | 464-1042  |



## HYBRID BOOM LIFTS



Hybrid booms are designed for indoor or outdoor applications that demand low noise and clean performance, articulated hybrid boom lifts can get to challenging areas that scissor lifts can't.

**33-60 FT**  
PLATFORM HEIGHT

**19-45 FT**  
OUTREACH



### Features and applications include:

- Battery-powered drive with on-board diesel generator or shore power plug for charging purposes
- All Electric operation ideal for work sites requiring no emissions
- 4WD and full-time active oscillating axles provide traction for gradeability up to 45%
- Great for construction sites, sports arenas, malls, challenging pedestrian areas, and more

| MAKE  | MODEL      | PLATFORM HEIGHT | WORKING HEIGHT | PLATFORM CAPACITY | OUTREACH    | POWER                       | DIMENSIONS (LWH)                    | WEIGHT    | CAT-CLASS |
|-------|------------|-----------------|----------------|-------------------|-------------|-----------------------------|-------------------------------------|-----------|-----------|
| JLG   | H340AJ     | 33 ft 9 in      | 39 ft 9 in     | 500 lb            | 19 ft 11 in | Battery w/ diesel generator | 18 ft 2 in / 6 ft 4 in / 6 ft 7 in  | 9,860 lb  | 410-2060  |
| Genie | Z-45 FE    | 45 ft 8 in      | 51 ft 8 in     | 660 lb            | 22 ft 9 in  | Battery w/ diesel generator | 20 ft 1 in / 7 ft 6 in / 7 ft 6 in  | 14,460 lb | 410-3127  |
| JLG   | M600JP     | 60 ft 4 in      | 66 ft          | 500 lb            | 44 ft 5 in  | Battery w/ diesel generator | 33 ft 4 in / 7 ft 11 in / 8 ft 4 in | 16,050 lb | 410-2530  |
| Genie | Z-60/37 FE | 59 ft 7 in      | 65 ft 7 in     | 500 lb            | 36 ft 7 in  | Battery w/ diesel generator | 26 ft 9 in / 8 ft 2 in / 8 ft 4 in  | 17,100 lb | 410-3205  |



**REQUEST**

**TRAINING**

**Equipment Safety Operator Training**

## ARTICULATING BOOM LIFTS



\*Eco Clean options available

Articulating booms are built for getting around obstacles and can travel both vertically and horizontally.

**30-135 FT**  
PLATFORM HEIGHT

**21-70 FT**  
OUTREACH



### Features and applications include:

- Smooth operation of multiple functions simultaneously
- Powered by battery or fuel-efficient engines
- Reach full height and lower in less than 2 minutes
- Zero tail swing in stowed and raised working positions
- Ideal for construction, utility work, warehousing, arborists and more




| MAKE  | MODEL        | PLATFORM HEIGHT | OUTREACH    | UP/OVER CLEARANCE | POWER           | MACHINE WIDTH | PLATFORM CAPACITY | WEIGHT    | CAT-CLASS |
|-------|--------------|-----------------|-------------|-------------------|-----------------|---------------|-------------------|-----------|-----------|
| Genie | Z-30/20N RJ  | 30 ft           | 21 ft 5 in  | 12 ft             | 48V DC / 24V DC | 3 ft 11 in    | 500 lb            | 14,170 lb | 410-2020  |
| Genie | Z-33/18      | 32 ft 10 in     | 18 ft 3 in  | 14 ft 1 in        | 48V DC          | 4 ft 11 in    | 440 lb            | 8,080 lb  | 410-2030  |
| Genie | Z-34/22N     | 34 ft 6 in      | 22 ft 3 in  | 15 ft 5 in        | 48V DC          | 4 ft 10 in    | 500 lb            | 11,400 lb | 410-2045  |
| Genie | Z-40 /23N RJ | 40 ft 5 in      | 22 ft 8 in  | 21 ft             | 48V DC          | 4 ft 11 in    | 500 lb            | 15,230 lb | 410-2080  |
| Genie | Z-45/25 DC   | 45 ft 6 in      | 25 ft       | 22 ft             | 48V DC          | 5 ft 10 in    | 500 lb            | 15,850 lb | 410-2130  |
| JLG   | 340AJ        | 33 ft 10 in     | 19 ft 11 in | 17 ft             | Dual fuel       | 6 ft 4 in     | 500 lb            | 9,700 lb  | 410-3030  |
| JLG   | 340AJ        | 33 ft 10 in     | 19 ft 11 in | 17 ft             | Diesel          | 6 ft 4 in     | 500 lb            | 9,700 lb  | 410-3040  |
| Genie | Z-45/25 RJ   | 45 ft 6 in      | 22 ft 8 in  | 21 ft 3 in        | Diesel          | 5 ft 10 in    | 500 lb            | 16,300 lb | 410-3120  |
| JLG   | 450AJ        | 45 ft           | 25 ft       | 25 ft             | Diesel          | 7 ft 9 in     | 500 lb            | 12,650 lb | 410-3120  |
| Genie | Z-45XC       | 45 ft 6 in      | 24 ft 9 in  | 24 ft 5 in        | Diesel          | 7 ft 6 in     | 660/1,000 lb      | 16,360 lb | 410-3120  |
| MEC   | 60-J         | 60 ft           | 42 ft 8 in  | 20 ft             | Diesel          | 8 ft          | 500 lb            | 17,900 lb | 410-3200  |
| JLG   | 600AJ        | 60 ft 7 in      | 39 ft 9 in  | 26 ft             | Diesel          | 8 ft 2 in     | 500 lb            | 22,740 lb | 410-3200  |
| JLG   | 800AJ        | 80 ft           | 51 ft 10 in | 32 ft             | Diesel          | 8 ft          | 500 lb            | 34,300 lb | 410-3300  |
| JLG   | 1250 AJP     | 125 ft          | 63 ft 2 in  | 60 ft 6 in        | Diesel          | 8 ft 2 in     | 500/1,000 lb      | 44,000 lb | 410-3350  |
| Genie | ZX-135/70    | 135 ft          | 69 ft 9 in  | 75 ft 6 in        | Diesel          | 8 ft 2 in     | 600 lb            | 46,500 lb | 410-3360  |

**HercRentals®**

**Customer-focused  
ecommerce experience.**

Browse and rent equipment anytime,  
from anywhere.

Experience now at [HercRentals.com](https://www.HercRentals.com)

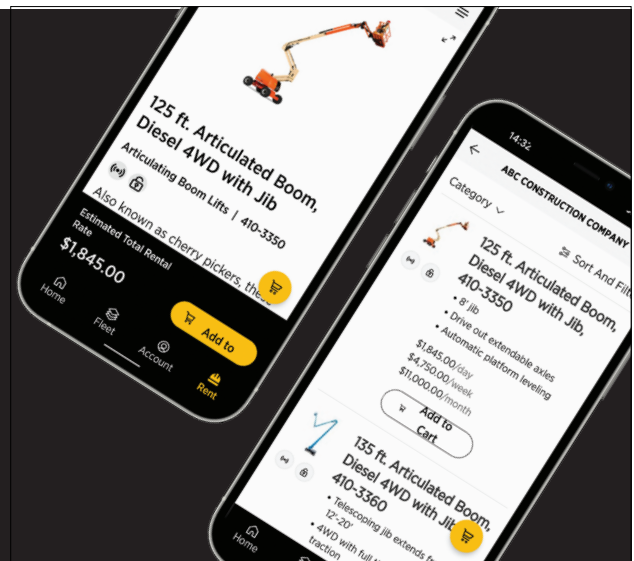



## TELESCOPIC BOOM LIFTS

Telescopic boom lifts allowing you to reach the highest of heights without the use of a crane – safely and quickly.

**39-185 FT**  
PLATFORM HEIGHT

**31-90 FT**  
OUTREACH



### Features and applications include:

- 4WD and 4-wheel steering
- Up to 180-degree platform rotation
- Platform can hold three people and materials
- Large work envelope with up to 10-foot jib
- Ideal for oil and gas industries, commercial and industrial construction, maintenance, entertainment staging and more



| MAKE  | MODEL    | PLATFORM HEIGHT | WORKING HEIGHT | PLATFORM CAPACITY | MAX OUTREACH | POWER  | DIMENSIONS (LWH)                          | WEIGHT    | CAT-CLASS |
|-------|----------|-----------------|----------------|-------------------|--------------|--------|---|-----------|-----------|
| JLG   | 400S     | 40 ft           | 46 ft          | 600/1,000 lb      | 33 ft 3 in   | Diesel | 24 ft 1 in / 7 ft 6.8 in / 8 ft 1 in      | 13,640 lb | 410-4040  |
| Genie | S-40XC   | 39 ft 6 in      | 45 ft 6 in     | 600/1,000 lb      | 31 ft 1 in   | Diesel | 25 ft 6 in / 8 ft 2 in / 8 ft 3 in        | 14,124 lb | 410-4040  |
| JLG   | 460SJ    | 46 ft           | 52 ft          | 600 lb            | 39 ft        | Diesel | 29 ft 3 in / 7 ft 6.8 in / 8 ft 1 in      | 16,600 lb | 410-4090  |
| Genie | S-45XC   | 45 ft           | 44 ft 6 in     | 600/1,000 lb      | 36 ft 2 in   | Diesel | 26 ft 3 in / 8 ft 2 in / 8 ft 3 in        | 16,300 lb | 410-4090  |
| Genie | S-60XC   | 60 ft           | 66 ft          | 600/1,000 lb      | 48 ft 7 in   | Diesel | 28 ft 7 in / 8 ft 2 in / 9 ft 3 in        | 22,930 lb | 410-4140  |
| JLG   | 600S     | 60 ft 3 in      | 66 ft          | 600/1,000 lb      | 49 ft 6 in   | Diesel | 28 ft 7 in / 8 ft 2 in / 8 ft 2.4 in      | 21,461 lb | 410-4140  |
| JLG   | 660SJ    | 66 ft 8 in      | 72 ft 8 in     | 500/750 lb        | 56 ft 9 in   | Diesel | 35 ft 4.7 in / 8 ft 2 in / 8 ft 2 in      | 26,650 lb | 410-4190  |
| Genie | S-65XC   | 65 ft           | 71 ft          | 600/1,000 lb      | 54 ft 2 in   | Diesel | 31 ft 10 in / 8 ft 2 in / 9 ft 3 in       | 25,160 lb | 410-4190  |
| Genie | S-80XC   | 80 ft           | 86 ft          | 600/1,000 lb      | 68 ft 6 in   | Diesel | 37 ft 7 in / 8 ft 2 in / 9 ft 2 in        | 37,000 lb | 410-4242  |
| JLG   | 860SJ    | 86 ft           | 86 ft          | 500/750 lb        | 75 ft        | Diesel | 40 ft / 8 ft 2 in / 10 ft                 | 36,400 lb | 410-4300  |
| Genie | S-85XC   | 85 ft           | 91 ft          | 600/1,000 lb      | 74 ft 6 in   | Diesel | 40 ft 7 in / 8 ft 2 in / 9 ft 2 in        | 39,500 lb | 410-4305  |
| Genie | Z-135/70 | 135 ft          | 141 ft         | 600/1,000 lb      | 75 ft        | Diesel | 42 ft 5 in / 8 ft 2 in / 10 ft 2 in       | 46,500 lb | 410-3360  |
| JLG   | 1350SJP  | 135 ft          | 141 ft         | 500/1,000 lb      | 80 ft        | Diesel | 38 ft 11 in / 8 ft 2 in / 10 ft           | 45,000 lb | 410-3360  |
| JLG   | 1200SJP  | 120 ft          | 126 ft         | 500/1,000 lb      | 75 ft        | Diesel | 34 ft 11 in / 8 ft 2 in / 10 ft           | 40,900 lb | 410-4400  |
| Genie | SX-125XC | 125 ft          | 131 ft         | 660/1,000 lb      | 80 ft        | Diesel | 46 ft 9 in / 8 ft 2 in / 10 ft            | 45,636 lb | 410-4410  |
| Genie | SX-135XC | 135 ft          | 141 ft         | 660/1,000 lb      | 90 ft        | Diesel | 43 ft 7 in / 8 ft 2 in / 10 ft            | 47,500 lb | 410-4422  |
| JLG   | 1500SJ   | 150 ft          | 156 ft         | 500/1,000 lb      | 80 ft        | Diesel | 43 ft / 8 ft 2 in / 10 ft                 | 48,000 lb | 410-4430  |
| Genie | SX-150XC | 152 ft          | 158 ft         | 750 lb            | 80 ft        | Diesel | 42 ft 8 in / 8 ft 2 in / 10 ft            | 49,950 lb | 410-4430  |
| Genie | SX-180   | 180 ft          | 186 ft         | 750 lb            | 80 ft        | Diesel | 42 ft 8 in / 8 ft 2 in / 10 ft            | 55,000 lb | 410-4440  |
| JLG   | 1850SJ   | 185 ft          | 191 ft         | 500/1,000 lb      | 80 ft        | Diesel | 47 ft 9 in / 8 ft 2 in / 10 ft Jib Stowed | 59,930 lb | 410-4440  |


# ProControl<sup>TM</sup>

NextGen



## Herc Rentals' live delivery and pick-up tracking.

Increase security and know exactly when your rented equipment will arrive or leave your job site.

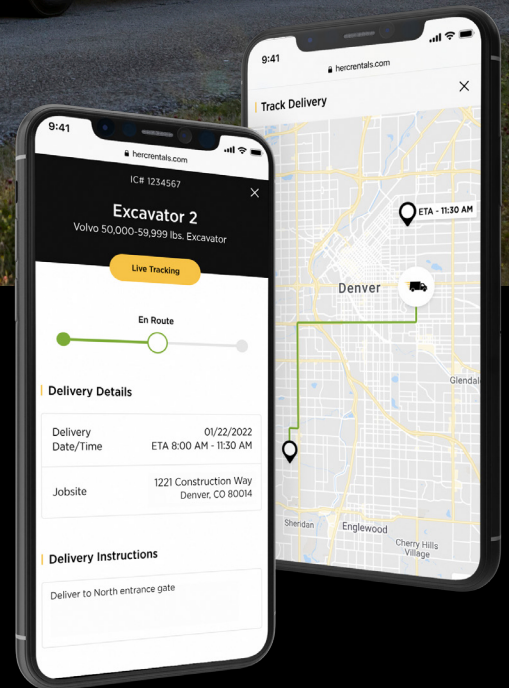

- Plan your workday based on when equipment will arrive
- Grant access to job sites at specified times to maintain security



Learn more at [HercRentals.com](https://www.HercRentals.com)

**HercRentals**<sup>®</sup>





# AIR TOOLS AND COMPRESSORS



## AIR COMPRESSORS

Portable Compressors  
 Large Compressors  
 Tow Behind Compressors  
 Electric Compressors  
 Dryers  
 Aftercoolers

## AIR TOOLS

Paving Breakers  
 Busters  
 Tampers  
 Rock Drills  
 Floor Nailers  
 Hammers  
 Diggers

Air Manifold  
 Post Drivers  
 Air Drills  
 Air Grinders  
 Air Saws  
 Air Impact Wrenches  
 Air Movers

## PORTABLE AIR COMPRESSORS



\*Eco Clean options available

Designed for finishing work with small air tools.

### Features and applications include:

- Electric and engine driven
- Thermal overload motor protection

**5-8 GAL**  
SINGLE STAGE



| MAKE   | MODEL        | CFM           | HP/MOTOR          | POWER | FITTING           | DIMENSIONS (LWH)            | WEIGHT | CAT CLASS |
|--------|--------------|---------------|-------------------|-------|-------------------|-----------------------------|--------|-----------|
| Mi-T-M | AM1-HE02-05M | 4.2 @ 90 psi  | 2.0 hp / Electric | 120V  | 3/8 Quick connect | 20.5 in / 15.5 in / 17.5 in | 61 lb  | 140-1020  |
| Mi-T-M | AM1-PE15-08M | 7.3 @ 90 psi  | 1.5 hp / Electric | 120V  | 3/8 Quick connect | 44.5 in / 18.5 in / 25 in   | 170 lb | 140-1040  |
| Mi-T-M | AM1-PH65-08M | 13.9 @ 90 psi | 196 cc Honda OHV  | Gas   | 3/8 Quick connect | 44.5 in / 18.5 in / 27 in   | 175 lb | 140-1100  |

## TOW BEHIND PORTABLE AIR

Designed to produce 100 to 150 psi and equipped with running gear for easy transportation.

**110-425 CFM | 8-12.6 HR** RUN TIME  
100% LOAD



### Features and applications include:

- User has ability to change pressure and flow settings during operation
- Ideal for powering handheld air tools, sandblasting, sprinkler and irrigation line blow-out, cable laying and pipeline testing

| MAKE        | MODEL      | CFM                                   | RUN TIME            | POWER           | DIMENSIONS (LWH)             | WEIGHT   | CAT-CLASS |
|-------------|------------|---------------------------------------|---------------------|-----------------|------------------------------|----------|-----------|
| Atlas Copco | XAS 110    | 110 cfm @ 100 psi                     | 8 hr @ full load    | 25 hp / Diesel  | 79 in / 48 in / 51 in        | 1,100 lb | 140-1220  |
| Atlas Copco | XAS 185    | 185 cfm @ 100 psi                     | 8 hr @ full load    | 49 hp / Diesel  | 139 in / 64 in / 58 in       | 2,105 lb | 140-1260  |
| Doosan      | C185       | 185 cfm @ 100 psi                     | 12.6 hr @ full load | 49 hp / Diesel  | 137.6 in / 68.5 in / 67.5 in | 2,455 lb | 140-1260  |
| Atlas Copco | XATS 400   | 397 cfm @ 150 psi                     | 8 hr @ full load    | 125 hp / Diesel | 161 in / 71.5 in / 70 in     | 4,555 lb | 140-1360  |
| Doosan      | P425-HP375 | 425 cfm @ 100 psi - 375 cfm @ 150 psi | 9-10 hr @ full load | 138 hp / Diesel | 152 in / 78 in / 70 in       | 5,030 lb | 140-1360  |

## LARGE AIR COMPRESSORS

These diesel-powered large portable air compressors and various pressure up to 150 psi

**825-1,600 CFM | 8-9.3 HR** RUN TIME  
100% LOAD



| MAKE        | MODEL              | CFM                                   | RUN TIME           | POWER           | DIMENSIONS (LWH)             | WEIGHT    | CAT-CLASS |
|-------------|--------------------|---------------------------------------|--------------------|-----------------|------------------------------|-----------|-----------|
| Doosan      | XP825/HP750WCU-T4F | 825 cfm @ 125 psi - 750 cfm @ 150 psi | 9.3 hr @ full load | 266 hp / Diesel | 203 in / 90.2 in / 88.5 in   | 9,720 lb  | 140-1380  |
| Doosan      | HP915WCU-T4F       | 915 cfm @ 150 psi                     | 8.7 hr @ full load | 305 hp / Diesel | 226.6 in / 82.6 in / 97.9 in | 11,382 lb | 140-1385  |
| Atlas Copco | XAS900JDT4F        | 867 cfm @ 100 psi - 750 cfm @ 150 psi | 8 hr @ full load   | 250 hp / Diesel | 203 in / 80 in / 86 in       | 7,980 lb  | 140-1460  |
| Doosan      | HPI600WCU-T4F-IQ   | 1,600 cfm @ 150 psi                   | 9 hr @ full load   | 580 hp / Diesel | 235 in / 90 in / 102 in      | 19,565 lb | 140-1480  |



## ELECTRIC AIR COMPRESSORS




Ideal for indoor jobs, these electric air compressors are quiet, don't require expensive fuel or produce fumes.

### Features include:

- Allows operator to set pressure at any level between 90 to 150 psi
- Delivers the exact flow necessary for an application—conserving power and allowing for easier operation

**240-1,521 CFM**  
**50-350 HP**

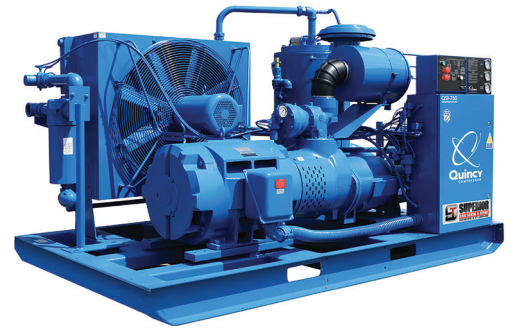

| MAKE   | MODEL    | CFM                 | POWER             | DIMENSIONS (LWH)          | WEIGHT    | CAT-CLASS |
|--------|----------|---------------------|-------------------|---------------------------|-----------|-----------|
| Quincy | QSI-50   | 240 cfm             | 50 hp / Electric  | 114 in / 48 in / 85 in    | 3,000 lb  | 140-1645  |
| Quincy | QSI-75   | 365 cfm             | 75 hp / Electric  | 116 in / 48 in / 85 in    | 3,500 lb  | 140-1660  |
| Quincy | QSI-100  | 500 cfm             | 100 hp / Electric | 116 in / 48 in / 85 in    | 4,500 lb  | 140-1670  |
| Quincy | QSI-150  | 750 cfm             | 150 hp / Electric | 128 in / 84 in / 85 in    | 11,000 lb | 140-1680  |
| Quincy | QSI-200  | 1,000 cfm           | 200 hp / Electric | 128 in / 84 in / 85 in    | 11,000 lb | 140-1690  |
| Quincy | QSI-350  | 15,00 cfm           | 350 hp / Electric | 142 in / 84 in / 85 in    | 15,742 lb | 140-1700  |
| Quincy | QSI-750  | 745 cfm @ 100 psi   | 150 hp / Electric | 116 in / 68 in / 76.25 in | 7,500 lb  | 140-1675  |
| Quincy | QSI-1500 | 1,521 cfm @ 100 psi | 300 hp / Electric | 132 in / 80 in / 89.25 in | 10,500 lb | 140-1695  |

## DRYERS + AFTERCOOLERS

Aftercoolers reduce the temperature of the compressed air but leave a substantial amount of moisture behind. That's where the dryers come in. Air dryers provide continuous dry air to the compressed air supply line.

**450-1,600 CFM** > **Hankison®**

### Features and applications include:

- Reduced risk of fire
- Protects downstream equipment from excessive heat
- Air driven motor fan
- Two-stage filtration, moisture and particulate
- Two to three-inch NPT male inlet and discharge connections
- After filter to remove desiccant dust—float-type drains on prefilter



| MAKE     | MODEL      | FLOW            | MAX INLET PRESSURE | POWER | DIMENSIONS (LWH)      | WEIGHT   | CAT-CLASS |
|----------|------------|-----------------|--------------------|-------|-----------------------|----------|-----------|
| Hankison | RDH450GAC  | 450-650 cfm     | 250 psi            | 120V  | 70 in / 50 in / 82 in | 2,200 lb | 140-2310  |
| Hankison | RDH930GAC  | 750-1,000 cfm   | 150 psi            | 120V  | 71 in / 75 in / 80 in | 3,800 lb | 140-2330  |
| Hankison | RDH1550GAC | 1,000-1,600 cfm | 150 psi            | 120V  | 97 in / 73 in / 81 in | 6,000 lb | 140-2350  |

# OIL FREE AIR SOLUTIONS QUICK REFERENCE

Cat Class 140-1695.


## Electric System

1500 CFM @ 125 PSI



## Diesel System

1500 CFM @ 125 PSI

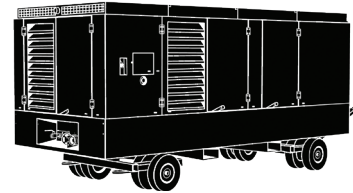

### Shore Power

Direct power for continuous operation

### Power



### Diesel Power

Requires daily refueling



**ZERO** Emissions

### Emissions

**4,320** Gal/Month

**71.5** sq ft (11 ft x 6.5 ft)

### Footprint

**119** sq ft (17 ft x 7 ft)

**No Berm Needed**

### Environmental

**Berm Required**  
Plus berm maintenance



**Unlimited Run Time**

### Max Run Time Before Fueling

**11 Hours**

|                                       | Electric       |
|---------------------------------------|----------------|
| CFM Volume                            | 1,500          |
| Max Run Time                          | 10 hr day      |
| KW Consumption Per Hour               | 261 KW         |
| KW Consumption Per Day                | 2,610 KW       |
| KW Costs Per Hour                     | \$0.07         |
| Work Hours Per Month**                | 200            |
| KW Cost Per Month                     | \$5,481        |
| Labor Costs to Refuel Per Month       | \$0            |
| <b>TOTAL OPERATING COST PER MONTH</b> | <b>\$5,481</b> |

|                                     | Diesel          |
|-------------------------------------|-----------------|
| CFM Volume                          | 1,500           |
| Max Run Time                        | 10 hr day       |
| Fuel Consumption Per Hour           | 21.6 gal        |
| Diesel Price Per Gallon AVG         | \$5.27          |
| Fuel Costs Per Hour                 | \$113.83        |
| Work Hours Per Month**              | 200             |
| Fuel Cost Per Month                 | \$22,766        |
| Labor Costs to Refuel Per Month     | \$299           |
| <b>TOTAL FUELING COST PER MONTH</b> | <b>\$23,065</b> |



## PAVING BREAKERS

Tough and dependable, built to take on big jobs like heavy demolition and concrete breaking.

### 33-91 LB



| MAKE          | APT             | APT             | APT             |
|---------------|-----------------|-----------------|-----------------|
| MODEL         | <b>M117</b>     | <b>M160</b>     | <b>M190</b>     |
| SHANK SIZE    | 1 in X 4-1/4 in | 1-1/8 in x 6 in | 1-1/8 in x 6 in |
| STROKE        | 3-3/8 in        | 4-1/8 in        | 6-1/8 in        |
| BPM           | 1,850           | 1,680           | 1,350           |
| CFM           | 34-48 @ 90 psi  | 60-65 @ 90 psi  | 75-80 @ 90 psi  |
| AIR INLET NPT | 3/8 in male     | 1/2 in male     | 3/4 in male     |
| WEIGHT        | 33 lb           | 68 lb           | 91 lb           |
| CAT-CLASS     | 120-1610        | 120-1640        | 120-1660        |

## CHIPPING HAMMERS

Scale, chisel or remove concrete build-up from the sides of cement mixers.

### 15 LB

| MAKE          | APT            |
|---------------|----------------|
| MODEL         | <b>264H</b>    |
| SHANK SIZE    | .580 hex       |
| STROKE        | 4 in           |
| BPM           | 1,375          |
| CFM           | 34-36 @ 90 psi |
| AIR INLET NPT | 7/8-24 in      |
| WEIGHT        | 15 lb          |
| CAT-CLASS     | 120-1520       |



## RIVET BUSTERS

Rivet removal, tank cutting, and general brick or concrete demolition.

### 33 LB

| MAKE          | APT                        | APT                        |
|---------------|----------------------------|----------------------------|
| MODEL         | <b>M133CN</b>              | <b>M1133</b>               |
| SHANK SIZE    | 1-3/16 in / 12 in or 18 in | 1-3/16 in / 12 in or 18 in |
| STROKE        | 8 in                       | 11 in                      |
| BPM           | 1,140                      | 850                        |
| CFM           | 42-46 @ 90 psi             | 48-52 @ 90 psi             |
| AIR INLET NPT | 1/2 in female              | 1/2 in female              |
| WEIGHT        | 30 lb                      | 33 lb                      |
| CAT-CLASS     | 120-2030                   | 120-2040                   |



## DIGGERS

Blast through clay, shale, hard pan and frozen ground with pneumatic clay diggers.

### 31 LB

| MAKE          | APT               |
|---------------|-------------------|
| MODEL         | <b>M1118</b>      |
| SHANK SIZE    | 7/8 in x 3-1/4 in |
| STROKE        | 3-3/8 in          |
| BPM           | 1,850             |
| CFM           | 34-36 @ 90 psi    |
| AIR INLET NPT | 3/8 in male       |
| WEIGHT        | 31 lb             |
| CAT-CLASS     | 120-1700          |



## ROCK DRILLS

Designed for construction, utility work, mining and quarries. Light, medium and heavy-duty models are available.

### 19-61 LB

| MAKE          | APT               | APT               | APT               |
|---------------|-------------------|-------------------|-------------------|
| MODEL         | <b>M115</b>       | <b>M137</b>       | <b>M155</b>       |
| SHANK SIZE    | 7/8 in x 3-1/4 in | 7/8 in X 3-1/4 in | 7/8 in X 3-1/4 in |
| STROKE        | 1-3/8"            | 2-5/8 in          | 3 in              |
| BPM           | 2,900             | 2,300             | 2,100             |
| CFM           | 32-36 @ 90 psi    | 85-90 @ 90 psi    | 110-120 @ 90 psi  |
| AIR INLET NPT | 3/8 in male       | 1/2 in male       | 3/4 in male       |
| WEIGHT        | 19 lb             | 38 lb             | 61 lb             |
| CAT-CLASS     | 120-1760          | 120-1780          | 120-1820          |



## TAMPERS

Fill holes, compact soil or pack asphalt with backfill tampers.

### 37 LB

| MAKE          | APT            |
|---------------|----------------|
| MODEL         | <b>M131</b>    |
| CHUCK SIZE    | 6 in round     |
| STROKE        | 5-1/2 in       |
| BPM           | 670            |
| CFM           | 38-42 @ 90 psi |
| AIR INLET NPT | 1/2 in female  |
| WEIGHT        | 37 lb          |
| CAT-CLASS     | 150-1720       |



## AIR MANIFOLD

Deliver compressed air to supply up to eight pneumatic tools simultaneously with air manifolds.

### Features and applications include:

- Conveniently assembled to save time
- Drain port can be partially opened to expel moisture build-up
- Pressure relief valve provides protection against excessive pressure build-up
- Tanks act as moisture separators by allowing particulates to fall out of main supply line

**15 GAL**  
TANK CAPACITY



| MAKE            | MODEL   | TANK CAPACITY | INLET                     | OUTLETS                                      | WORKING PRESSURE | WEIGHT | CAT-CLASS |
|-----------------|---------|---------------|---------------------------|--|------------------|--------|-----------|
| Texas Pneumatic | TX-2AMF | 15 gal (ASME) | (1) 2 in 4-prong coupling | (8) 3/4 in ball valves w/ crows ft couplings | 200 psi          | 63 lb  | 140-3580  |

## POST DRIVERS

Drive T-posts, fence posts, sign posts and more.

### Features and applications include:

- Anti-vibration dampening, cushion grip handle
- Rhino Tension Grip™ crankcase cover for fast inspection and maintenance
- High-grade virgin aluminum cast body
- Ideal for building fences, driving posts and tent stakes

**45-55 LB**



| MAKE  | MODEL        | CHUCK/BUTT SIZE | CFM @ 90 PSI | WEIGHT  | CAT-CLASS |
|-------|--------------|-----------------|--------------|---------|-----------|
| Rhino | PD-55        | 3-7/8 in        | 42           | 54.6 lb | 115-2600  |
| Rhino | MULTI-PRO XA | 2-1/2 in        | Gas          | 44 lb   | 115-2610  |

## AIR DRILLS

Ideal for drilling, sawing, valve guide reaming, cylinder honing, and wire brushing.

### Features and applications include:

- Quick-change keyless cutter system
- Ideal for the automotive industry and manufacturing

**1/2-3 IN**  
DIAMETER



| MAKE           | MODEL    | TYPE       | SIZE            | CFM         | FREE SPEED | CAT-CLASS |
|----------------|----------|------------|-----------------|-------------|------------|-----------|
| Cleco          | 15DP     | Horizontal | 1/2 in          | 15 @ 90 psi | 160 rpm    | 120-3500  |
| Ingersoll Rand | 728LA2   | Horizontal | 3/8 in          | 19 @ 90 psi | 3,800 rpm  | 120-3510  |
| CS Unitec      | 22404001 | Rotary     | 3 in            | 31 @ 90 psi | 0-625 rpm  | 100-1180  |
| CS Unitec      | MAB 525  | Magnetic   | 2 in - 2-1/2 in | N/A         | 580 rpm    | 130-1250  |
| CS Unitec      | ECO80AK  | Magnetic   | 3 in            | N/A         | 4 speed    | 130-1260  |

## AIR GRINDERS

Remove excess materials, smooth metal joints after welding or remove paint and primer.

### Features and applications include:

- Lube-free for reduced maintenance
- Ideal for close-quarter work in metal fabricating



| MAKE           | MODEL       | TYPE        | DIAMETER | ARBOR  | FREE SPEED | WEIGHT  | CAT-CLASS |
|----------------|-------------|-------------|----------|--------|------------|---------|-----------|
| Ingersoll Rand | HA120RP1045 | Right angle | 4.5 in   | 3/8 in | 12,000 rpm | 3.6 lb  | 120-3010  |
| Ingersoll Rand | 88V60P      | Batwing     | 7 in     | 5/8 in | 6,500 rpm  | 8.75 lb | 120-3020  |

## AIR IMPACT WRENCHES

Power and torque you need for high-speed bolting.

### Features and applications include:

- Lightweight and easy to use
- Comfortable, ergonomic handle boosts productivity

**3/8 - 1 1/2 IN**  
DRIVE SIZE



| MAKE           | MODEL    | DRIVE           | MAX TORQUE  | SPEED     | WEIGHT   | CAT-CLASS |
|----------------|----------|-----------------|-------------|-----------|----------|-----------|
| Cleco          | 9525     | 3/8 in          | 510 ft lb   | 8,000 rpm | 2.9 lb   | 135-2560  |
| Ingersoll Rand | MP-1700  | 1/2 in          | 370 ft lb   | 6,500 rpm | 5.3 lb   | 135-2580  |
| Ingersoll Rand | 2925Ti   | 3/4 in          | 1,450 ft lb | 5,200 rpm | 12 lb    | 135-2590  |
| Ingersoll Rand | 2925B2Ti | 1 in            | 1,600 ft lb | 6,500 rpm | 15.20 lb | 135-2600  |
| Ingersoll Rand | 3955B2Ti | 1-1/2 in        | 5,000 ft lb | 295 rpm   | 36.5 lb  | 135-2610  |
| Ingersoll Rand | 3955B1Ti | 1-1/2 in spline | 5,000 ft lb | 2,750 rpm | 34.6 lb  | 135-2620  |

## AIR SAWS

Cut through concrete, granite, heavy sections of aluminum, steel tubing, and more.

### Features include:

- Self-locking throttle
- Built-in lubricator
- Adjustable depth and angle of cuts

**2 3/8 - 8 1/4 IN**  
CIRCULAR AND RECIPROCATING



| MAKE           | MODEL       | TYPE          | BLADE SIZE         | AIR CONSUMPTION | CAT-CLASS |
|----------------|-------------|---------------|--------------------|-----------------|-----------|
| Ingersoll Rand | S80         | Circular      | 8-1/4 in           | 67 cfm @ 90 psi | 120-3600  |
| Ingersoll Rand | SRA010A1    | Reciprocating | 6 in - 12 in       | 51 cfm @ 90 psi | 120-3610  |
| CS Unitec      | 5 1212 0010 | Hack saw      | 6 in - 30 in       | 51 cfm @ 90 psi | 120-3620  |
| CS Unitec      | 5 6003 0010 | Portable band | 44-7/8 in x 1/2 in | 21 cfm @ 90 psi | 120-3630  |



## AIR MOVERS

High-powered, high volume ventilators are designed for exhausting fumes and delivering a fresh air supply.

### Features and applications include:

- Available with enclosed or explosion proof motors
- Spark resistant heavy-duty fan blades
- Ideal for use in refineries, chemical plants, metal fabrication plants, paper and pulp plants, shipyards, and the marine and steel industry

# 3 - 24 IN DIAMETER




| MAKE            | MODEL    | AIRFLOW              |                      |                       | INSIDE DIAMETER | DIMENSIONS (LWH)            | WEIGHT | CAT-CLASS |
|-----------------|----------|----------------------|----------------------|-----------------------|-----------------|-----------------------------|--------|-----------|
| COPPUS          | 175 CV   | 1,500 cfm            |                      |                       | 8 in            | 39 in / 11.4 in / 13.8 in   | 73 lb  | 700-1220  |
| Texas Pneumatic | TX-3-AM  | 60 psig - 863 cfm    | 80 psig - 1,067 cfm  | 100 psig - 3,698 cfm  | 3 in            | 32 in / 7.3 in / 7 in       | 10 lb  | 710-1220  |
| Texas Pneumatic | TX-6-AM  | 60 psig - 2,560 cfm  | 80 psig - 3,020 cfm  | 100 psig - 3,698 cfm  | 6 in            | 44 in / 11.2 in / 12.5 in   | 25 lb  | 710-1240  |
| Texas Pneumatic | TX-8-AM  | 60 psig - 2,560 cfm  | 80 psig - 3,020 cfm  | 100 psig - 3,698 cfm  | 8 in            | 46.5 in / 14.3 in / 14.3 in | 36 lb  | 710-1260  |
| Texas Pneumatic | TX-10-AM | 40 psig - 4,898 cfm  | 60 psig - 6,182 cfm  | 80 psig - 7,304 cfm   | 10 in           | 48 in / 16.8 in / 15.8 in   | 43 lb  | 710-1280  |
| Texas Pneumatic | TX-JF12  | 60 psig - 2,161 cfm  | 80 psig - 2,550 cfm  | 100 psig - 2,866 cfm  | 12 in           | 11 in / 12.3 in diameter    | 41 lb  | 710-1300  |
| Texas Pneumatic | TX-JF20  | 60 psig - 7,600 cfm  | 80 psig - 9,100 cfm  | 100 psig - 10,420 cfm | 20 in           | 12 in / 24.5 in diameter    | 96 lb  | 710-1360  |
| Texas Pneumatic | TX-JF24  | 60 psig - 11,005 cfm | 80 psig - 12,848 cfm | 100 psig - 16,136 cfm | 24 in           | 12 in / 31.3 in diameter    | 131 lb | 710-1320  |

**HercRentals**<sup>®</sup>

## Industrial Project and Tool Management

**Tool-Trailer On-sites** are designed for either short- or long-term use. In this fully customizable solution, customers are provided with a trailer packed with the tools they need. Customers also have the option of an in-house Herc Rentals technician or coordinator for any needed assistance for orders, tool management, tracking reports and more.

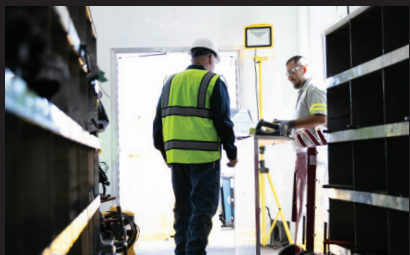



# CLIMATE CONTROL



## COOLING

Fans and Blowers  
 Evaporative Coolers  
 Portable 1-12 Ton AC  
 Water Cooled AC  
 5-25 Ton Packaged Units  
 20-80 Ton Industrial Units  
 Vertical AC Units  
 Chillers  
 Air Handlers

## HEATING

Direct Fired  
 Electric Heaters  
 Indirect Fired  
 Industrial Electric  
 Radiant / Specialty  
 Flameless  
 Self-Contained  
 Hydronic Surface  
 Hydronic Central Heat

## DRYING

LGR Dehumidifiers  
 Desiccant Dehumidifiers  
 Flood Extractor  
 Air Movers  
 Air Scrubbers  
 Dust Containment

## FANS AND BLOWERS

Fans and blowers reduce heat-related injuries, increase comfort and ventilate confined spaces.

### Features include:

- Fans are quiet, provide extreme airflow and range—up to 16,600 cfm
- Blowers provide airflow to confined spaces
- Ductable units available

**UP TO 16,600 CFM AIR FLOW**



| MAKE     | MODEL         | TYPE   | AIR FLOW   | DIMENSIONS (LWH)            | AMP DRAW   | WEIGHT | CAT-CLASS |
|----------|---------------|--|------------|-----------------------------|------------|--------|-----------|
| Master   | MB-PO813-DC25 | 8 inch confined space ventilator with 25 ft of 8 in duct | 930 cfm    | 36.3 in / 12.5 in / 14.5 in | 2.2A 115V  | 16 lb  | 700-1420  |
| Tempest  | 24-HD         | 24 inch high velocity ductable fan                       | 13,000 cfm | 28.8 in / 26 in / 34.5 in   | 13.4A 115V | 120 lb | 700-1180  |
| Tempest  | 24-HD-EP      | 24 inch high velocity ductable fan - explosion proof     | 13,000 cfm | 28.8 in / 26 in / 34.5 in   | 13.4A 115V | 125 lb | 700-1240  |
| Schaefer | VKM42-2-B-0   | 42 inch box fan  | 16,600 cfm | 45.5 in / 22 in / 45.8 in   | 12.3A 115V | 140 lb | 925-3126  |

## EVAPORATIVE COOLERS

A flexible cooling solution where traditional air conditioning is ineffective or cost-prohibitive.

### Benefits include:

- Effective outside
- Influence air temperature up to 30 degrees

**UP TO 14,000 CFM AIR FLOW PORTACOOL**



| MAKE                   | MODEL         | AIR FLOW   | DIMENSIONS (LWH)        | MOTOR    | AMP DRAW  | WEIGHT | CAT-CLASS |
|------------------------|---------------|------------|-------------------------|----------|-----------|--------|-----------|
| Portacool              | JETSTREAM 230 | 3,600 cfm  | 27 in / 29 in / 50 in   | 3/4 hp   | 8.3A 115V | 108 lb | 700-1630  |
| Portacool              | JETSTREAM 250 | 8,500 cfm  | 30 in / 52 in / 70 in   | 1 hp     | 6.6A 115V | 191 lb | 700-1635  |
| Portacool              | JETSTREAM 260 | 12,500 cfm | 30 in / 63 in / 77 in   | 1.5 hp   | 9.3A 115V | 212 lb | 700-1640  |
| Cleva Technologies     | Vector        | 9,000 cfm  | 20 in / 24 in / 72 in   | 1 hp     | 8A 115V   | 135 lb | 700-1632  |
| Cleva Technologies     | Spartan       | 12,500 cfm | 48 in / 30 in / 72 in   | 1-1/4 hp | 9A 115V   | 375 lb | 700-1634  |
| Breezer Mobile Cooling | PB10-A-06-B   | 14,000 cfm | 46 in / 29.5 in / 42 in | 1 hp     | 9A 115V   | 220 lb | 700-1280  |

## WATER COOLED AC UNITS

Water cooled AC units are best for areas where it's not possible to exhaust hot air through a ceiling tile, window or ducted opening. Instead of removing the heated air outside the space you're cooling, the heat is transformed to water and externally drained.

### Features include:

- Hoses to connect to any standard sink
- Designed to work in extremely hot areas
- No negative air pressure caused by ducting

**UP TO 60,000 BTU COOLING CAPACITY OCEANAIRE**



| MAKE      | MODEL   | CAPACITY      | POWER              | DIMENSIONS (LWH)                     | CAT-CLASS |
|-----------|---------|---------------|--------------------|--------------------------------------|-----------|
| OceanAire | OWC1811 | 18,000 btu hr | 115V 1PH 11.3A     | 13 in / 24.3 in / 40 in with casters | 718-1115  |
| OceanAire | OWC6012 | 60,100 btu hr | 208/230V 1PH 23.7A | 29 in / 27 in / 52 in with casters   | 718-1156  |
| OceanAire | OWC6032 | 60,100 btu hr | 208/230V 3PH 16.5A | 29 in / 27 in / 52 in with casters   | 718-1157  |
| OceanAire | OWC6034 | 60,100 btu hr | 460V 3PH 20A       | 29 in / 27 in / 52 in with casters   | 718-1158  |



## PORTABLE 1-5 TON AC UNITS

Designed to cool commercial spaces, portable 1-5 ton AC units require proper venting and most include both heating and cooling to maintain a constant temperature.

### Features and applications include:

- Highly efficient and quiet
- Built to fit through doors
- Provides spot cooling in high temperature areas
- Great for offices, industrial plants, server rooms, hospitals and laboratories

**UP TO 60,000 BTU**  
COOLING CAPACITY

MOVINCOOL.  
OCEANAIRE



| MAKE      | MODEL           | COOLING CAPACITY         | HEATING CAPACITY                | POWER              | DIMENSIONS (LWH)          | WEIGHT | CAT-CLASS |
|-----------|-----------------|--------------------------|---------------------------------|--------------------|---------------------------|--------|-----------|
| MovinCool | Climate Pro X14 | 1 Ton or 13,200 btu hr   | N/A                             | 115V 1PH 11.5A     | 22 in / 29 in / 48 in     | 165 lb | 718-1100  |
| MovinCool | Climate Pro D12 | 1 Ton 11,450 btu hr      | 9,900 btu hr                    | 115V 1PH 13.3A     | 22 in / 27 in / 47 in     | 181 lb | 718-1102  |
| MovinCool | Climate Pro 18  | 1.2 Ton or 14,600 btu hr | 13,700 btu hr                   | 115V 1PH 20A       | 21 in / 27 in / 49 in     | 214 lb | 718-1104  |
| MovinCool | Office Pro 60   | 5 Ton or 60,000 btu hr   | N/A                             | 208/230V 1PH 50A   | 30 in / 52 in / 64 in     | 623 lb | 718-1145  |
| Oceanaire | 20ACH 6012      | 5 Ton or 60,100 btu hr   | 52,500 btu hr                   | 208-2V 1PH 32A     | 39.5 in / 27.5 in / 52 in | 485 lb | 718-1146  |
| Oceanaire | 20ACH 6032      | 5 Ton or 60,100 btu hr   | 53,500 btu hr                   | 208/230V 3PH 20.4A | 40 in / 28 in / 52 in     | 485 lb | 718-1147  |
| Oceanaire | 20ACH 6034      | 5 Ton or 60,100 btu hr   | 53,500 btu hr                   | 460V 3PH 14.8A     | 40 in / 28 in / 52 in     | 520 lb | 718-1148  |
| KwiKool   | KP05-43H        | 5 Tons or 60,000 btu     | 12 kw heat strips or 41,600 btu | 460V/20A 3PH       | 34 in / 60 in / 65 in     | 764 lb | 718-1150  |
| Movincool | Office Pro 63   | 5 Ton or 60,000 btu hr   | N/A                             | 460V 3PH 9.5A      | 30 in / 52 in / 64 in     | 705 lb | 718-1155  |
| KwiKool   | KP05-23H        | 5 Tons or 60,000 btu     | 12 kw heat strips or 41,600 btu | 230V/50A 3PH       | 34 in / 60 in / 65 in     | 764 lb | 718-1160  |
| KwiKool   | KP05-21H        | 5 Tons or 60,000 btu     | 12 kw heat strips or 41,600 btu | 230V/50A 1PH       | 34 in / 60 in / 65 in     | 760 lb | 718-1162  |

## Turnkey Solutions

### Don't sweat the set up.

Our team provides superior white glove service and turnkey solutions, including set ups and installs, for any mission critical project.



## PORTABLE 5-12 TON AC UNITS

Large, portable commercial air conditioners are designed to provide high-volume conditioned air for indoor or outdoor applications

### Features and applications include:

- Ducts are easily extendable
- Target high ambient heat areas
- Can be used for cooling and heating
- Ideal for cooling warehouses, industrial plants or other commercial emergencies

**UP TO 102,000 BTU**  
COOLING CAPACITY

UNITED CoolAir KwiKool  
PORTABLE COOLING SYSTEMS



| MAKE           | MODEL         | COOLING CAPACITY | HEATING CAPACITY | POWER               | DIMENSIONS (LWH)                     | CAT-CLASS |
|----------------|---------------|------------------|------------------|---------------------|--------------------------------------|-----------|
| United CoolAir | PACH5N3AS15   | 5 Ton            | Up to 15kW       | 208-230V/3PH 47A    | 67 in / 30 in / 55 in                | 718-1160  |
| United CoolAir | PAC12G3A      | 12 Ton           | N/A              | 208/230V 3PH 73A    | 64 in / 43 in / 59 in                | 718-1300  |
| United CoolAir | MACH145G3AS30 | 12 Ton           | 102,360 btu      | 208/230V 3PH 60A    | 71 in / 78 in / 34.5 in              | 718-1302  |
| KwiKool        | KPO 12-23H    | 11 Ton           | 83,300 btu hr    | 208/230V 3PH 64/58A | 64 in / 32 in / 60 in - 8 in Casters | 718-1305  |
| KwiKool        | KPO 12-43H    | 11 Ton           | 83,300 btu hr    | 460V 3PH 28A        | 32 in / 64 in / 60 in                | 718-1310  |

## 5-25 TON PACKAGED AC UNITS

Packaged air conditioners provide energy-efficient cooling, heating or dehumidification of recirculated air.

**Features include:**

- Low ambient fan cycling control
- High- and low-pressure safety switches
- Single point electrical connections

**9-72 KW**  
HEATING CAPACITY



| MAKE | MODEL     | COOLING CAPACITY | HEATING CAPACITY | MOISTURE REMOVAL | POWER | STATIC PRESSURE     | DIMENSIONS (LWH)                    | WEIGHT   | NEMA RATING | CAT-CLASS |
|------|-----------|------------------|------------------|------------------|-------|---------------------|-------------------------------------|----------|-------------|-----------|
| CAPS | PPKH-5TD  | 5 Ton            | 20 kW            | 18 lb hr         | 460V  | 0.6 in @ 2,000 cfm  | 6 ft 6 in / 4 ft 4 in / 5 ft 9 in   | 1,400 lb | 4           | 718-1170  |
| CAPS | PPKH-5TD  | 5 Ton            | 9 kW             | 18 lb hr         | 460V  | 0.6 in @ 2,000 cfm  | 6 ft 6 in / 4 ft 4 in / 5 ft        | 1,200 lb | 7           | 718-1175  |
| CAPS | PPKH-10TD | 10 Ton           | 36 kW            | 32 lb hr         | 460V  | 2.2 in @ 4,000 cfm  | 8 ft 5 in / 6 ft / 5 ft 1 in        | 2,300 lb | 4           | 718-1210  |
| CAPS | PPKH-20TD | 20 Ton           | N/A              | 126 lb hr        | 460V  | 7.0 in @ 2,800 cfm  | 8 ft 11 in / 6 ft 7 in / 7 ft 10 in | 4,500 lb | 4           | 718-1500  |
| CAPS | PPKH-25TD | 25 Ton           | 72 kW            | 82 lb hr         | 460V  | 2.7 in @ 10,000 cfm | 12 ft 8 in / 8 ft 5 in / 5 ft 4 in  | 4,600 lb | 4           | 718-1610  |

## 20-80 TON INDUSTRIAL AC UNITS

Air-conditioning systems like 20-80 ton units include hybrid units and industrial high-static.

**Hybrid units** provide cooling, heating, dehumidification, 100% return air or 100% outside air operations.

**Industrial high-static** air conditioners provide cooling and dehumidification of return or outside air operations.

**Features and applications include:**

- Convenient electrical and duct work connections
- Rental-ready construction, controls, safeties and duct connections
- Stainless steel cabinet construction
- Ideal for petrochemical, food processing, manufacturing, hospitals, data centers, and commercial buildings

**120-136 KW**  
HEATING CAPACITY



| MAKE | MODEL        | COOLING CAPACITY | HEATING CAPACITY | MOISTURE REMOVAL | POWER | STATIC PRESSURE      | DIMENSIONS (LWH)                    | WEIGHT    | NEMA RATING | CAT-CLASS |
|------|--------------|------------------|------------------|------------------|-------|----------------------|-------------------------------------|-----------|-------------|-----------|
| CAPS | PPKH-20TD    | 20 Ton           | N/A              | 126 lb hr        | 460V  | 7.0 in @ 2,800 cfm   | 8 ft 11 in / 6 ft 7 in / 7 ft 10 in | 4,500 lb  | 7           | 718-1505  |
| CAPS | PPKH-40TD-GP | 40 Ton           | N/A              | 236 lb hr        | 460V  | 5.5 in @ 5,600 cfm   | 12 ft 9 in / 6 ft 8 in / 8 ft       | 6,300 lb  | 4           | 718-1800  |
| CAPS | PPKH-40TD-XP | 40 Ton           | N/A              | 237 lb hr        | 460V  | 5.5 in @ 5,600 cfm   | 12 ft 9 in / 6 ft 8 in / 8 ft       | 6,600 lb  | 7           | 718-1805  |
| CAPS | PPKH-40TD    | 40 Ton           | 120 kW           | 146 lb hr        | 460V  | 4.25 in @ 14,000 cfm | 16 ft 5 in / 7 ft 8 in / 6 ft 7 in  | 8,300 lb  | 4           | 718-1830  |
| CAPS | PPKH-60TD    | 60 Ton           | 136 kW           | 189 lb hr        | 460V  | 4.25 in @ 20,000 cfm | 20 ft / 8 ft 5 in / 8 ft 5 in       | 10,500 lb | 4           | 718-2030  |
| CAPS | PPKH-70-TD   | 70 Ton           | 136 kW           | 295 lb hr        | 460V  | 4.25 in @ 22,000 cfm | 101 in / 190 in / 102 in            | 11,700 lb | 4           | 718-2230  |
| CAPS | PPKH-80TD-GP | 80 Ton           | N/A              | 493 lb hr        | 460V  | 6 in @ 10,000 cfm    | 18 ft / 6 ft 10 in / 8 ft 4 in      | 9,800 lb  | 4           | 718-2300  |
| CAPS | PPKH-80TD-XP | 80 Ton           | N/A              | 493 lb hr        | 460V  | 6 in @ 10,000 cfm    | 18 ft / 6 ft 10 in / 8 ft 4 in      | 9,800 lb  | 7           | 718-2305  |

## VERTICAL AC UNITS

Deliver custom temperature control for temporary or long-term applications.

### Features and applications include:

- Dual stage heating and cooling circuits with hot gas bypass
- Easy access return air filter and double deflections supply air grille
- Ideal for tent cooling

**20-30 TON**  
COOLING CAPACITY



**UP TO 10,000 CFM**



| MAKE      | MODEL       | COOLING CAPACITY | HEATING CAPACITY | MOISTURE REMOVAL               | POWER | STATIC PRESSURE     | DIMENSIONS (LWH)        | WEIGHT   | NEMA RATING | CAT-CLASS |
|-----------|-------------|------------------|------------------|--------------------------------|-------|---------------------|-------------------------|----------|-------------|-----------|
| CAPS      | PPKV-20TD   | 20 Ton           | N/A              | 95 lb hr                       | 460V  | 1.25 in @ 8,000 cfm | 7 ft 7 in / 3 ft / 8 ft | 2,600 lb | 4           | 718-1520  |
| CAPS      | PPKV-20TD   | 20 Ton           | 72 kW            | 95 lb hr                       | 460V  | 1.25 in @ 8,000 cfm | 7 ft 7 in / 3 ft / 8 ft | 2,600 lb | 4           | 718-1525  |
| CAPS      | PPKV-30TD   | 30 Ton           | 60 kW            | 45 lb hr                       | 460V  | 3 in @ 10,000 cfm   | 8 ft / 6 ft / 8.6 in    | 3,100 lb | 4           | 718-1700  |
| Oceanaire | OVAC36034AH | 386,746 btu      | 245,664 btu      | Gravity drain with pump option | 480V  | 1.5                 | 95 in / 47 in / 88 in   | 3,507 lb | 100A        | 718-1700  |
| Oceanaire | OVAC24034AH | 267,345 btu      | 153,540 btu      | Gravity drain with pump option | 480V  | 1.5                 | 81 in / 44 in / 82 in   | 2,544 lb | 60A         | 718-1520  |

## CHILLERS

Self-contained chiller/pump packages are designed and constructed for user-friendly operation and provide state-of-the-art control for your everyday cooling needs.

### Features and applications include:

- Staged capacity with precise temperature control
- Shell and tube evaporator
- Applications include petrochemical, food processing, manufacturing, hospitals, data centers, and commercial buildings

**30-500 TON**  
COOLING CAPACITY

**150-1,500 GPM**



| MODEL      | COOLING CAPACITY | PUMP SIZE | CAP INLET                   | POWER | DIMENSIONS (LWH)                     | WEIGHT    | NEMA RATING | CAT-CLASS |
|------------|------------------|-----------|-----------------------------|-------|--------------------------------------|-----------|-------------|-----------|
| PCHH-30TC  | 30 Ton           | 150 gpm   | 6 in                        | 460V  | 14 ft 10 in / 4 ft 7 in / 5 ft 5 in  | 4,550 lb  | 4           | 718-1750  |
| PCHH-60TC  | 60 Ton           | 300 gpm   | 6 in                        | 460V  | 17 ft 10 in / 8 ft 5 in / 6 ft 10 in | 8,600 lb  | 4           | 718-2050  |
| PCHH-100TC | 100 Ton          | 300 gpm   | 4 in Dixon Quick Connect    | 460V  | 17 ft 1 in / 8 ft 4 in / 8 ft 6 in   | 11,000 lb | 4           | 718-2560  |
| PCHH-200TC | 200 Ton          | 600 gpm   | 4 in Dixon or 6 in. Flanged | 460V  | 24 ft 4 in / 8 ft 4 in / 8 ft 6 in   | 20,000 lb | 4           | 718-3060  |
| PCHH-500TC | 500 Ton          | 1,500 gpm | 6 in                        | 460V  | 22 ft 7 in / 8 ft 6 in / 8 ft 4 in   | 24,000 lb | 4           | 718-3090  |

## AIR HANDLERS

Chilled water air handlers are designed to provide large volume cooling and dehumidification by using a chilled water source.

### Features include:

- Quiet operation
- Horizontal includes supply and return air duct connections, VFD controlled indoor air blower

**50-140 TON**  
COOLING CAPACITY



| MAKE | MODEL      | COOLING CAPACITY | DUCT SIZE | SUPPLY DUCTS | RETURN DUCTS | POWER REQUIREMENTS | STATIC PRESSURE | DIMENSIONS (LWH)        | WEIGHT   | NEMA RATING | CAT-CLASS |
|------|------------|------------------|-----------|--------------|--------------|--------------------|-----------------|-------------------------|----------|-------------|-----------|
| CAPS | PAHH-50TC  | 50 Ton           | 20 in     | 2            | 4            | 460V               | 5 in            | 100 in / 83 in / 59 in  | 3,250 lb | 4           | 718-1950  |
| CAPS | PAHH-75TC  | 75 Ton           | 20 in     | 2            | 4            | 460V               | 5 in            | 108 in / 82 in / 64 in  | 3,400 lb | 4           | 718-1960  |
| CAPS | PAHH-120TC | 120 Ton          | 20 in     | 4            | 6            | 460V               | 5 in            | 144 in / 101 in / 64 in | 4,350 lb | 4           | 718-2650  |
| CAPS | PAHV-140TC | 140 Ton          | 20 in     | 4            | 8            | 460V               | 6.7 in          | 98 in / 50 in / 102 in  | 4,200 lb | 4           | 718-2660  |



# CHOOSING THE RIGHT HEATER



Diesel



Natural Gas



Propane



Electric



Indoor



Outdoor



Spill Containment



## DIRECT FIRED



AVAIL. BTU 111,000-1,500,000

**Features:**

- No Ducting
- Thermostats

**Ideal for:**

- Construction Sites
- Warehouses
- Large Open Places



## ELECTRIC



AVAIL. BTU 5,100-500,000

**Features:**

- 100% Clean, Dry Heat
- No Exhaust

**Ideal for:**

- Construction Sites
- Office Buildings
- Thawing Frozen Pipes



## INDIRECT FIRED



AVAIL. BTU 70,000-2,000,000

**Features:**

- 100% Clean, Dry Heat
- No Open Flames
- Exhaust Vented Outside

**Ideal for:**

- Construction Sites
- Temporary Structures, Events



## FLAMELESS



AVAIL. BTU 448,000-994,000

**Features:**

- No Open Flames
- Engine Driven
- Maximize Heat Delivery

**Ideal for:**

- Industrial Sites



## SELF-CONTAINED



AVAIL. BTU 770,000-1,200,000

**Features:**

- Built-in Generator
- Long Distance Ducting
- Flameless Options

**Ideal for:**

- Ground Thawing
- Ground Frost Prevention



## HYDRONIC SURFACE



AVAIL. BTU 234,000-348,000

**Features:**

- Long Run Times
- Spill Containment
- Self-Contained

**Ideal for:**

- Ground Thawing
- Concrete Curing

## DIRECT FIRED HEATERS

Extend heat into wide areas and provide for a comfortable work environment in the harshest conditions.

### Features and applications include:

- Equipped with 100% flame safeguard system
- Ideal for farms, warehouses, workshops, garages, construction sites and winter sports athletes



**UP TO 25 HR**  
RUN TIME

**UP TO 19,000 SF**  
HEATING AREA



| MAKE     | MODEL      | CFM   | BTU       | HEATING AREA | FUEL TYPE / CAPACITY            | VOLTAGE | RUN TIME | DIMENSIONS (LWH)      | WEIGHT (DRY) | CAT-CLASS |
|----------|------------|-------|-----------|--------------|---------------------------------|---------|----------|-----------------------|--------------|-----------|
| Heatstar | HS115TC    | 1,600 | 111,000   | 2,875 sq ft  | LP/NG / (2) 40 gal/ (1) 100 gal | 115V    | 25/18 hr | 30 in / 21 in / 21 in | 91 lb        | 715-0419  |
| Dewalt   | DXH170FAVT | 450   | 170,000   | 3,500 sq ft  | Propane / 100 gal external      | 110V    | 17 hr    | 26 in / 12 in / 17 in | 31 lb        | 715-0440  |
| Dewalt   | DXH190HD   | 450   | 190,000   | 4,750 sq ft  | Kerosene / 14 gal on board      | 120V    | 10 hr    | 40 in / 18 in / 21 in | 74 lb        | 715-0450  |
| Heatstar | HS250TC    | 2,100 | 249,000   | 6,250 sq ft  | LP/NG / (2) 100 gal             | 115V    | 23/16 hr | 33 in / 21 in / 31 in | 165 lb       | 715-0452  |
| Heatstar | HS400FAVT  | 1,400 | 400,000   | 9,000 sq ft  | Propane / (2) 100 gal external  | 120V    | 17 hr    | 39 in / 39 in / 22 in | 51 lb        | 715-0460  |
| Heatstar | HS3500DF   | 1,800 | 360,000   | 75,000 sq ft | Diesel/Kerosene / 27.7 gal      | 115V    | 9.5 hr   | 66 in / 27 in / 39 in | 227 lb       | 715-0470  |
| Flagro   | F-1500T    | 7,000 | 1,500,000 | 19,000 sq ft | LP/NG / External                | 115V    | N/A      | 61 in / 29 in / 38 in | 314 lb       | 715-0550  |

## ELECTRIC HEATERS



Provides safe, fast, dry, odorless heat for enclosed spaces.

### Features and applications include:

- No need for gas or propane
- 100% clean, dry heat - no moisture
- Ideal for emergency situations like heat loss, thawing of frozen pipes or heating for contractors and special events

**1.5-150 KW**

**UP TO 15,000 SF**  
HEATING AREA



## RENTAL TIP

When renting an electric heater, you will need to determine what type of electrical plug is required on your job site. If you are unsure you can always contact a Herc Rentals ProSolutions representative or an electrician.



| MAKE     | MODEL           | WATTS   | CFM    | BTU/HOUR          | HEATING AREA | VOLTAGE      | PHASE      | AMP RATING     | DIMENSIONS (LWH)              | WEIGHT | CAT-CLASS |
|----------|-----------------|---------|--------|-------------------|--------------|--------------|------------|----------------|-------------------------------|--------|-----------|
| Campo    | EB1.5E          | 1.5 kW  | 125    | 5,100             | 50 sq ft     | 120V         | 1PH        | 13A            | 10.88 in / 8.33 in / 12.27 in | 13 lb  | 715-0010  |
| Phoenix  | FIREBIRD COMP20 | 5-20 kW | 250    | 20,000            | 300 sq ft    | 120V         | 1PH        | 12A-48A        | 13 in / 12.5 in / 26 in       | 35 lb  | 715-0020  |
| Campo    | EB6/9E          | 6-9 kW  | 550    | 20,500 / 30,700   | 750 sq ft    | 240V         | 1PH        | 24.5A<br>36.5A | 23.5 in / 13.5 in / 17 in     | 45 lb  | 715-0030  |
| Fostoria | FES-1524-3E     | 15 kW   | 800    | 51,195            | 2,000 sq ft  | 240V         | 3PH        | 36A            | 23.2 in / 21.4 in / 39 in     | 65 lb  | 715-0040  |
| Fostoria | FES-1548-3E     | 15 kW   | 800    | 51,195            | 2,000 sq ft  | 480V         | 3PH        | 18A            | 23.2 in / 21.4 in / 39 in     | 65 lb  | 715-0045  |
| Campo    | EB18E           | 18 kW   | 1200   | 65,000            | 1,500 sq ft  | 208V<br>240V | 1PH<br>3PH | 86A<br>50A     | 35.5 in / 17.5 in / 20 in     | 120 lb | 715-0046  |
| Fostoria | FES-3048-3A     | 30 kW   | 1,100  | 102,390           | 2,000 sq ft  | 480V         | 3PH        | 36A            | 23.3 in / 22 in / 39 in       | 83 lb  | 715-0060  |
| Campo    | EB60E           | 60 kW   | 4,500  | 205,000 / 136,500 | 5,000 sq ft  | 240V<br>480V | 3PH        | 144A<br>72A    | 51.5 in / 22 in / 35.5 in     | 300 lb | 715-0070  |
| Campo    | EB150E480V      | 150 kW  | 14,500 | 512,000           | 15,000 sq ft | 480V         | 3PH        | 196A           | 68 in / 31.5 in / 56 in       | 950 lb | 715-0245  |

## INDIRECT FIRED

Operates like a mobile furnace with a fan forcing hot air over a heat exchanger where internal combustion takes place and with fumes exhausted through a stack.

### Features include:

- 100% clean, dry heat with no open flame
- Great for drying and emergency, temporary heating and special events
- Ducting allows units to be placed outside and away from tents while pushing warm air inside

**UP TO 2M BTU/H**  
INPUT PER HOUR



**flagro**  
USA INC.



| MAKE     | MODEL      | FUEL TYPE | BTU/H     | HEATING AREA | CFM/SP          | FUEL TANK | RUN TIME | VOLTAGE      | DIMENSIONS (LWH)          | WEIGHT (DRY) | CAT-CLASS |
|----------|------------|-----------|-----------|--------------|-----------------|-----------|----------|--------------|---------------------------|--------------|-----------|
| Heatstar | HSP70ID    | Diesel/K1 | 70,000    | 1,750 sq ft  | 910             | 11.6 gal  | 20 hr    | 120V         | 48 in / 17 in / 22 in     | 80 lb        | 715-0600  |
| Heatstar | HSP100ID   | Diesel/K1 | 122,000   | 3,050 sq ft  | 1,060           | 17 gal    | 19 hr    | 120V         | 48 in / 20 in / 41 in     | 165 lb       | 715-0605  |
| Campo    | EB200D     | Diesel/K1 | 175,000   | 5,000 sq ft  | 3,250 / 3 in    | 40 gal    | 32 hr    | 120V         | 48.5 in / 30.6 in / 65 in | 250 lb       | 715-0610  |
| Flagro   | FVO-200RC  | Diesel/K1 | 200,000   | 4,700 sq ft  | 1,500 / 3 in    | 23 gal    | 15 hr    | 115V         | 53.5 in / 27 in / 39.5 in | 280 lb       | 715-0610  |
| Campo    | EB200G     | LP/NG     | 175,000   | 4,700 sq ft  | 3,250 / 3 in    | External  | -        | 120V         | 48.5 in / 30.6 in / 65 in | 400 lb       | 715-0615  |
| Flagro   | FVNP-200RC | LP/NG     | 200,000   | 4,700 sq ft  | 1,500 / 3 in    | External  | -        | 115V         | 51.5 in / 27 in / 43.5 in | 330 lb       | 715-0615  |
| Campo    | EB400D     | Diesel/K1 | 396,000   | 7,000 sq ft  | 5,500 / 3 in    | 42 gal    | 14.9 hr  | 115V         | 76.7 in / 31 in / 57.6 in | 550 lb       | 715-0620  |
| Flagro   | FVO-400RC  | Diesel/K1 | 390,000   | 10,000 sq ft | 4,000 / 3 in    | 42 gal    | 14 hr    | 115V         | 70 in / 29 in / 54 in     | 455 lb       | 715-0620  |
| Campo    | EB400G     | LP/NG     | 399,000   | 7,000 sq ft  | 5,500 / 3 in    | External  | -        | 115V         | 76.7 in / 31 in / 57.6 in | 550 lb       | 715-0630  |
| Flagro   | FVNP-400RC | LP/NG     | 390,000   | 10,000 sq ft | 4,000 / 3 in    | External  | -        | 115V         | 70 in / 29 in / 49 in     | 470 lb       | 715-0630  |
| Campo    | EB600D     | Diesel/K1 | 588,000   | 12,000 sq ft | 5,500 / 3 in    | 42 gal    | 10 hr    | 120V         | 76.7 in / 31 in / 57.6 in | 600 lb       | 715-0631  |
| Campo    | EB600G     | LP/NG     | 575,000   | 12,000 sq ft | 5,500 / 3 in    | External  | -        | 120V         | 76.7 in / 31 in / 57.6 in | 600 lb       | 715-0632  |
| Campo    | BLAZE 1000 | DSL/LP/NG | 1,000,000 | 20,000 sq ft | 13,500 / 6.5 in | External  | -        | 208V<br>240V | 111 in / 33.3 in / 50 in  | 2,000 lb     | 715-0660  |
| Campo    | BLAZE 2000 | DSL/LP/NG | 2,000,000 | 40,000 sq ft | 16,000 / 6.5 in | External  | -        | 208V<br>240V | 144 in / 33.3 in / 67 in  | 2,950 lb     | 715-0695  |

## INDUSTRIAL ELECTRIC



Quiet and include a unique high static fan that allows for recirculation of warm inside air, resulting in even temperatures and energy savings in the most demanding environments.

### Features and applications include:

- Rugged, weatherproof enclosures for reliable operation outdoors
- Fits through 36-inch door and offers up to 200 feet of ducting
- Ideal for use in no-flame locations and where noise levels must be kept to a minimum

**UP TO 500K BTU**  
COOLING CAPACITY



| MAKE  | MODEL              | CAPACITY | BTU     | CFM / SP        | VOLTAGE | PHASE | AMP RATING | DIMENSIONS (LWH)        | WEIGHT   | CAT-CLASS |
|-------|--------------------|----------|---------|-----------------|---------|-------|------------|-------------------------|----------|-----------|
| CAPS  | PHUH-ONN-150 KEONN | 150 kW   | 512,000 | 8,000/5 in      | 480V    | 3PH   | 206A       | 96 in / 48 in / 50.6 in | 2,500 lb | 715-0240  |
| Campo | Blaze 150E         | 150 kW   | 500,000 | 14,500 / 6.5 in | 480V    | 3PH   | 196A       | 68 in / 31.5 in / 56 in | 950 lb   | 715-0240  |



## RADIANT AND SPECIALITY

Offer infrared heat and forced air heat by adopting a dual heating system. These heaters are lightweight, ultra-portable and can be used anywhere you need to stay warm, inside or out.

### Features and applications include:

- Not affected by mist
- Great for industrial, warehouse and warming outdoor construction crews

**UP TO 140K BTU**  
**COOLING CAPACITY**  
**HEATSTAR**  
by ENERCO



| MAKE     | MODEL   | HEAT OUTPUT         | FUEL TANK | POWER | FUEL TYPE | DIMENSIONS (LWH)      | WEIGHT | CAT-CLASS |
|----------|---------|---------------------|-----------|-------|-----------|-----------------------|--------|-----------|
| HEATSTAR | HSP60R  | 58,000 btu          | 2.9 gal   | 120V  | Kerosene  | 24 in / 15 in / 23 in | 21 lb  | 715-0408  |
| HEATSTAR | HSP125R | 102,000/146,900 btu | 14 gal    | 120V  | Kerosene  | 41 in / 30 in / 47 in | 149 lb | 715-0435  |

## FLAMELESS HEATERS

Capable of ducting long distances with minimal loss of air pressure or outlet temperature. Highly-efficient heated air output with unprecedented safety in portable DOT-approved trailer mounted packages.

### Features and applications include:

- Engine driven
- Permitted in “no open flame” areas
- Ideal for oil and gas, mining, construction and restoration industries

**UP TO 46 HR**  
**RUN TIME**  
**UP TO 994K BTU**  
**COOLING CAPACITY**




| MAKE     | MODEL  | BTU     | CFM/SP       | FUEL TANK | CONSUMPTION | RUN TIME | DIMENSIONS (LWH)              | WEIGHT   | CAT-CLASS |
|----------|--------|---------|--------------|-----------|-------------|----------|-------------------------------|----------|-----------|
| MAC      | 550F   | 448,000 | 3,500 / 5 in | 125 gal   | 2.6 gal hr  | 40 hr    | 176 in / 72 in / 82 in        | 3,800 lb | 715-1210  |
| MAC      | 750F   | 512,400 | 5,500 / 5 in | 165 gal   | 3.55 gal hr | 46 hr    | 192 in / 72 in / 85 in        | 5,720 lb | 715-1220  |
| Thawzall | XHR750 | 512,400 | 3,000-7,000  | 220 gal   | 7 gal hr    | 31 hr    | 15 ft 6 in / 8 ft / 6 ft 6 in | 8,417 lb | 715-1220  |
| MAC      | 950F   | 994,000 | 6,000 / 5 in | 165 gal   | 5.4 gal hr  | 30 hr    | 192 in / 72 in / 85 in        | 5,650 lb | 715-1230  |

## SELF-CONTAINED HEATERS

Provides powerful, clean, safe and reliable air and allows for ducting over long distances with minimal loss of pressure or temperature.

### Features and applications include:

- Multi-zone layout creates higher return temperatures
- Ideal for ground thawing, cold weather concrete warming/curing, pre-pour warming, ground frost prevention

**UP TO 1.2M BTU**  
**COOLING CAPACITY**  
 **MAC**  
A Generac Company



| MAKE    | MODEL           | BTU       | CFM/SP          | FUEL TANK | CONSUMPTION | RUN TIME | DIMENSIONS (LWH)         | WEIGHT   | CAT-CLASS |
|---------|-----------------|-----------|-----------------|-----------|-------------|----------|--------------------------|----------|-----------|
| Wacker  | HI 770XHD       | 770,000   | 4,000 / 4 in    | 235 gal   | 5.5 gal hr  | 40 hr    | 187 in / 94 in / 88 in   | 5,700 lb | 715-0810  |
| MAC     | 800G            | 800,000   | 3,900 / 3 in    | 175 gal   | 5.7 gal hr  | 31 hr    | 186 in / 2 in / 87 in    | 4,620 lb | 715-0810  |
| CAMPO   | EB1000CT        | 1,000,000 | 13,500 / 7.5 in | 300 gal   | 8.1 gal hr  | 42 hr    | 228 in / 74.5 in / 98 in | 5,200 lb | 715-0820  |
| MAC     | 1.2G            | 1,200,000 | 6,500 / 3 in    | 270 gal   | 8.6 gal hr  | 31 hr    | 252 in / 96 in / 103 in  | 7,000 lb | 715-0820  |
| Allmand | MAXI-HEAT 1MBTU | 1,030,000 | 3,530 / 3.1 in  | 210 gal   | 5.98 gal hr | 35 hr    | 184 in / 8 in / 84 in    | 3,625 lb | 715-0813  |

## HYDRONIC SURFACE HEATERS

Designed to operate on remote job sites. Their powerful burners heat up fluid that is pumped through a small hose and up to 3,000 feet in length.

### Features and applications include:

- Long, extended run times
- On-board fuel heater
- Spill containment and safety shut down sensors
- Ground thawing, cold weather concrete warming/curing, pre-pour warming, ground frost prevention

**UP TO 140 HR**  
RUN TIME

**UP TO 605K BTU**  
HEATING CAPACITY



| MAKE      | MODEL      | BTU     | THAWING CAPACITY | CURING CAPACITY | EFFICIENCY | FUEL TANK | FUEL CONSUMPTION | RUN TIME | DIMENSIONS (LWH)         | WEIGHT   | CAT-CLASS |
|-----------|------------|---------|------------------|-----------------|------------|-----------|------------------|----------|--------------------------|----------|-----------|
| THAWZALL  | TCH250     | 234,000 | 6,000 sq ft      | 18,000 sq ft    | 82%        | 160 gal   | 1.75 gph         | 72 hr    | 170 in / 84 in / 96 in   | 5,600 lb | 715-1010  |
| Flex-Temp | FUSION3000 | 234,000 | 6,000 sq ft      | 18,000 sq ft    | 87%        | 170 gal   | 1.75 gph         | 97 hr    | 178.5 in / 96 in / 91 in | 8,295 lb | 715-1010  |
| Wacker    | E3000      | 385,000 | 6,000 sq ft      | 18,000 sq ft    | 83%        | 230 gal   | 2.75 gph         | 140 hr   | 181 in / 91 in / 94 in   | 7,190 lb | 715-1020  |
| DryAir    | 400GTS     | 348,000 | 4,500 sq ft      | 6,000 sq ft     | 83%        | 150 gal   | 2.45 gph         | 60 hr    | 188 in / 76 in / 98 in   | 5,950 lb | 715-1020  |
| Heat King | HK300      | 311,000 | 2,800-5,600      | 5,600-11,200    | 82%        | 192 gal   | 2.24 gph         | 120 hr   | 14 in / 86 in / 83 in    | 7,835 lb | 715-1020  |
| Heat King | HK600      | 605,000 | 5,600-11,200     | 11,200-22,400   | 82%        | 192 gal   | 4.44 gph         | 60 hr    | 65 in / 75 in / 84 in    | 9,070 lb | 715-1030  |

## HYDRONIC HEATERS

Self-contained trailer-mounted hydronic heaters are designed to provide domestic and process hot water

### Features include:

- The two plate heat exchangers can also heat two different fluids simultaneously.
- Tri-fuel capable (diesel, natural gas and propane)

**UP TO 1.8M BTU**  
HEATING CAPACITY



| MAKE   | MODEL    | BTU       | FUEL CONSUMPTION |                       |                  | DIMENSIONS (LWH)          | WEIGHT   | CAT-CLASS |
|--------|----------|-----------|------------------|-----------------------|------------------|---------------------------|----------|-----------|
| DryAir | 1800 HHP | 1,792,000 | Diesel 12.8 gph  | Natural Gas 1,577 cfh | Propane 18.7 gph | 212 in / 93.5 in / 114 in | 9,000 lb | 715-1082  |

## HYDRONIC CENTRAL HEAT

This heater is for the most challenging heating projects whether it's providing temporary heat for construction sites or renovation projects in high rises, strip malls, schools or hospitals.

### Features and applications include:

- Modular plug and play design
- Can be converted to natural gas or propane
- Thawing and curing can take place while also heating structures
- Ideal for ground thawing, concrete curing, dehumidification or fluid heating

**UP TO 40,000 SF**

**UP TO 1.2M BTU**  
HEATING CAPACITY







| MAKE   | MODEL    | BTU       | HEAT CAPACITY | THAWING CAPACITY | CURING CAPACITY | DIMENSIONS (LWH)      | WET WEIGHT | DRY WEIGHT | CAT-CLASS |
|--------|----------|-----------|---------------|------------------|-----------------|-----------------------|------------|------------|-----------|
| DryAir | CHU-1200 | 1,200,000 | 40,000 sq ft  | 18,000 sq ft     | 48,000 sq ft    | 64 in / 57 in / 79 in | 4,100 lb   | 2,800 lb   | 715-1080  |

| MAKE   | MODEL   | TYPE                    | POWER REQUIREMENTS | FLUID LINE | OUTPUT    | BTU     | WEIGHT | CAT-CLASS |
|--------|---------|-------------------------|--------------------|------------|-----------|---------|--------|-----------|
| DryAir | HEFA80  | Portable heat exchanger | 120V 3.7A          | 3/4 in     | 900 cfm   | 80,187  | 90 lb  | 715-1210  |
| DryAir | HEFA200 | Portable heat exchanger | 120V 12.7A         | 1 in       | 2,300 cfm | 206,364 | 210 lb | 715-0100  |

# Any job, Any size, Anywhere!

Herc Rentals Emergency Response Team stands ready 24/7 to deliver the drying or climate control equipment critical to your recovery efforts following a catastrophic event. With a variety of delivery options based on the quantity of equipment needed for the cleanup, be it a leaking pipe in a home to drying, cooling or heating an entire distribution center, Herc Rental's Climate Remediation Centers (CRC) have the gear you need to tackle the job effectively, efficiently and safely.



|   |   |  |  |
|---|---|--|--|
|  | <b>13</b><br>PORTABLE COOLING<br>with heat option                             | <b>24-34</b><br>PORTABLE COOLING<br>with heat option                             | <b>72</b><br>PORTABLE COOLING<br>with heat option                            |
|  | <b>8-10</b><br>LGR DEHUMIDIFIERS<br>Removes 64-80 gallons of moisture per day | <b>30-40</b><br>LGR DEHUMIDIFIERS<br>Removes 480-640 gallons of moisture per day | <b>180</b><br>LGR DEHUMIDIFIERS<br>Removes 5,724 gallons of moisture per day |
|  | <b>20-30</b><br>AIR MOVERS<br>Total of 18,000-26,000 CFM                      | <b>70-100</b><br>AIR MOVERS<br>Total of 227K-325K CFM                            | <b>400</b><br>AIR MOVERS<br>Total of 354,000 CFM                             |
|  | <b>20-30</b><br>AIR SCRUBBERS<br>Total of 10,000-15,000 CFM                   | <b>75</b><br>AIR SCRUBBERS<br>Total of 37,000 CFM                                | <b>368</b><br>AIR SCRUBBERS<br>Total of 185,000 CFM                          |



## FLOOD EXTRACTOR

High vacuum and powerful lift pulls maximum water from carpet and pad.

### Features and applications include:

- A high flow, high volume clog-resistant sump pump handles up to ½ inch solids.
- Dual vacuum blowers with 2 inch inlet ensures maximum airflow
- Use the large toilet-height gravity drain for small jobs and easy tank cleanout
- Exhaust air passes through HEPA filter. Helps to prevent the spread of contaminants and odors

**UP TO 50 GPM**  
**12 GAL**  
**TANK CAPACITY**



| MAKE    | MODEL    | WATER REMOVAL | TANK   | POWER REQUIREMENTS |                          |                  | DIMENSIONS (LWH)            |        | WEIGHT   | CAT-CLASS |
|---------|----------|---------------|--------|--------------------|--------------------------|------------------|-----------------------------|--------|----------|-----------|
| Dri-Eaz | HVE 3000 | 50 gpm        | 12 gal | 120V 1PH           | 12A (Blower 1 + Pumpout) | 135A (+Blower 2) | 22.5 in / 40.2 in / 23.6 in | 132 lb | 105-1800 |           |

## LGR DEHUMIDIFIERS

Remove large amounts of water, moisture and prevent mold with LGR dehumidifiers.

### Features and applications include:

- Built-in humidistat
- Self-monitoring system
- Applications include restoration from water damage and construction drying

**UP TO 29.3 GPD**  
**12 GAL**  
**TANK CAPACITY**



| MAKE    | MODEL          | MOISTURE REMOVAL (MAX) | MOISTURE REMOVAL (AT AHAM) | CFM RATING | AMP RATING | DIMENSIONS (LWH)        |  | WEIGHT | CAT-CLASS |
|---------|----------------|------------------------|----------------------------|------------|------------|-------------------------|--|--------|-----------|
| Dri-Eaz | Revolution LGR | 10.1 gpd               | 8 gpd                      | 121-180    | 6.2        | 22 in / 18 in / 13 in   |  | 65 lb  | 719-2020  |
| Dri-Eaz | 7000XLI        | 29.3 gpd               | 16.2 gpd                   | 325        | 8.3        | 20 in / 20 in / 33.5 in |  | 107 lb | 719-2040  |

## DESICCANT DEHUMIDIFIERS



\*Eco Clean options available

Desiccant dehumidifiers remove moisture from the air using the chemical desiccant, thereby preventing corrosion, mold and mildew formation.

### Features and applications include:

- More effective at very low temperatures than refrigerator coil style units
- Electric, gas and propane models are available
- Ideal for water damage restoration, construction drying and industrial condensation prevention

**395-17,500 CFM**  
**UP TO 1,272 GPD**



| MAKE     | MODEL          | MOISTURE REMOVAL (MAX) | MOISTURE REMOVAL (AT AHAM) | CFM RATING | AMP RATING | DIMENSIONS (LWH)         |  | WEIGHT   | CAT-CLASS |
|----------|----------------|------------------------|----------------------------|------------|------------|--------------------------|--|----------|-----------|
| Arid-Dry | MS-2400        | 230 gpd                | 158 gpd                    | 2,400      | 60         | 92 in / 35 in / 63 in    |  | 1,110 lb | 719-1010  |
| Arid-Dry | MS-7500        | 735 gpd                | 577 gpd                    | 7,500      | 179        | 100 in / 50 in / 96 in   |  | 4,400 lb | 719-1030  |
| Arid-Dry | MS-18000/15000 | 1,272 gpd              | 1,061 gpd                  | 17,500     | 345        | 140 in / 100 in / 101 in |  | 9,500 lb | 719-1040  |

## AIR MOVERS

Air movers are an essential component of the drying process and water damage restoration.

### Features and applications include:

- Very low amp draw
- Easily portable
- Stackable for easy storage
- Ideal for drying floors, ceilings, walls and stairways

# 885-1,881 CFM



| MAKE    | MODEL          | CFM   | AMPS | DIMENSIONS (LWH)        | WEIGHT | CAT-CLASS |
|---------|----------------|-------|------|-------------------------|--------|-----------|
| Dri-Eaz | Ace TurboDryer | 1,881 | 1.5  | 19 in / 24 in / 20.3 in | 33 lb  | 925-3263  |
| Dri-Eaz | Velo Airmover  | 885   | 1.9  | 24 in / 9 in / 18 in    | 21 lb  | 925-3250  |

## AIR SCRUBBERS



Air scrubbers remove particles, gases and chemicals from the air.

### Features and applications include:

- Transports and stores easily due to compact design
- Excellent for mold abatement, restorations, construction, renovation and industrial applications

# UP TO 5,000 CFM



| MAKE                   | MODEL              | MAX CFM | FILTRATION | POWER     | DIMENSIONS                  | WEIGHT | CAT-CLASS |
|------------------------|--------------------|---------|------------|-----------|-----------------------------|--------|-----------|
| Dri-Eaz                | DefendAir HEPA 500 | 500     | 2-Stage    | 115V 3A   | 18.2 in / 26.2 in / 24.6 in | 44 lb  | 925-3310  |
| Abatement Technologies | PRED750            | 750     | 3-Stage    | 115V 1.9A | 25.5 in / 19.5 in / 20.5 in | 35 lb  | 925-3312  |
| Abatement Technologies | BD2KM              | 2,000   | 3-Stage    | 115V 10A  | 39.5 in / 28.5 in / 31.7 in | 117 lb | 925-3316  |
| Abatement Technologies | PAS2400            | 2,100   | 4-Stage    | 115V 12A  | 31.5 in / 25.3 in / 49.8 in | 170 lb | 925-3318  |
| International Ozone    | TITAN 4000         | 5,000   | N/A        | 115V 4A   | 26 in / 26 in / 12 in       | 38 lb  | 700-1725  |
| Husqvarna              | A 1200             | 1,200   | 2-Stage    | 120V 4.9A | 18 in / 27.5 in / 32 in     | 84 lb  | 925-3314  |



# Turnkey Solutions

## Don't sweat the set up.

Our team provides superior white glove service and turnkey solutions, including set ups and installs, for any mission critical project.





## CONTAINMENT CART



Containment carts protect patients, visitors, and hospital staff. It's the perfect solution to combat airborne particles released during ceiling cavity work.

### Features and applications include:

- Comes with HEPA air scrubber
- Ideal for computer cable and electrical wiring installation, HVAC equipment and ductwork, air filter change outs and much more




| MAKE         | DESCRIPTION                         | CAT-CLASS |
|--------------|-------------------------------------|-----------|
| AG800PAS-RPM | Containment cart with HEPA scrubber | 700-2100  |


# Get the app



Search and filter for better results

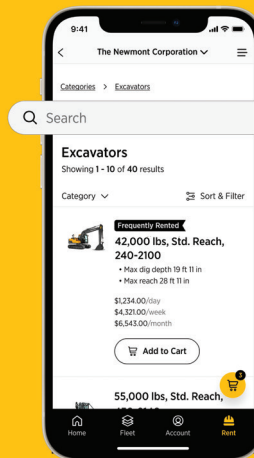

Product details under your thumb

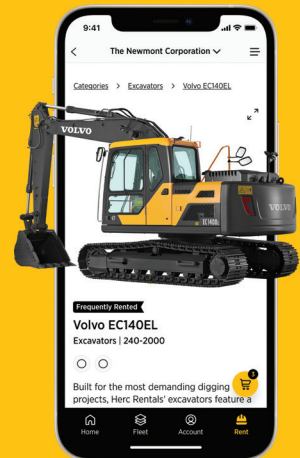





# COMPACTION AND PAVING



Plate Compactors  
Rammers  
Walk-behind Rollers  
Ride-on Asphalt Rollers  
Ride-on Soil Rollers

COMPACTION AND PAVING

## APPLICATION GUIDE



### Granular Soils

Consisting of small grains or particles.



Use a vibratory plate or smooth drum vibratory roller.



### Cohesive Soils

Clay, or soil with a high clay content.



Use a rammer or vibratory roller with a sheepfoot drum.



### Asphalt

Bituminous pitch with sand or gravel, used for surfacing roads.



Use a vibratory plate or smooth drum vibratory roller.

### SAND/GRAVEL

#### SINGLE DIRECTION PLATES

For smaller areas and shallow lifts less than 12 in



### SOIL

#### RAMMERS

For excavations 4 to 24 in wide, or adjacent to structures



### ASPHALT

#### SINGLE DIRECTION PLATES

For asphalt, patches and edging along curbs, light poles, etc.



#### REVERSIBLE PLATES

For areas with lifts deeper than 12 in



#### SMOOTH DRUM ROLLERS

For parking lots, sidewalks, etc.



#### SHEEPSFOOT ROLLER

For excavations 24 in wide, or adjacent to structures



#### RIDE-ON ROLLER

Compaction of asphalt, gravel sub base, driveways and more



## PLATE COMPACTORS

Designed to smooth and level the ground, with a vibrating, pounding action to flatten the ground in preparation for paving, landscaping or more.

### Features and applications include:

- Innovative guide handles limit vibration
- Reversible plate compactor
- Multi-directional plate compactor
- Ideal for road, path, driveway and parking lot construction, compaction of interlocking paving stones, sand, gravel and cohesive soils

UP TO **100 FPM**



| MAKE          | MODEL     | CENTRIFUGAL FORCE | BASE PLATE (LW)   | FUEL   | FWD/REV SPEED | DIMENSIONS (LWH)            | WEIGHT   | CAT CLASS |
|---------------|-----------|-------------------|-------------------|--------|---------------|-----------------------------|----------|-----------|
| Wacker Neuson | WP1550AW  | 3,375 ibf         | 19.5 in / 23 in   | Gas    | 0-100 fpm     | 34.5 in / 19.5 in / 38 in   | 194 lb   | 150-1260  |
| Multiquip     | MVC88VTHW | 3,372 ibf         | 20.7 in / 19.7 in | Gas    | 0-82 fpm      | 41.75 in / 19.5 in / 37 in  | 229 lb   | 150-1260  |
| Wacker Neuson | BPU3050A  | 6,750 ibf         | 34.4 in / 17.7 in | Gas    | 0-69 fpm      | 30.1 in / 22.4 in / 51.4 in | 366 lb   | 150-1460  |
| Wacker Neuson | BPU4045A  | 8,992 ibf         | 35.4 in / 17.7 in | Gas    | 0-79 fpm      | 30.7 in / 59.5 in / 41.7 in | 710 lb   | 150-1540  |
| Multiquip     | MVH308GH  | 10,116 ibf        | 34 in / 18 in     | Gas    | 0-79 fpm      | 61 in / 24 in / 48 in       | 717 lb   | 150-1540  |
| Wacker Neuson | DPU6555HE | 14,612 ibf        | 34 in / 21.7 in   | Diesel | 0-92 fpm      | 30.7 in / 59.5 in / 41.7 in | 1,091 lb | 150-1580  |

## RAMMERS

Designed for compaction of cohesive and mixed soils in confined areas, unlike plate compactors, rammers work best when compacting cohesive soils.

### Features and applications include:

- Unique 3-stage air filtration system provides a virtually dust-free engine
- Shock-mount handle system reduces hand-arm vibration
- Battery powered options available for indoor and sound-sensitive applications
- Ideal for landscapers and electrical and plumbing contractors

UP TO **699 BPM**



| MAKE          | MODEL    | FUEL    | IMPACT/FORCE | HP  | SHOE SIZE (WXL)   | MAX BPM | MAX STROKE | WEIGHT | CAT CLASS |
|---------------|----------|---------|--------------|-----|-------------------|---------|------------|--------|-----------|
| Multiquip     | MTR40SF  | Gas     | 1,215 ibf    | 2.8 | 5.9 in x 10.6 in  | 699     | 2.2        | 101 lb | 150-1060  |
| Wacker Neuson | BS50-4AS | Gas     | 3,597 ibf    | 3.2 | 11 in x 13 in     | 656     | 2.4        | 143 lb | 150-1070  |
| Multiquip     | MTX70HD  | Gas     | 3,350 ibf    | 2.8 | 11.2 in x 13.4 in | 690     | 3.1        | 165 lb | 150-1080  |
| Wacker Neuson | BS60-4AS | Gas     | 4,050 ibf    | 3.2 | 11 in x 13 in     | 690     | 3.1        | 158 lb | 150-1080  |
| Wacker Neuson | AS50E    | Battery | 3,597 ibf    | 2.8 | 11 in x 13.4 in   | 680     | 1.7        | 155 lb | 150-1120  |

## WALK-BEHIND ROLLERS

Delivering a powerful soil and asphalt compaction force making them ideal for road construction, patching asphalt and more.

### Features and applications include:

- Variable speed control in forward and reverse
- Dual sprinkler controls wet drums individually
- Safety system and ergonomic handle reduces vibration as well as operator fatigue

**22-32 IN**  
DRUM WIDTH



| MAKE          | MODEL    | DRUM WIDTH                    | DRUM TYPE     | GRADEABILITY | CENTRIFUGAL FORCE             | DIMENSIONS (LWH)            | WEIGHT   | CAT CLASS |
|---------------|----------|-------------------------------|---------------|--------------|-------------------------------|-----------------------------|----------|-----------|
| Wacker Neuson | RD7A     | 25 in                         | Smooth        | 40%          | 4,998 lb high / 2,935 lb low  | 93.1 in / 27.5 in / 45.7 in | 1,512 lb | 150-2020  |
| Wacker Neuson | RTKX-SC3 | 22 in / 32 in adjustable drum | Trench roller | 50%          | 15,400 lb high / 7,700 lb low | 73 in / 50 in / 32 in       | 3,235 lb | 150-2260  |
| Multiquip     | MRH800GS | 25 in                         | Smooth        | 30%          | 3,400 lb                      | 72 in / 41 in / 91 in       | 2,689 lb | 150-2020  |



## RIDE-ON ASPHALT ROLLERS

Highly efficient and designed to increase performance and reduce fuel consumption on small scale compaction projects.

### Features and applications include:

- Tier 4 Final emissions
- 360 degrees of visibility
- Reduced fuel consumption

**35-47 IN**  
DRUM WIDTH



**VOLVO**



| MAKE          | MODEL    | DRUM WIDTH | DRUM TYPE          | GRADEABILITY | CENTRIFUGAL FORCE | DIMENSIONS (LWH)             | WEIGHT   | CAT CLASS | PAD FOOT CAT CLASS |
|---------------|----------|------------|--------------------|--------------|-------------------|------------------------------|----------|-----------|--------------------|
| Wacker Neuson | RD12A-90 | 35 in      | Smooth double drum | 30%          | 3,400 lb          | 72 in / 41 in / 91 in        | 2,689 lb | 150-2820  | N/A                |
| Volvo         | DD25BW   | 47 in      | Smooth double drum | 30%          | 6,227 - 9,127 lb  | 95.3 in / 50.8 in / 116.3 in | 5,445 lb | 150-2860  | 150-2860           |

## RIDE-ON SOIL ROLLERS

Versatile machines that efficiently and effectively compact varying soils and aggregates in both small and large residential, commercial, and industrial site operations..

### Features and applications include:

- Fully integrated traction system increases stability
- Vibration frequency can be adjusted without leaving the cab
- Ideal for road projects, commercial and residential site development, utility installations, driveways and landscaping jobs

**54-84 IN**  
DRUM WIDTH

**VOLVO**



| MAKE  | MODEL  | DRUM WIDTH | DRUM TYPE          | FUEL   | GRADEABILITY | CENTRIFUGAL FORCE  | DIMENSIONS (LWH)            | WEIGHT    | CAT CLASS | PAD FOOT CAT CLASS |
|-------|--------|------------|--------------------|--------|--------------|--------------------|-----------------------------|-----------|-----------|--------------------|
| Volvo | SD45B  | 54 in      | Smooth single drum | Diesel | 45%          | 16,800-22,300 lb   | 164.6 in / 61 in / 111.4 in | 10,910 lb | 150-2730  | 150-2950           |
| Volvo | SD75B  | 66 in      | Smooth single drum | Diesel | 65%          | 21,600 - 29,700 lb | 198.6 in / 72 in / 115.1 in | 15,400 lb | 150-2760  | 150-2960           |
| Volvo | SD115B | 84 in      | Smooth single drum | Diesel | 65%          | 54,400 - 58,050 lb | 239.8 in / 90 in / 118.1 in | 25,651 lb | 150-2770  | 150-2970           |

**HercRentals**<sup>®</sup>

**We'll give you the tools...  
you provide the talent**

Learn more at [careers.hercrentals.com](https://careers.hercrentals.com)



# CONCRETE AND FLOORING



## CONCRETE

Concrete Scanner  
Rotary Drills  
Electric Breakers  
Core Drills  
Handheld Cutoff Saws  
Walk-behind Saws  
Tile Saws  
Buggies  
Mixers  
Trowels  
Vibrators

## FLOORING

Scrapers  
Grinders  
Shot Blasters  
Scarifiers  
Planers  
Scabblers  
Vacuums  
Sanders  
Buffers  
Buffer Pads  
Burnishers  
Burnisher Pads  
Sweepers  
Scrubbers  
Detergents  
Attachments




## WHAT YOU SHOULD KNOW ABOUT SILICA DUST

### What is Silica?

Silica is a common mineral found in materials we use for roads, buildings, and sidewalks. Exposures to silica dust can occur when cutting, drilling or crushing concrete, brick, or stone.

OSHA has reduced the permissible exposure limit of respirable crystalline silica averaged over an 8-hour shift by five times.



**250**Ug/m<sup>3</sup>  
Micrograms  
per Cubic Meter of Air



**50**Ug/m<sup>3</sup>  
Micrograms  
per Cubic Meter of Air

#### Why?

Evidence shows exposure to silica dust can lead to silicosis and lung cancer.

#### How?

OSHA's Table 1 provides solutions based on common construction site applications, offering the most simple methods of compliance.



**Table 1**—Specified Exposure Control Methods When Working With Materials Containing Crystalline Silica

### Compliance Starts Here

The OSHA ruling on respirable silica dust creates new standards for how dust must be managed in the workplace, affecting nearly every construction site application.

Herc Rentals makes it easy to protect your workforce, comply with new OSHA regulations, and maximize productivity on the job with our full line of dust control solutions.

#### Go Dustless

- Increase productivity
- Reduce cleaning time
- Maintain a more comfortable work environment

#### Increase Efficiency

- Reduce tool downtime
- Extend consumable usable life
- Increase visibility

#### Maximize Protection

- Avoid exposure to silica dust
- Prevent negative long term health effects
- Comply with OSHA regulations

Herc Rentals has the equipment and expertise needed to achieve optimal performance safely, efficiently and effectively.

Visit your local Herc Rentals branch today and ask about our OSHA compliant solutions.

### How We Can Help?

#### Create exposure control plans

Herc Rentals can provide exposure control plan templates for the most common work site applications.

#### Designate a key competent person




















Our training team can partner with your site supervisor to ensure they are fully aware of the new standard and its requirements.

#### Limit housekeeping practices

Sweeping can unnecessarily expose workers to silica dust. Herc Rentals has the vacuum systems needed to safely collect and contain silica dust.



# DUST CONTROL - QUICK REFERENCE CHART

| APPLICATION                    | EQUIPMENT   | ACCESSORIES   | VACUUM   |
|--------------------------------|---|---|--|
| Drilling and Chiseling SDS     | <p><b>TE 7-C</b><br/>CAT CLASS 100-1090</p>  <p><b>TE30-A</b><br/>CAT CLASS 100-1050</p>  <p>*Any SDS+ equipment</p>  | <p><b>Hollow Drill Bit</b><br/>MODEL TE-CD</p>  <p><b>DRS-S</b><br/>CAT CLASS 902-2512</p>  |  |
| Drilling and Chiseling SDS Max |  <p><b>TE 70 - ATC</b><br/>CAT CLASS 100-1140</p> <p>*Any SDS Max equipment</p>  | <p><b>Hollow Drill Bit</b><br/>MODEL TE-YD</p>  <p><b>DRS-Y</b><br/>CAT CLASS 902-2518</p>  | <p><b>VC 150-10 XE</b><br/>CAT CLASS 105-1715</p>   |
| Breaking                       | <p><b>TE800 - AVR</b><br/>CAT CLASS 100-1250</p>  <p><b>TE1000 - AVR</b><br/>CAT CLASS 100-1260</p>  <p><b>TE - 1500 AVR</b><br/>CAT CLASS 100-1270</p>  | <p><b>DRS-B</b><br/>CAT CLASS 902-2515</p>   |  |
| Breaking                       |  <p><b>TE 2000</b><br/>CAT CLASS 100-1270</p> <p><b>TE 3000</b><br/>CAT CLASS 100-1300</p>  |  <p><b>DRS-3000</b><br/>CAT CLASS 902-2527</p>   |  |
| Grinding                       |  <p><b>DG 150</b><br/>CAT CLASS 100-4570</p>   |  <p><b>Vacuum Hose Adapter</b><br/>INCLUDED WITH THE DG 150</p>  | <p><b>VC 300-17 X</b><br/>CAT CLASS 105-1745</p>  |
| Floor Grinding and Scarifying  | <p><b>PG280</b><br/>CAT CLASS 100-4230</p>  <p><b>CPM-8-9H</b><br/>CAT CLASS 100-4310</p>  <p><b>2EC-NG-1.5</b><br/>CAT CLASS 100-4220</p>         |   | <p><b>VORTEX 200</b><br/>CAT CLASS 105-1725</p>   |
| Coring                         | <p><b>DD 150-U</b><br/>CAT CLASS 100-1440</p>  <p><b>DD 200</b><br/>CAT CLASS 100-1470</p>    |  <p><b>DD VP-U</b><br/>CAT CLASS 800-5021</p> <p>NO CHARGE ACCESSORY</p>  | <p><b>WMS-100</b><br/>CAT CLASS 105-1705</p>      |
| Sawing                         |  <p><b>DCH 300</b><br/>CAT CLASS 100-2700</p>  |   | <p><b>VC 300-17 X</b><br/>CAT CLASS 105-1745</p>  |
| Sawing                         |  <p><b>TS 420</b><br/>CAT CLASS 100-2730</p>   |  <p><b>Pressurized Water Tank</b><br/>CAT CLASS 903-2412</p>   |  |

## CONCRETE SCANNER

Provides real-time view of the inside of concrete and generates accurate images automatically. Locates rebar, post tension cable, metal and plastic conduits, glass-fiber cables, voids and wood in dry concrete structures

**12 IN**  
**SCAN DEPTH**  
**HILTI**



| MAKE  | MODEL     | POWER                         | SCAN DEPTH | RUN TIME | LOCALIZED ACCURACY | ACCURACY OF DEPTH INDICATED           | DIMENSIONS (LWH)          | WEIGHT | CAT CLASS |
|-------|-----------|-------------------------------|------------|----------|--------------------|---------------------------------------|---------------------------|--------|-----------|
| Hilti | PS 1000-B | Li-Ion battery - rechargeable | 12 in      | 4 hr     | +/- 0.5 in         | < 4 in: +/- 0.5 in > 4 in: +/- 15% in | 12.5 in / 5.6 in / 7.5 in | 5.4 lb | 100-1410  |

## ROTARY HAMMERS

Ergonomically designed drills offer the unmatched power you need for efficiently chiseling and drilling holes into concrete and masonry.

### Features include:

- Lightweight rotary hammer for chiseling and drilling
- Virtually dustless with DRS-S and DRS-Y dust collection systems

**8-22 LB**  
**WEIGHT CLASS**  
**HILTI**



| MAKE  | MODEL         | TYPE          | DRILLING CAPACITY | ACCESSORY | SPEED     | IMPACT FREQUENCY | POWER         | WEIGHT | CAT CLASS |
|-------|---------------|---------------|-------------------|-----------|-----------|------------------|---------------|--------|-----------|
| Hilti | TE 7-C        | Rotary hammer | 1/4-5/8 in        | SDS-plus  | 0-740 rpm | 4,020 ipm        | 120V 1PH 6.3A | 8 lb   | 100-1090  |
| Hilti | TE 70-ATC-AVR | Combi hammer  | 1/2-6 in          | SDS-Max   | 0-360 rpm | 2,760 ipm        | 120V 1PH 15A  | 22 lb  | 100-1140  |

## ELECTRIC AND BATTERY BREAKERS



Designed to demolish concrete floors and walls.

### Features and applications include:

- Exceptionally low tool vibration
- Demolition of concrete slabs and foundations, roads, pipes and removing concrete for rebar connections and utility connections

**23-66 LB**  
**WEIGHT CLASS**  
**HILTI**



| MAKE  | MODEL       | MAX IMPACT | ACCESSORY    | IMPACT FREQUENCY | POWER        | LENGTH   | WEIGHT  | CAT CLASS |
|-------|-------------|------------|--------------|------------------|--------------|----------|---------|-----------|
| Hilti | TE 800-AVR  | 15 ft lb   | TE-Y         | 1,890 ipm        | 120V 1PH 15A | 23 in    | 23 lb   | 100-1250  |
| Hilti | TE 1000-AVR | 19 ft lb   | TE-S         | 1,950 ipm        | 120V 1PH 15A | 23 in    | 26 lb   | 100-1260  |
| Hilti | TE 2000-AVR | 26 ft lb   | TE-S         | 1,800 ipm        | 120V 1PH 15A | 29 in    | 32 lb   | 100-1270  |
| Hilti | TE 2000-22  | 28 ft lb   | TE-S         | 1,800 ipm        | 22V Battery  | 33 in    | 38 lb   | 100-1275  |
| Bosch | BH2770VCD   | 43 ft lb   | 1-1/8 in Hex | 1,000 ipm        | 120V 1PH 15A | 30.75 in | 63.2 lb | 100-1300  |
| Hilti | TE 3000-AVR | 50.4 ft lb | TE-H Hex     | 860 ipm          | 120V 1PH 15A | 32 in    | 66 lb   | 100-1300  |

## CORE DRILLS

Perfect tool for applications where either the core needs to be preserved or removed.

### Features include:

- Wet and dry applications
- Adjustable side handle with integrated dust and water management

**1/2-18 IN**  
**CAPACITY**  
**HILTI**



| MAKE  | MODEL   | TYPE                  | CAPACITY                   | AMP RATING | MOTOR   | POWER          | SPEEDS              | WEIGHT | CAT CLASS |
|-------|---------|-----------------------|----------------------------|------------|---------|----------------|---------------------|--------|-----------|
| Hilti | DD 150U | Handheld drill rig    | 1/2-6 in (handheld 0-3 in) | 19.5A      | 3-speed | 120V 1PH 19.5A | 780/1,520/2,850 rpm | 47 lb  | 100-1440  |
| Hilti | DD 250E | Core drill with stand | 1/2-18 in                  | 19.5A      | 3-speed | 120V 1PH 19.5A | 780/1,520/2,850 rpm | 81 lb  | 100-1470  |

## HANDHELD CUTOFF SAWS



\*Eco Clean options available

These lightweight saws are built to minimize vibrations while powering through hard material like asphalt, concrete, rebar, iron and steel.

**12-16 IN**  
BLADE SIZES

**4<sup>3</sup>/<sub>4</sub>-16 IN**  
CUTTING DEPTH

### PORTABLE WATER TANK

Provides water flow for wet-cutting attachments when pressurized water hose is not available.

2.6 Gallon | CAT CLASS: 903-2414



| MAKE      | MODEL              | VACUUM REQUIRED | POWER        | MAX BLADE SIZE | MAX CUTTING DEPTH | WEIGHT  | CAT CLASS |
|-----------|--------------------|-----------------|--------------|----------------|-------------------|---------|-----------|
| Hilti     | DCH 300            | 300 cfm         | 120V 1PH 20A | 12 in          | 4-3/4 in          | 20 lb   | 100-2700  |
| Hilti     | DSH 600-22         | N/A             | 22V          | 12 in          | 4-3/4 in          | 19.6 lb | 100-2705  |
| Hilti     | DSH 600-X          | N/A             | Gas          | 12 in          | 4-3/4 in          | 21.7 lb | 100-2720  |
| Hilti     | DSH 700-X          | N/A             | Gas          | 14 in          | 5 in              | 23.5 lb | 100-2730  |
| Stihl     | TS 420             | N/A             | Gas          | 14 in          | 4.9 in            | 21.2 lb | 100-2730  |
| Stihl     | TS 800             | N/A             | Gas          | 16 in          | 5.6 in            | 28 lb   | 100-2740  |
| Husqvarna | K 760 Cut-n-Break  | N/A             | Gas          | 9 in           | 16 in             | 21 lb   | 100-2780  |
| Husqvarna | K 4000 Cut-n-Break | N/A             | 120V 1PH 15A | 9 in           | 16 in             | 18.5 lb | 100-2775  |

## WALK-BEHIND SAWS

These low vibration walk-behind saw cut through concrete, asphalt, marble and stone.

**6-36 IN**  
BLADE SIZES

**1<sup>1</sup>/<sub>8</sub>-14<sup>3</sup>/<sub>4</sub> IN**  
CUTTING DEPTH



| MAKE      | MODEL                    | DRIVE          | FUEL         | BLADE SIZE | CUTTING DEPTH | DIMENSIONS (LWH)            | WEIGHT   | CAT CLASS |
|-----------|--------------------------|----------------|--------------|------------|---------------|-----------------------------|----------|-----------|
| Husqvarna | Early Entry Soff Cut 150 | Push           | Gas 4.3 hp   | 6 in       | 1-1/8 in      | 68 in / 19 in / 33.5 in     | 87 lb    | 100-2950  |
| EDCO      | SK-14-13H                | Push           | Gas 13 hp    | 14 in      | 4-3/4 in      | 48 in / 23 in / 38 in       | 190 lb   | 100-2810  |
| Husqvarna | FS513                    | Self-propelled | Gas 11.7 hp  | 20 in      | 7 in          | 66.93 in / 24 in / 47.24 in | 470 lb   | 100-2820  |
| Husqvarna | FS524                    | Self-propelled | Gas 20 hp    | 24 in      | 9-7 in        | 68.9 in / 26 in / 47.25 in  | 527 lb   | 100-2840  |
| Husqvarna | FS3500 G                 | Self-propelled | Gas 37 hp    | 30 in      | 12-3/4 in     | 56 in / 32 in / 45 in       | 972 lb   | 100-2850  |
| EDCO      | DS18-5B                  | Self-Propelled | Electric     | 18 in      | 6-3/4 in      | 50 in / 24.5 in / 39 in     | 265 lb   | 100-2870  |
| Husqvarna | FS5000D                  | Self-propelled | Diesel 47 hp | 36 in      | 14-3/4 in     | 56 in / 33.125 in / 51 in   | 1,700 lb | 100-2910  |

## TILE AND MASONRY SAWS



\*Eco Clean options available

Cut through blocks, bricks, pavers, tile and stone with these lightweight, precise, fast and easy to set up tile saws.

**10-14 IN**  
BLADE SIZES

**3-5 IN**  
CUTTING DEPTH



| MAKE      | MODEL          | POWER        | HP      | BLADE SIZE | CUTTING DEPTH | CUTTING LENGTH | WEIGHT | CAT CLASS |
|-----------|----------------|--------------|---------|------------|---------------|----------------|--------|-----------|
| Imer      | Combicut 250VA | 120V 1PH 15A | 1.75 hp | 10 in      | 3-3/4 in      | 28 in          | 85 lb  | 100-3220  |
| Husqvarna | MS 360         | 120V 1PH 15A | 1.5 hp  | 14 in      | 5 in          | 15 in          | 139 lb | 100-3070  |
| Husqvarna | MS 360G        | Gas          | 4.8 hp  | 14 in      | 5 in          | 17-3/4 in      | 170 lb | 100-3080  |



## CONCRETE BUGGY-PUSH

Designed to transporting concrete built with front rocker for easy dumping

**Features include:**

- 4.00 X 18 4 PLY Tubed Implement Tires Standard

**6 CU FT  
TUB CAPACITY**



| MAKE    | MODEL | TYPE                    | CAPACITY | DIMENSIONS (LWH)      | WEIGHT | CAT CLASS |
|---------|-------|-------------------------|----------|-----------------------|--------|-----------|
| Gar-Bro | 706-R | Walk-behind rocker cart | 6 cu ft  | 61 in / 32 in / 32 in | 170 lb | 100-1850  |

## CONCRETE BUGGIES-POWERED



\*Eco Clean options available

Designed to hold, carry and remove concrete and other debris from work sites.

**8-16 CU FT  
TUB CAPACITY**



Watch these carts in action



| MAKE      | MODEL       | TYPE                     | CAPACITY | PAYLOAD  | FUEL    | DIMENSIONS (LWH)             | WEIGHT   | CAT CLASS |
|-----------|-------------|--------------------------|----------|----------|---------|------------------------------|----------|-----------|
| Overland  | EC-C600-8FP | Wheeled walk-behind      | 8 cu ft  | 750 lb   | Battery | 62 in / 34 in / 38 in        | 289 lb   | 100-1862  |
| Multiquip | TB12PE      | Wheeled walk-behind      | 12 cu ft | 1,100 lb | Battery | 70.3 in / 33.4 in / 41.9 in  | 529 lb   | 100-1864  |
| Multiquip | WBH-16      | Wheeled ride-on platform | 16 cu ft | 2,500 lb | Gas     | 103 in / 44 in / 51 in       | 1,135 lb | 100-1870  |
| Toro      | MB TX 2500  | Tracked ride-on platform | 16 cu ft | 2,500 lb | Gas     | 105.5 in / 35.5 in / 47.7 in | 1,640 lb | 100-1890  |

## MIXERS



\*Eco Clean options available

Gas or electric powered concrete or mortar mixers for smaller jobs.

**Features include:**

- Polyethylene drums for easy cleaning
- Easy-tilting drum makes for accurate placement of materials

**3-9 CU FT  
DRUM CAPACITY**



| MAKE      | MODEL         | TYPE           | POWER      | CAPACITY   | DRUM TYPE | DIMENSIONS (LWH)          | WEIGHT | CAT CLASS |
|-----------|---------------|----------------|------------|------------|-----------|---------------------------|--------|-----------|
| Multiquip | MC3PEA        | Concrete       | 120V 1PH   | 3 cu ft    | Poly      | 48.5 in / 23.5 in / 34 in | 138 lb | 100-1620  |
| Imer      | Wheelman II   | Concrete       | 120V 1PH   | 5 cu ft    | Poly      | 52 in / 28 in / 57 in     | 101 lb | 100-1620  |
| Imer      | Mortarman 120 | Plaster/mortar | 120V 1PH   | 4.25 cu ft | Poly      | 33 in / 30 in / 50 in     | 286 lb | 100-1720  |
| Multiquip | MC94PH8       | Concrete       | Gas 7.9 hp | 9 cu ft    | Poly      | 102 in / 51 in / 59 in    | 656 lb | 100-1690  |
| Multiquip | WM90PH8       | Plaster/mortar | Gas 7.9 hp | 9 cu ft    | Poly      | 98 in / 50 in / 59 in     | 785 lb | 100-1770  |

CONCRETE AND MASONRY

CONCRETE + FLOORING

## CONCRETE BUCKET

Designed for placement of concrete without resting chute on the ground.

### Features include:

- Lightweight design
- Non-jamming, grout-tight, self-closing
- Double clamshell gates

**1 CU YD**  
TUB CAPACITY



| MAKE    | MODEL | RATED CAPACITY | LEVEL CAPACITY | LOADING HEIGHT | INSIDE DIAMETER | DIMENSIONS (LWH) | WEIGHT | CAT CLASS |
|---------|-------|----------------|----------------|----------------|-----------------|------------------|--------|-----------|
| Gar-Bro | 427-R | 1 cu yd        | 27.5 cu ft     | 46 in          | 54 in           | 60 in / 46 in    | 400 lb | 100-1920  |

## TROWELS

Finish and smooth wet concrete. Ideal for medium to large surface areas.

**36-46 IN**  
RING DIAMETER RANGE



| MAKE      | MODEL   | DRIVE       | ENGINE/POWER | RING DIAMETER | HANDLE TYPE | ROTOR SPEED | CAT CLASS |
|-----------|---------|-------------|--------------|---------------|-------------|-------------|-----------|
| Multiquip | J36H90H | Walk-behind | Gas 8.5 hp   | 36 in         | QuickPitch  | 90-155 rpm  | 100-2600  |
| Multiquip | B46H11H | Walk-behind | Gas 10.7 hp  | 46 in         | QuickPitch  | 90-155 rpm  | 100-2610  |

## VIBRATORS



\*Eco Clean options available

Compact and remove air voids in freshly poured concrete.

**UP TO 2.75 IN**  
HEAD DIAMETER



| MAKE          | MODEL   | TYPE                    | POWER    | SHAFT LENGTH | HEAD DIAMETER | WEIGHT  | CAT CLASS |
|---------------|---------|-------------------------|----------|--------------|---------------|---------|-----------|
| Wacker Neuson | M1500   | Handheld pencil         | 120V 15A | 6.5 in       | 1 in          | 10.9 lb | 100-2120  |
| Wacker Neuson | M2500   | Handheld standard       | 120V 15A | 354 in       | Up to 2.75 in | 12 lb   | 100-2120  |
| Wacker Neuson | IRFU57  | Handheld high frequency | 120V 12A | Up to 394 in | 2.2 in        | 44 lb   | 100-2230  |
| Wacker Neuson | BV50A-H | Backpack                | Gas      | Up to 198 in | Up to 2 in    | 29 lb   | 100-2360  |

# 100% COVERED

## with Rental Protection Plan (RPP)

The only premier equipment rental company that gives you peace of mind with 100% coverage on damaged or stolen gear.



### Theft

If your rental is stolen from your secured job site, file a police report and provide Herc Rentals with a copy.



### Damages

When accidental job site damage occurs, RPP will limit the cost of the repair. No need to submit a claim against your insurance.

### A Worry-Free Rental Experience!

By accepting our optional RPP on eligible equipment at the start of your rental, Herc Rentals will cover 100% of the equipment repair or replacement cost.\*

### What's Covered?

Accidental job site damages, and theft or vandalism if equipment was secured.\*

### What's NOT Covered?

Damage caused by negligence, exposure to corrosive materials, on the road motor vehicle collisions, theft or vandalism of equipment that was not secured.

\*Exclusions apply. Review our RPP terms and conditions for all requirements and exceptions.



Scan to review requirements and exceptions in our RPP Terms and Conditions





# SCRAPERS



\*Eco Clean options available

Ideal for removing floor coverings off wood or concrete floors.

## Applications include:

Removing plastic floor coverings, paint, chewing gum, parquet, ceramic, linoleum, ice, rubber-backed and glued-down carpeting, and epoxy.

# 18.5-2,572 LB

## OPERATING WEIGHT



| MAKE         | MODEL            | TYPE                          | TRAVEL SPEED     | VOLTAGE/HP                 | DIMENSIONS (LWH)      | WEIGHT   | CAT CLASS |
|--------------|------------------|-------------------------------|------------------|----------------------------|-----------------------|----------|-----------|
| EDCO         | ALR-E            | Handheld chisel scaler        | Manual           | Pneumatic 8 cfm @ 90 psi   | 66 in long            | 18.5 lb  | 100-4620  |
| National     | 550              | Manual push                   | Manual           | 115V 1HP 14A               | 33 in / 18 in / 43 in | 123 lb   | 100-4000  |
| Hilti        | TE 1000-AVR      | Manual push                   | Manual           | 120V 1PH 15A               | 28 in / 6 in / 12 in  | 26 lb    | 100-1260  |
| Makinex      | JHT-H            | Manual cart for Hilti TE1000  | Manual           | N/A                        | 43 in / 20 in / 43 in | 62 lb    | 100-1320  |
| National     | 6280HD GLADIATOR | Self-propelled                | Up to 30 ft min  | 115V 1.5 hp 14.7A          | 50 in / 18 in / 47 in | 490 lb   | 100-4025  |
| National     | 5700             | Ride-on                       | Up to 120 ft min | (12) 180 amp AGM batteries | 54 in / 25 in / 51 in | 2,244 lb | 100-4030  |
| National     | 7700             | Ride-on                       | Up to 200 ft min | (12) 200 amp AGM batteries | 59 in / 30 in / 51 in | 2,572 lb | 100-4035  |
| Blast It All | SSA4524V3        | Skid steer scraper attachment |                  |                            |                       |          | 290-2105  |

## EDCO CHISEL SCALER BLADES/HOLDER

| MAKE | MODEL  | DESCRIPTION                  | ALR-E | CAT-CLASS |
|------|--------|------------------------------|-------|-----------|
| EDCO | C10324 | Narrow chisel scaler 1.25 in | ●     | 902-5905  |
| EDCO | C10302 | Wide chisel scaler 4 in      | ●     | 902-5910  |
| EDCO | C10306 | 4-12 in scraper blade holder | ●     | 902-5920  |
| EDCO | C10329 | Scraper blade 4 in           | ●     | -         |
| EDCO | C10304 | Scraper blade 8 in           | ●     | -         |


## HILTI TE 1000 BLADES/HOLDER



| MAKE  | MODEL   | TYPE               | WIDTH | LENGTH  | CAT CLASS |
|-------|---------|--------------------|-------|---------|-----------|
| Hilti | 2079300 | Flex blade holder  | 6 in  | 24.9 in | 902-1140  |
| Hilti | 47893   | Flex chisel blades |       |         |           |


## NATIONAL SCRAPER HOLDERS

| MAKE     | MODEL   | DESCRIPTION        | 6280HD | 5700 7700 | CAT-CLASS |
|----------|---------|--------------------|--------|-----------|-----------|
| National | 7280-6  | 6 in blade holder  | ●      | -         | 902-6237  |
| National | 7280-12 | 12 in blade holder | ●      | -         | 902-6238  |
| National | 7050-6  | 6 in blade holder  | -      | ●         | 902-6230  |
| National | 7050-12 | 12 in blade holder | -      | ●         | 902-6234  |
| National | 7050-27 | 27 in blade holder | -      | ●         | 902-6236  |



## NATIONAL PREMIUM HIGH-TEMPERED BLADES


Best for glued-down carpets, VCT, VAT, rubber tile, cork, and re-scraping adhesive.



| MAKE     | MODEL    | DIMENSIONS LWH         | 550 | 6280HD | 5700 7700 |
|----------|----------|------------------------|-----|--------|-----------|
| National | 7050-200 | 3 in / 6 in / .062 in  | ●   | ●      | ●         |
| National | 7050-203 | 3 in / 12 in / .062 in | ●   | ●      | ●         |
| National | 7050-205 | 3 in / 27 in / .062 in | -   | -      | ●         |

## NATIONAL HEAVY-DUTY BLADES

Best for VCT, VAT, wood, tile, rubber, epoxy, elastomeric coatings, scraping thin-set, and glued ceramic.



| MAKE     | MODEL | DIMENSIONS LWH         | 550 | 6280HD | 5700 7700 |
|----------|-------|------------------------|-----|--------|-----------|
| National | 6285  | 3 in / 6 in / .094 in  | ●   | ●      | ●         |
| National | 6284  | 3 in / 12 in / .094 in | ●   | ●      | ●         |
| National | 6283  | 3 in / 27 in / .094 in | ●   | ●      | ●         |

## NATIONAL EXTRA HEAVY-DUTY BLADES

VCT, VAT, wood, tile, light ceramic, re-scraping thin-set and rubber, carpets, cork, elastomeric and urethane coatings.



| MAKE     | MODEL | DIMENSIONS LWH         | 550 | 6280HD | 5700 7700 |
|----------|-------|------------------------|-----|--------|-----------|
| National | 6290  | 3 in / 6 in / .187 in  | ●   | ●      | ●         |
| National | 6292  | 3 in / 12 in / .187 in | ●   | ●      | ●         |

## NATIONAL ANGLE SHANK WITH CARBIDE TIP


Remove ceramic and thin-set re-scraping. Light-duty commercial-grade ceramic tile and hardwood removal.



| MAKE     | MODEL   | DIMENSIONS LWH        | 6280HD | 5700 7700 | CAT-CLASS |
|----------|---------|-----------------------|--------|-----------|-----------|
| National | 7281-12 | 4 in / 2 in / .312 in | ●      | –         | 911-6305  |
| National | 7281-1  | 6 in / 1 in / .500 in | ●      | –         | 911-6300  |
| National | 7079-2  | 6 in / 2 in / .500 in | –      | ●         | 911-6310  |
| National | 7079-4  | 6 in / 4 in / .500 in | –      | ●         | 911-6320  |

## NATIONAL SCRAPER RAZOR BLADES/ HOLDERS

For super hard thin epoxies, thin mil coatings (like urethane paint).



| MAKE     | MODEL      | DESCRIPTION               | 6280HD | 5700 7700 | CAT-CLASS |
|----------|------------|---------------------------|--------|-----------|-----------|
| National | 7280-12RBH | 12 in blade holder        | ●      | –         | 902-6240  |
| National | 7050-12RBH | 12 in blade holder        | –      | ●         | 902-6235  |
| National | 368-12     | .937 / 12 / .045 in blade | ●      | ●         | N/A       |

## NATIONAL SELF-SCORING BLADES

Work on attached cushion, unitary or secondary backing, vinyl back, soft to medium PVC, linoleum, carpet tiles, soft cork, enhancer, and unibond hot melts.



| MAKE     | MODEL   | DIMENSIONS LWH         | 550 | 6280HD | 5700 7700 |
|----------|---------|------------------------|-----|--------|-----------|
| National | 6260-BD | 3 in / 6 in / .094 in  | –   | ●      | ●         |
| National | 6249-BU | 3 in / 12 in / .094 in | –   | ●      | ●         |

## NATIONAL ULTRA HD ANGLE SHANK WITH REMOVABLE CARBIDE TIP


Designed for removing hard goods.



| MAKE     | MODEL  | DESCRIPTION  | 5700 7700 | CAT-CLASS |
|----------|--------|--|-----------|-----------|
| National | 403112 | 2 in ultra HD shanks, 3 carbide tips, set screws, and tool | ●         | 902-6221  |
| National | 402394 | 3 carbide tips, set screws, and tool                       | ●         | N/A       |

## NATIONAL WOOD FLOOR SHANKS

Tough on wood floors either glued or nailed.

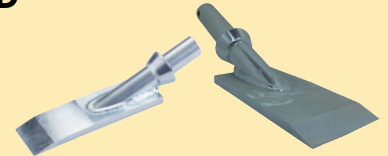

| MAKE     | MODEL  | DIMENSIONS LWH          | 6280HD | 5700 7700 | CAT-CLASS |
|----------|--------|-------------------------|--------|-----------|-----------|
| National | 7082-8 | 2.5 in / 8 in / .300 in | ●      | –         | 911-6340  |
| National | 7075-8 | 2 in / 8 in / .300 in   | –      | ●         | 911-6345  |
| National | 7077-8 | 3.5 in / 8 in / .300 in | –      | ●         | 911-6350  |

## SCABLERS

Roughen, reduce and level concrete. Prepare surfaces for coatings and finishes.

**8-24 IN**  
WORKING WIDTHS

**UP TO 250 SQ FT**  
PRODUCTION RATE PER HOUR



| MAKE   | MODEL    | VACUUM REQUIRED | TYPE             | POWER                       | PRODUCTION RATE    | WORKING WIDTH | WEIGHT  | CAT CLASS |
|--------|----------|-----------------|------------------|-----------------------------|--------------------|---------------|---------|-----------|
| UNITEC | 153.5200 | 200 cfm         | Handheld         | Pneumatic 15.9 cfm @ 90 psi | Up to 100 sq ft hr | 8 in          | 11.5 lb | 100-4400  |
| EDCO   | CD-5     | 300 cfm         | Walk-behind push | Pneumatic 160 cfm @ 100 psi | Up to 250 sq ft hr | 24 in         | 278 lb  | 100-4410  |

## EDCO TUNGSTEN CARBIDE SCABBLER BIT

| MODEL | TYPE                                     | CD-5 |
|-------|--|------|
| 18810 | 5 point bit for concrete - heavy texture | ●    |



## LINOLEUM ROLLER

Essential for all linoleum and vinyl flooring installations. Ensure a flat and level installation while the roller does all the work, helping to evenly distribute and flatten adhesive build-ups.

### Features and applications include:

- Segmented rollers which exert even pressure on uneven surfaces
- Removable handle

**15 IN**  
WORKING WIDTH



| MAKE    | MODEL  | TYPE                                     | WORKING WIDTH | WEIGHT | CAT CLASS |
|---------|--------|--|---------------|--------|-----------|
| Roberts | 10-952 | Manual walk-behind (Grainger PN: 12L723) | 15 in         | 100 lb | 911-6205  |

## GRINDERS



\*Eco Clean options available

Floor preparing, grinding, removal and polishing systems ideal for concrete, granite, marble and more.

### Features and applications include:

- Vacuum ports eliminate dust
- Capable of conquering small and large projects, including industrial use

**5-32 IN**  
WORKING WIDTHS



| MAKE      | MODEL       | VACUUM REQUIRED | TYPE                         | POWER              | PRODUCTION RATE          | WORKING WIDTH | WEIGHT   | CAT CLASS |
|-----------|-------------|-----------------|------------------------------|--------------------|--------------------------|---------------|----------|-----------|
| Hilti     | DGH 130     | 150 cfm         | Hand held / chamfer          | 120V 1PH 12A       | N/A                      | 5 in          | 5.6 lb   | 100-4560  |
| Hilti     | DG 150      | 300 cfm         | Hand held                    | 120V 1PH 16A       | N/A                      | 6 in          | 9 lb     | 100-4570  |
| Husqvarna | HTC 270EG   | 250 cfm         | Edge grinder                 | 240V 1PH 10A       | Up to 150 sq ft hr       | 10.6 in       | 121 lb   | 100-4236  |
| Husqvarna | PG 280      | 250 cfm         | Grinder / edge grinder       | 120V 1PH 15A       | Up to 150 sq ft hr       | 11 in         | 154.3 lb | 100-4230  |
| EDCO      | TG-10-11H   | 200 cfm         | Grinder                      | Gas 11 hp          | Up to 500 sq ft hr       | 10 in         | 180 lb   | 100-4250  |
| Husqvarna | PG 400      | 250 cfm         | Grinder                      | 240V 1PH 18A       | Up to 500 sq ft hr       | 16 in         | 254 lb   | 100-4239  |
| Husqvarna | PG 400 GAS  | 250 cfm         | Grinder                      | Gas 10.2hp         | Up to 500 sq ft hr       | 15.75 in      | 308 lb   | 100-4255  |
| Husqvarna | PG 450      | 250 cfm         | Grinder / polisher           | 120V 1PH 15A       | Up to 225 sq ft hr       | 18 in         | 240 lb   | 100-4237  |
| EDCO      | 2GC-NG-11H  | 200 cfm         | Grinder                      | Gas 11 hp          | Up to 500 sq ft hr       | 22 in         | 282 lb   | 100-4260  |
| EDCO      | 2EC-NG-1.5  | 200 cfm         | Grinder                      | 120/240V 1PH 16/8A | Up to 500 sq ft hr       | 22 in         | 258 lb   | 100-4220  |
| Husqvarna | PG 540      | 300 cfm         | Grinder / polisher           | 240V 1PH 30A       | Up to 440 sq ft hr       | 20 in         | 392 lb   | 100-4275  |
| Husqvarna | PG 690P     | 400 cfm         | Grinder / polisher           | Propane 22 hp      | Up to 1,300 sq ft hr     | 26.4 in       | 766 lb   | 100-4281  |
| Husqvarna | PG 830S     | 350 cfm         | Grinder / polisher           | 480V 3PH 22A       | Up to 150-1,320 sq ft hr | 32 in         | 1226 lb  | 100-4282  |
| OZTEC     | CG12E-DC7-H | Included        | Ceiling grinder 7 ft - 12 ft | 120V 1PH 12A+11A   | N/A                      | 7 in          | N/A      | 100-4290  |

## GRINDER RELATIVE PRODUCTION RATES (SQ FT/HR)

| APPLICATION                           | PG 280 | HTC 270 EG | PG 450 | PG 400 ELEC | PG 400 GAS | PG 540  | PG 690 P  | PG 830S   |
|---------------------------------------|--------|------------|--------|-------------|------------|---------|-----------|-----------|
| Thin surface contaminate removal      | 150    | 150        | 225    | 500         | 500        | 110-275 | 500-1,100 | 550-1,100 |
| Thick surface contaminate removal     | 80     | 80         | 80     | 400         | 400        | 88-275  | 325-760   | 330-880   |
| Smoothen rain damaged concrete        | 150    | 150        | 225    | 500         | 500        | 220-440 | 760-1,300 | 80-1,320  |
| Flatten exposed aggregate in concrete | 70     | 70         | 100    | 300         | 300        | 110-275 | 375-850   | 440-880   |
| Expose aggregate in concrete          | 30     | 30         | 70     | 200         | 200        | 66-275  | 200-760   | 280-880   |
| Preparation of clean concrete         | 150    | 150        | 225    | 400         | 400        | 165-385 | 450-1,150 | 550-1,320 |
| Scratch removal using metal diamonds  | 100    | 100        | 150    | 300         | 300        | 165-330 | 500-950   | 660-990   |
| Polishing                             | N/A    | N/A        | 150    | N/A         | N/A        | 275-440 | 760-1,300 | 880-1,320 |



## SHOT BLASTERS



A one-step method for stripping, cleaning and profiling floors in preparation for coatings and overlays.

### Features and applications include:

- Height-adjustable handle with built-in operator controls
- Front swivel casters increase maneuverability and control

**UP TO 2,000 SQ FT**  
**BLASTING CAPACITY PER HOUR**  
**8-10 IN**  
**WORKING WIDTHS**



| MAKE              | MODEL | VACUUM REQUIRED | TYPE        | BLASTING WIDTH | BLASTING CAPACITY | POWER        | DIMENSIONS (LWH)         | WEIGHT | CAT CLASS |
|-------------------|-------|-----------------|-------------|----------------|-------------------|--------------|--------------------------|--------|-----------|
| National Flooring | A95   | 200 cfm         | Walk-behind | 8 in           | Up to 430 sf hr   | 120v 1PH 17A | 43.4 in / 11 in / 41 in  | 121 lb | 100-4700  |
| National Flooring | A97   | 315 cfm         | Walk-behind | 10 in          | Up to 2,000 sf hr | 240v 3PH 25A | 63 in / 15.25 in / 44 in | 430 lb | 100-4705  |

### STEEL SHOT

| DESCRIPTION       | PART NUMBER |
|-------------------|-------------|
| S-330 / 50 lb bag | 3411        |

## MAGNETIC SHOT SWEEPER

Quickly pickup metal debris like shot and nails.

### Features include:

- Quick release handle

**24 IN**  
**WORKING WIDTH**



| MAKE              | MODEL | TYPE               | WORKING WIDTH | OVERALL WIDTH | APPROXIMATE LB PULL | WEIGHT | CAT CLASS |
|-------------------|-------|--------------------|---------------|---------------|---------------------|--------|-----------|
| National Flooring | 6552  | Manual walk-behind | 24 in         | 30.25 in      | 400 lb              | 41 lb  | 911-6650  |

## SCARIFIERS AND PLANERS



\*Eco Clean options available

A one-step method for leveling, removing, and texturing (scarifying) surfaces.

### Features include:

- Height-adjustable handle with built-in operator controls
- Vacuum port equipped

**UP TO 700 SQ FT**  
**PRODUCTION RATE PER HOUR**  
**8-10 IN**  
**WORKING WIDTHS**



| MAKE | MODEL      | VACUUM REQUIRED | POWER              | PRODUCTION RATE    | WORKING WIDTH | WEIGHT | CAT CLASS |
|------|------------|-----------------|--------------------|--------------------|---------------|--------|-----------|
| EDCO | CPL-8-1.5  | 200 cfm         | 115/230V 1PH 17.2A | Up to 250 sq ft hr | 8 in          | 145 lb | 100-4295  |
| EDCO | CPM8-5     | 200 cfm         | 230V 1PH 19.8A     | Up to 500 sq ft hr | 8 in          | 220 lb | 100-4300  |
| EDCO | CPM8-9H    | 200 cfm         | Gas 9 hp           | Up to 500 sq ft hr | 8 in          | 190 lb | 100-4310  |
| EDCO | CPM-10-13H | 200 cfm         | Gas 13 hp          | Up to 700 sq ft hr | 10 in         | 267 lb | 100-4320  |

## DUST CONTROL VACUUMS

## DROP BAG



\*Eco Clean options available

These industrial dust collectors comply with or exceed OSHA standards and are suitable to use when grinding, scraping, shot blasting, scarifying, and sawing.

### Features include:

- The Longopac® bag system ensures simple, dust-free bag changes.
- Both propane and electric models available

**UP TO 400 CFM**  
AIR FLOW



| MAKE      | MODEL    | LONGOPAC DUST BAG PN | AIR FLOW | POWER                 | WEIGHT | CAT CLASS |
|-----------|----------|----------------------|----------|-----------------------|--------|-----------|
| Husqvarna | S26      | 590429201            | 250 cfm  | 120V 1PH 20A 3.2 hp   | 105 lb | 105-1740  |
| Husqvarna | S36 120V | 590429201            | 300 cfm  | 120V 1PH 20A 3.2 hp   | 140 lb | 105-1746  |
| National  | DL4000P  | 402473               | 318 cfm  | 230V 3PH              | 386 lb | 105-1742  |
| Husqvarna | S36 240V | 590429201            | 300 cfm  | 240V 1PH 15.7A 4.8 hp | 140 lb | 105-1743  |
| Husqvarna | T8600    | 590429201            | 350 cfm  | 480V 3PH 14A 11.5 hp  | 454 lb | 105-1747  |
| Husqvarna | T8600P   | 590429201            | 400 cfm  | Propane 18 hp         | 628 lb | 105-1749  |

## DUST CONTROL VACUUMS

## CANNISTER

These industrial dust collectors comply with or exceed OSHA standards and are suitable for use when grinding, sawing, coring, and drilling.

**UP TO 300 CFM**  
AIR FLOW



| MAKE  | MODEL       | AIR FLOW | POWER         | WEIGHT | CAT CLASS |
|-------|-------------|----------|---------------|--------|-----------|
| EDCO  | Vortex 200  | 200 cfm  | 120V 1PH 16A  | 99 lb  | 105-1746  |
| Hilti | VC 300-17 X | 300 cfm  | 120V 1PH 9.2A | 26 lb  | 105-1743  |

## WET/DRY VACUUMS

## CANNISTER

Collect and contain dust, debris and water easier and more cost-effectively than ever.

**3.7-12.5 GAL**  
TANK CAPACITY

**150 CFM**  
FLOW



| MAKE         | MODEL          | TANK CAPACITY | RATED FLOW   | POWER         | CAT CLASS |
|--------------|----------------|---------------|--------------|---------------|-----------|
| Nilfisk/Alto | Attix 30 AS/E  | 8 gal         | 135 cfm air  | 120V 1PH 8.3A | 105-1630  |
| Karcher      | NT 30/1 Tact L | 8.2 Gal       | 150 cfm      | 120V 1PH 9A   | 105-1630  |
| Nilfisk/Alto | Attix 50 AS/E  | 12.5 gal      | 135 cfm air  | 120V 1PH 8.3A | 105-1650  |
| Hilti        | DD-WMS 100     | 3.7 gal       | .5 gpm water | 120v 1PH 9A   | 105-1705  |

## BUFFERS

Powerful floor machines for buffing, scrubbing, polishing, sanding, grinding, and carpet cleaning.

**17-20 IN**  
PAD SIZE

**UP TO 7,000 SQ FT**  
PRODUCTION RATE PER HOUR



| MAKE            | MODEL     | PAD SIZE | PAD SPEED              | POWER        | PRODUCTION RATE   | WEIGHT | CAT CLASS |
|-----------------|-----------|----------|------------------------|--------------|-------------------|--------|-----------|
| American Sander | FM1700 HD | 17 in    | 175 rpm                | 120V 1PH 15A | Up to 6,000 sf hr | 102 lb | 100-5410  |
| Pioneer Eclipse | 225FP 17  | 17 in    | 175 rpm                | 120V 1PH 15A | Up to 6,000 sf hr | 91 lb  | 100-5410  |
| Pioneer Eclipse | 225FP 20  | 20 in    | 175/320 rpm dual speed | 120V 1PH 15A | Up to 7,000 sf hr | 95 lb  | 100-5420  |

## BURNISHERS



\*Eco Clean options available

For high-speed burnishing and buffing to bring out the luster in hard surface floors. Available with dust control system.

**20-28 IN**  
PAD SIZE

**UP TO 10,000 SQ FT**  
PRODUCTION RATE PER HOUR



| MAKE            | MODEL      | PAD SIZE | PAD SPEED | POWER         | PRODUCTION RATE    | WEIGHT | CAT CLASS |
|-----------------|------------|----------|-----------|---------------|--------------------|--------|-----------|
| Tennant         | BR-2000-DC | 20 in    | 2,000 rpm | 120V 1PH 15A  | Up to 7,000 sf hr  | 92 lb  | 100-5430  |
| Pioneer Eclipse | 420BU      | 28 in    | 1,500 rpm | Propane 18 hp | Up to 10,000 sf hr | 234 lb | 100-5410  |

## SANDERS

Sand floors to professional results with highly productive, easy-to-use sanders.

### Features include:

- Dust collector system
- Easy sandpaper changing system

**7<sup>7</sup>/<sub>8</sub>-18 IN**  
WORKING WIDTHS



| MAKE            | MODEL    | TYPE                  | WORKING WIDTH | PAD SPEED | POWER        | WEIGHT | CAT CLASS |
|-----------------|----------|-----------------------|---------------|-----------|--------------|--------|-----------|
| American Sander | OBS-18DC | Random orbital sander | 18 in         | 3,600 vpm | 120V 1PH 10A | 125 lb | 100-5300  |
| American Sander | EZ-8     | Drum sander           | 8 in          | 1,800 rpm | 120V 1PH 12A | 105 lb | 100-5310  |
| American Sander | Super 7R | Edge sander           | 7-7/8 in      | 2,800 rpm | 120V 1PH 12A | 35 lb  | 100-5320  |

**WE OFFER A WIDE VARIETY OF SAND PAPER TYPES AND GRITS TO MEET YOUR WOOD FLOOR FINISHING NEEDS**



## FLOOR SWEEPERS



\*Eco Clean options available

Battery-powered walk-behinds and propane industrial rider sweepers will help keep your facility free of debris and dust.

### Features and applications include:

- Easy to clean and operate
- Collects debris in an easy-to-dump hopper
- Excellent for warehouses, walkways, malls, airports, and schools

**UP TO 134K SQ FT**  
**PRODUCTION RATE PER HOUR**  
**25-62 IN**  
**CLEANING WIDTH**



| MAKE    | MODEL         | TYPE                       | CLEANING WIDTH | HOPPER CAPACITY | POWER                | PRODUCTION RATE        | TRAVEL SPEED | WEIGHT   | CAT CLASS |
|---------|---------------|----------------------------|----------------|-----------------|----------------------|------------------------|--------------|----------|-----------|
| Tennant | S6            | Self-propelled             | 25 in          | 1.25 cu ft      | Battery              | Up to 18,750 sq ft hr  | 1.9 mph      | 139 lb   | 105-3580  |
| Tennant | S7            | Self-propelled             | 28 in          | 1.6 cu ft.      | Battery              | Up to 28,000 sq ft hr  | 1.9 mph      | 267 lb   | 105-3585  |
| Tennant | S10           | Self-propelled walk-behind | 34 in          | 2.8 cu ft       | Rechargeable battery | Up to 34,100 sq ft hr  | 2.9 mph      | 599 lb   | 105-3590  |
| Karcher | KM 85/50 R BP | Ride-on                    | 41.3 in        | 1.8 cu ft       | Rechargeable battery | Up to 54,900 sq ft hr  | 3.7 mph      | 555 lb   | 105-3598  |
| Tennant | S16           | Self-propelled             | 46 in          | 5.3 cu ft       | Battery              | Up to 111,302 sq ft hr | 3.0 mph      | 1,940 lb | 105-3605  |
| Tennant | S16H          | Self-propelled             | 46 in          | 350 lb          | Battery              | Up to 111,302 sq ft hr | 3.0 mph      | 1,940 lb | 105-3606  |
| Tennant | S20           | Ride-on                    | 50 in          | 11 cu ft        | Propane 24.8 hp      | Up to 103,840 sq ft hr | 6 mph        | 2,450 lb | 105-3600  |
| Tennant | S30           | Ride-on                    | 62.5 in        | 14 cu ft        | Propane 50 hp        | Up to 133,760 sq ft hr | 8 mph        | 3,570 lb | 105-3610  |

## FLOOR SCRUBBERS AND SWEEPER-SCRUBBERS



\*Eco Clean options available

Scrubbers are efficient, thorough, and hygienic, triple your scrub time while also reducing the risk of slip-and-fall accidents and chemical usage. Use sweeper-scrubbers to tackle your primary cleaning challenges.

### Features include:

- Ergonomically-designed
- Durable and easy to use
- Over three hours of continuous run time
- Floors clean, safe and dry in seconds

**UP TO 102K SQ FT**  
**PRODUCTION RATE PER HOUR**  
**15-48 IN**  
**CLEANING WIDTH**



| MAKE    | MODEL | TYPE                     | CLEANING WIDTH | SOLUTION TANK | RECOVERY TANK | TRAVEL SPEED | PRODUCTION RATE        | WEIGHT   | POWER                         | CAT CLASS |
|---------|-------|--------------------------|----------------|---------------|---------------|--------------|------------------------|----------|-------------------------------|-----------|
| Tennant | T1B   | Walk-behind scrubber     | 15 in          | 2.5 gal       | 3.4 gal       | N/A          | Up to 7,750 sq ft hr   | 110 lb   | Battery                       | 105-3702  |
| Tennant | T300  | Walk-behind scrubber     | 20 in          | 11 gal        | 14 gal        | 2.3 mph      | Up to 18,906 sq ft hr  | 400 lb   | Battery                       | 105-3710  |
| Tennant | T600E | Walk-behind scrubber     | 32 in          | 32 gal        | 37 gal        | 3.3 mph      | Up to 34,964 sq ft hr  | 1,036 lb | Battery                       | 105-3715  |
| Tennant | T7    | Self-propelled           | 32 in          | 29 gal        | 29 gal        | 2.9 mph      | Up to 56,320 sq ft hr  | 850 lb   | 80-160 lb down pressure       | 105-3715  |
| Tennant | T350  | Self-propelled           | 20 in          | 14.1 gal      | 18.4 gal      | 2.5 mph      | Up to 30,000 sq ft hr  | 725 lb   | 62 lb and 90 lb down pressure | 105-3717  |
| Tennant | T16   | Ride-on scrubber         | 36 in          | 50 gal        | 60 gal        | 5.6 mph      | Up to 55,440 sq ft hr  | 2,800 lb | Battery                       | 105-3720  |
| Tennant | T20   | Ride-on scrubber         | 40 in          | 80 gal        | 95 gal        | 8 mph        | Up to 88,000 sq ft hr  | 4,900 lb | Propane 55 hp                 | 105-3740  |
| Tennant | M20   | Ride-on sweeper-scrubber | 40 in          | 56 gal        | 73 gal        | 8 mph        | Up to 88,000 sq ft hr  | 3,300 lb | Propane 42.4 hp               | 105-3760  |
| Tennant | M30   | Ride-on sweeper-scrubber | 48 in          | 75 gal        | 95 gal        | 8 mph        | Up to 102,080 sq ft hr | 4,000 lb | Propane 42.4 hp               | 105-3765  |

# ProControl<sup>TM</sup>

NextGen



## Make any equipment service call a rapid response.

Managers, contractors and crew now have the power to log and manage a service call right from an easy-to-use and intuitive interface from their smart device.



Upload images, video, and audio to document the issue and give our service team a crystal-clear picture of your service needs.



Learn more at [HercRentals.com](https://www.HercRentals.com)

**HercRentals**<sup>®</sup>



# EARTH MOVING



Walk-behind Loaders  
Skid Steers  
Compact Track Loaders  
Compact Excavators  
Landscape Tractors  
Hydraulic Breakers  
Demolition Robots

Excavators  
Wheel Loaders  
Backhoes  
Vacuum Excavators  
Dozers  
Dust Suppression





# Choosing the right equipment for your job,

Rule over the earth and the job site with Herc Rentals earthmoving equipment. Simply consult the chart below to find the equipment you need, then contact your Herc Rentals representative to pinpoint the make and model that's right for your job!

| <p><b>SKID-STEERS</b></p> <p>IDEAL FOR: • DIGGING • DEMOLITION • HAULING</p>           | <table border="1"> <thead> <tr> <th>MODEL:</th> <th>S70</th> <th>S450</th> <th>S570</th> <th>SSV65</th> <th>S650</th> <th>SSV75</th> </tr> </thead> <tbody> <tr> <td>ROC*:</td> <td>700 lb</td> <td>1,300 lb</td> <td>1,950 lb</td> <td>1,950 lb</td> <td>2,690 lb</td> <td>2,690 lb</td> </tr> </tbody> </table>   | MODEL:          | S70          | S450            | S570         | SSV65        | S650      | SSV75     | ROC*:     | 700 lb   | 1,300 lb | 1,950 lb | 1,950 lb  | 2,690 lb  | 2,690 lb  |           |           |           |           |           |           |
|--|---|-----------------|--------------|-----------------|--------------|--------------|-----------|-----------|-----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| MODEL:   | S70   | S450            | S570         | SSV65           | S650         | SSV75        |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| ROC*:  | 700 lb  | 1,300 lb        | 1,950 lb     | 1,950 lb        | 2,690 lb     | 2,690 lb     |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| <p><b>COMPACT TRACK LOADERS</b></p> <p>IDEAL FOR: • DIGGING • DEMOLITION • HAULING</p> | <table border="1"> <thead> <tr> <th>MODEL:</th> <th>T590</th> <th>SVL65</th> <th>SVL95</th> <th>T740</th> </tr> </thead> <tbody> <tr> <td>ROC*:</td> <td>2,100 lb</td> <td>2,100 lb</td> <td>3,200 lb</td> <td>3,200 lb</td> </tr> </tbody> </table>  | MODEL:          | T590         | SVL65           | SVL95        | T740         | ROC*:     | 2,100 lb  | 2,100 lb  | 3,200 lb | 3,200 lb |          |           |           |           |           |           |           |           |           |           |
| MODEL:   | T590  | SVL65           | SVL95        | T740            |              |              |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| ROC*:  | 2,100 lb  | 2,100 lb        | 3,200 lb     | 3,200 lb        |              |              |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| <p><b>COMPACT EXCAVATORS</b></p> <p>IDEAL FOR: • DIGGING • DEMOLITION • GRADING</p>    | <table border="1"> <thead> <tr> <th>MODEL:</th> <th>E10</th> <th>K008</th> <th>E26</th> <th>E35i</th> <th>U35</th> <th>U55</th> <th>E50</th> </tr> </thead> <tbody> <tr> <td>WEIGHT:</td> <td>2,593 lb</td> <td>2,200 lb</td> <td>6,489 lb</td> <td>7,468 lb</td> <td>8,478 lb</td> <td>11,860 lb</td> <td>10,677 lb</td> </tr> </tbody> </table>   | MODEL:          | E10          | K008            | E26          | E35i         | U35       | U55       | E50       | WEIGHT:  | 2,593 lb | 2,200 lb | 6,489 lb  | 7,468 lb  | 8,478 lb  | 11,860 lb | 10,677 lb |           |           |           |           |
| MODEL:   | E10   | K008            | E26          | E35i            | U35          | U55          | E50       |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| WEIGHT:  | 2,593 lb  | 2,200 lb        | 6,489 lb     | 7,468 lb        | 8,478 lb     | 11,860 lb    | 10,677 lb |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| <p><b>EXCAVATORS</b></p> <p>IDEAL FOR: • DIGGING • DEMOLITION • GRADING</p>            | <table border="1"> <thead> <tr> <th>MODEL:</th> <th>EW60E</th> <th>ECR88D</th> <th>EC140EL</th> <th>EC145EL</th> <th>ECR160EL</th> <th>EC200EL</th> <th>ECR235EL</th> <th>EC300EL</th> <th>EC350EL</th> </tr> </thead> <tbody> <tr> <td>WEIGHT:</td> <td>12,970 lb</td> <td>19,600 lb</td> <td>33,700 lb</td> <td>36,990 lb</td> <td>42,390 lb</td> <td>50,995 lb</td> <td>57,720 lb</td> <td>72,260 lb</td> <td>86,500 lb</td> </tr> </tbody> </table> | MODEL:          | EW60E        | ECR88D          | EC140EL      | EC145EL      | ECR160EL  | EC200EL   | ECR235EL  | EC300EL  | EC350EL  | WEIGHT:  | 12,970 lb | 19,600 lb | 33,700 lb | 36,990 lb | 42,390 lb | 50,995 lb | 57,720 lb | 72,260 lb | 86,500 lb |
| MODEL:   | EW60E   | ECR88D          | EC140EL      | EC145EL         | ECR160EL     | EC200EL      | ECR235EL  | EC300EL   | EC350EL   |          |          |          |           |           |           |           |           |           |           |           |           |
| WEIGHT:  | 12,970 lb   | 19,600 lb       | 33,700 lb    | 36,990 lb       | 42,390 lb    | 50,995 lb    | 57,720 lb | 72,260 lb | 86,500 lb |          |          |          |           |           |           |           |           |           |           |           |           |
| <p><b>BACKHOE LOADERS</b></p> <p>IDEAL FOR: • DIGGING • DEMOLITION • HAULING</p>       | <table border="1"> <thead> <tr> <th>MODEL:</th> <th>310LEP ROPS</th> <th>310LEP ROPS EXT</th> <th>410L CAB EXT</th> </tr> </thead> <tbody> <tr> <td>HORSE POWER:</td> <td>69 hp</td> <td>69 hp</td> <td>113 hp</td> </tr> </tbody> </table>   | MODEL:          | 310LEP ROPS  | 310LEP ROPS EXT | 410L CAB EXT | HORSE POWER: | 69 hp     | 69 hp     | 113 hp    |          |          |          |           |           |           |           |           |           |           |           |           |
| MODEL:   | 310LEP ROPS   | 310LEP ROPS EXT | 410L CAB EXT |                 |              |              |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| HORSE POWER:   | 69 hp   | 69 hp           | 113 hp       |                 |              |              |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| <p><b>DOZERS</b></p> <p>IDEAL FOR: • FINAL GRADING</p>                                 | <table border="1"> <thead> <tr> <th>MODEL:</th> <th>450K</th> <th>650K</th> </tr> </thead> <tbody> <tr> <td>HORSE POWER:</td> <td>80 hp</td> <td>104 hp</td> </tr> </tbody> </table>  | MODEL:          | 450K         | 650K            | HORSE POWER: | 80 hp        | 104 hp    |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| MODEL:   | 450K  | 650K            |              |                 |              |              |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| HORSE POWER:   | 80 hp   | 104 hp          |              |                 |              |              |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| <p><b>WHEEL LOADERS</b></p> <p>IDEAL FOR: • LARGE HAULING</p>                          | <table border="1"> <thead> <tr> <th>MODEL:</th> <th>L70H</th> <th>L90H</th> <th>L110H</th> </tr> </thead> <tbody> <tr> <td>HORSE POWER:</td> <td>122 hp</td> <td>137 hp</td> <td>190 hp</td> </tr> </tbody> </table>  | MODEL:          | L70H         | L90H            | L110H        | HORSE POWER: | 122 hp    | 137 hp    | 190 hp    |          |          |          |           |           |           |           |           |           |           |           |           |
| MODEL:   | L70H  | L90H            | L110H        |                 |              |              |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |
| HORSE POWER:   | 122 hp  | 137 hp          | 190 hp       |                 |              |              |           |           |           |          |          |          |           |           |           |           |           |           |           |           |           |

\*Rated Operating Capacity

## WALK-BEHIND LOADERS




\*Eco Clean options available

The narrow track loaders feature best-in-class lifting power of 1,000 pounds while its 81-inch lift arms easily clear the sides of dumpsters and one-ton trucks.

### Features and applications include:

- Traction control for easy operation
- Ground speed of up to 4.7 mph
- Narrow track loaders are 33.7-inches wide while augers are 41-inches wide
- Ideal for landscaping and small utility projects

**UP TO 1,000 LB**  
OPERATING CAPACITY

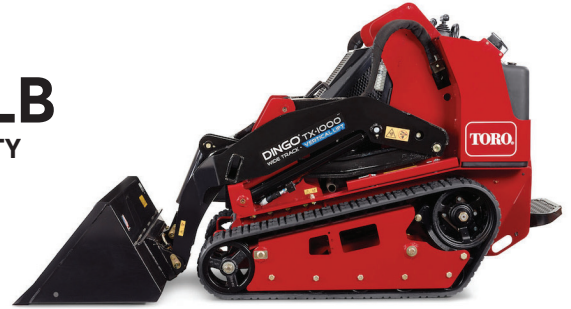

| MAKE | MODEL       | FUEL     | HP      | OPERATING CAPACITY | FUEL CAPACITY | DUMP HEIGHT | HYD PRESSURE / FLOW | GROUND PRESSURE | DIMENSIONS (LWH)            | WEIGHT   | CAT CLASS |
|------|-------------|----------|---------|--------------------|---------------|-------------|---------------------|-----------------|-----------------------------|----------|-----------|
| TORO | E Dingo 500 | Electric | 12 hp   | 600 lb             | N/A           | 47 in       | 3,250 psi / 6.5 gpm | 88.42 psi       | 82.2 in / 35.6 in / 48.7 in | 2,076 lb | 200-2015  |
| TORO | TX 427      | Gas      | 25 hp   | 535 lb             | 6 gal         | 46 in       | 3,000 psi /16.9 gpm | 5.0 psi         | 92 in / 41 in / 46.1 in     | 1,882 lb | 200-1020  |
| TORO | TX525       | Diesel   | 23 hp   | 553 lb             | 6 gal         | 66 in       | 3,000 psi /15.2 gpm | 5.4 psi         | 92 in / 33.7 in / 46.1 in   | 1,904 lb | 200-1030  |
| TORO | TX1000      | Diesel   | 24.9 hp | 1,075 lb           | 6 gal         | 81 in       | 3,000 psi /13.8 gpm | 5.0 psi         | 100.7 in / 41 in / 53.2 in  | 2,610 lb | 200-1040  |

## SKID STEERS

Zero-radius pirouette turning, making them extremely maneuverable and agile. Unlike conventional loaders, skid steer lift arms are alongside the driver.

### Features and applications include:

- Two-speed travel
- Dual steering levels
- Large, comfortable cab offers excellent visibility
- Includes sound-dampening features
- Ideal for construction, agriculture, landscaping and grounds maintenance

**UP TO 2,690 LB**  
OPERATING CAPACITY



| MAKE   | MODEL     | OPERATING CAPACITY | ENGINE        | DUMP HEIGHT | HYDRAULIC FLOW    | DIMENSIONS (LWH)           | OPERATING WEIGHT | CAT CLASS |
|--------|-----------|--------------------|---------------|-------------|-------------------|----------------------------|------------------|-----------|
| Bobcat | S70       | 700 lb             | 23 hp Diesel  | 94.5 in     | Standard 9.8 gpm  | 75.6 in / 36 in / 71.4 in  | 2,795 lb         | 200-1310  |
| Bobcat | S450      | 1,300 lb           | 49 hp, Diesel | 109.5 in    | Standard 16.7 gpm | 124.9 in / 62 in / 77.8 in | 5,027 lb         | 200-1350  |
| Bobcat | S570      | 1,950 lb           | 61 hp Diesel  | 119 in      | Standard 17.1 gpm | 133 in / 68 in / 77.8 in   | 6,480 lb         | 200-1350  |
| Bobcat | S570      | 1,950 lb           | 61 hp Diesel  | 119 in      | High 26.7 gpm     | 133 in / 68 in / 77.8 in   | 6,480 lb         | 200-1352  |
| Kubota | SSV65PF   | 1,950 lb           | 64 hp Diesel  | 121.5 in    | High 28.0 gpm     | 135.4 in / 69 in / 79.9 in | 6,790 lb         | 200-1352  |
| Bobcat | S650      | 2,690 lb           | 74 hp Diesel  | 124 in      | Standard 23 gpm   | 136 in / 74 in / 81.3 in   | 8,061 lb         | 200-1370  |
| Bobcat | S650      | 2,690 lb           | 74 hp Diesel  | 124 in      | High 30.5 gpm     | 136 in / 74 in / 81.3 in   | 8,061 lb         | 200-1373  |
| Kubota | SSV75PHFC | 2,690 lb           | 74 hp, Diesel | 128.3 in    | High 30.4 gpm     | 144.1 in / 74 in / 81.3 in | 8,157 lb         | 200-1373  |

## COMPACT TRACK LOADERS

Powerful, comfortable and versatile, these loaders deliver ideal rated operating capacity and operate efficiently even in soft, sandy, wet or muddy conditions.

### Features and applications include:

- Two-speed travel
- Five-link torsion suspension reduces cab vibration
- Includes sound-dampening features
- Ideal for construction, agriculture, landscaping and maintenance

**UP TO 3,200 LB**  
OPERATING CAPACITY

**Bobcat. Kubota.**



| MAKE   | MODEL    | OPERATING CAPACITY | ENGINE        | DUMP HEIGHT | HYDRAULIC FLOW    | DIMENSIONS (LWH)           | OPERATING WEIGHT | CAT CLASS |
|--------|----------|--------------------|---------------|-------------|-------------------|----------------------------|------------------|-----------|
| Bobcat | T450     | 1,400 lb           | 61 hp, Diesel | 109.5 in    | Standard 16.7 gpm | 126.6 in / 56 in / 77.8 in | 6,148 lb         | 200-1430  |
| Bobcat | T590     | 2,100 lb           | 66 hp, Diesel | 119 in      | Standard 17 gpm   | 133 in / 68 in / 77.8 in   | 7,822 lb         | 200-1450  |
| Kubota | SVL65-2  | 2,100 lb           | 68 hp, Diesel | 118.5 in    | Standard 17.4 gpm | 136 in / 65 in / 80 in     | 8,035 lb         | 200-1450  |
| Kubota | SVL75-2  | 2,300 lb           | 74 hp, Diesel | 119.1 in    | Standard 17.4 gpm | 140.8 in / 74 in / 82.0 in | 9,039 lb         | 200-1450  |
| Bobcat | T590     | 2,100 lb           | 66 hp, Diesel | 119 in      | High 26.7 gpm     | 133 in / 68 in / 77.8 in   | 7,822 lb         | 200-1452  |
| Kubota | SVL75-2F | 2,300 lb           | 74 hp, Diesel | 119.1 in    | High 29.3 gpm     | 140.8 in / 74 in / 82.0 in | 9,039 lb         | 200-1452  |
| Bobcat | T650     | 2,570 lb           | 74 hp, Diesel | 124 in      | Standard 23 gpm   | 136.8 in / 74 in / 81.3 in | 9,113 lb         | 200-1460  |
| Kubota | SVL95-2S | 3,200 lb           | 96 hp, Diesel | 128.5 in    | Standard 23.1 gpm | 154.6 in / 80 in / 83.3 in | 11,299 lb        | 200-1470  |
| Bobcat | T740     | 3,200 lb           | 74 hp, Diesel | 132 in      | Standard 23 gpm   | 141.6 in / 80 in / 81.3 in | 10,127 lb        | 200-1471  |

## COMPACT EXCAVATORS

Greater dig depth, specific arm configuration and zero, minimal or conventional tail swing.

### Features and applications include:

- Open or closed cabins
- Two-speed travel allows operators to reduce travel time across job sites or between jobs
- Blade float makes grading and leveling simple
- Multiple arm configurations and available extendable arm
- Ideal for construction job sites, road construction, utilities, landscaping and more

**UP TO 9,327 LB**  
LIFT CAPACITY

**Bobcat. Kubota.**



| MAKE   | MODEL | LIFT CAPACITY | HORSE POWER     | TAIL SWING   | MAX DIG DEPTH | MAX DUMP HEIGHT | DIMENSIONS (LWH)              | WEIGHT    | CAT CLASS |
|--------|-------|---------------|-----------------|--------------|---------------|-----------------|-------------------------------|-----------|-----------|
| Kubota | K008  | 1,040 lb      | 10.3 hp, Diesel | Conventional | 5 ft 8 in     | 6 ft 8 in       | 108 in / 28 in / 87 in        | 2,190 lb  | 240-1000  |
| Bobcat | E10   | 527 lb        | 10.2 hp, Diesel | Zero         | 6 ft          | 6 ft            | 110 in / 28 in / 87 in        | 2,593 lb  | 240-1000  |
| Bobcat | E26   | 1,999 lb      | 24.8 hp, Diesel | Zero         | 8.5 ft        | 9.9 ft          | 170.4 in / 59.6 in / 94.9 in  | 5,666 lb  | 240-1300  |
| Bobcat | E35I  | 2,866 lb      | 24.8 hp, Diesel | Zero         | 10.2 ft       | 11 ft           | 189.7 in / 69 in / 95.6 in    | 7,468 lb  | 240-1400  |
| Kubota | U35   | 3,330 lb      | 24.8 hp, Diesel | Minimal      | 9 ft 9 in     | 11 ft 1 in      | 187 in / 67 in / 97 in        | 8,488 lb  | 240-1410  |
| Bobcat | E50   | 6,034 lb      | 49.8 hp, Diesel | Conventional | 11.6 ft       | 12.7 ft         | 218 in / 77.2 in / 99.7 in    | 10,677 lb | 240-1500  |
| Kubota | U55   | 4,070 lb      | 45 hp, Diesel   | Minimal      | 11.8 ft       | 13.2 ft         | 216 in / 78 in / 100 in       | 12,335 lb | 240-1500  |
| Bobcat | E85   | 9,327 lb      | 59.4 hp, Diesel | Minimal      | 15.5 ft       | 16.5 ft         | 246 in / 91 in / 104 in       | 18,960 lb | 240-1710  |
| Volvo  | ECR58 | 7,540 lb      | 48 hp, Diesel   | Reduced      | 12 ft 10 in   | 13 ft 8 in      | 17 ft / 6 ft 7 in / 8 ft 4 in | 12,963 lb | 240-1500  |
| Kubota | KX080 | 7,200 lb      | 62 hp, Diesel   | Minimal      | 15.1 ft       | 17.2 ft         | 254 in / 86 in / 100 in       | 19,225 lb | 240-1710  |



## MEDIUM RANGE EXCAVATORS

Dig depths up to nearly 15 feet and max dump heights of more than 17 feet.

### Features and applications include:

- Reduced tail swing for access to tight spaces
- Ergonomically designed cab
- Ideal for road construction, utility work, landscaping and various municipal projects

**UP TO 8,570 LB**  
LIFT CAPACITY  
**VOLVO**



| MAKE  | MODEL  | LIFT CAPACITY | HORSE POWER     | TAIL SWING   | MAX DIG DEPTH | MAX DUMP HEIGHT | DIMENSIONS (LWH)        | WEIGHT    | MAX SPEED | CAT CLASS |
|-------|--------|---------------|-----------------|--------------|---------------|-----------------|-------------------------|-----------|-----------|-----------|
| Volvo | EW60E  | 3,130 lb      | 63.4 hp, Diesel | Conventional | 10 ft 10 in   | 14 ft 7 in      | 231 in / 76 in / 112 in | 12,970 lb | 18.6 mph  | 240-1620  |
| Volvo | ECR88D | 8,570 lb      | 58 hp, Diesel   | Minimal      | 14 ft 10 in   | 17 ft 2 in      | 253 in / 91 in / 107 in | 19,600 lb | 3.0 mph   | 240-1710  |

## EXCAVATORS

The spacious cab features an ergonomic interior allowing the operator to remain comfortable while performing complex tasks easily.

### Features and applications include:

- Superb operator visibility
- Climate-controlled cab, AM/FM radio
- Joystick controls
- Ideal for trench digging, material handling, forestry work, construction, demolition, landscaping, mining, river dredging, snow removal, driving piles

**UP TO 86,500 LB**  
WEIGHT



| MAKE  | MODEL    | STICK ARM LENGTH | HORSE POWER | MAX DUMP HEIGHT | MAX DIG DEPTH | MAX REACH   | TRAVEL SPEED | TAIL SWING   | DIMENSIONS (LWH)                      | WEIGHT    | CAT CLASS |
|-------|----------|------------------|-------------|-----------------|---------------|-------------|--------------|--------------|---------------------------------------|-----------|-----------|
| Volvo | EC140EL  | 9 ft 10 in       | 89 hp       | 19 ft 6 in      | 18 ft 3 in    | 27 ft       | 3.4 mph      | Conventional | 25.4 in / 8 ft 6 in / 9 ft 2 in       | 33,700 lb | 240-2000  |
| Volvo | ECR145EL | 8 ft 2 in        | 89 hp       | 22 ft 7 in      | 18 ft 2 in    | 26 ft 11 in | 3.4 mph      | Reduced      | 24 ft 4 in / 8 ft 10 in / 9 ft 6 in   | 36,990 lb | 240-2020  |
| Volvo | EC160EL  | 9 ft 10 in       | 109 hp      | 20 ft 8 in      | 19 ft 11 in   | 28 ft 11 in | 3.5 mph      | Conventional | 28 ft 9 in / 8 ft 9 in / 9 ft 5 in    | 42,390 lb | 240-2100  |
| Volvo | EC200EL  | 9 ft 6 in        | 154 hp      | 21 ft 8 in      | 22 ft 3 in    | 32 ft 9 in  | 3.5 mph      | Conventional | 31 ft 9 in / 9 ft 10 in / 9 ft 7 in   | 50,995 lb | 240-2200  |
| Volvo | EC220EL  | 9 ft 6 in        | 128 hp      | 21 ft 10 in     | 22 ft 1 in    | 32 ft 1 in  | 3.5 mph      | Conventional | 31 ft 10 in / 10 ft 6 in / 9 ft 8 in  | 51,365 lb | 240-2200  |
| Volvo | ECR235EL | 9 ft 6 in        | 128 hp      | 25 ft 10 in     | 22 ft 2 in    | 31 ft 11 in | 3.4 mph      | Reduced      | 29 ft 7 in / 10 ft 2 in / 9 ft 9 in   | 57,720 lb | 240-2320  |
| Volvo | EC300EL  | 10 ft            | 179 hp      | 23 ft 1 in      | 24 ft 1 in    | 34 ft 6 in  | 3.4 mph      | Conventional | 34 ft 6 in / 11 ft 2 in / 10 ft 2 in  | 72,260 lb | 240-2400  |
| Volvo | EC350EL  | 10 ft 6 in       | 225 hp      | 23 ft 5 in      | 24 ft 11 in   | 36 ft 2 in  | 3.3 mph      | Conventional | 36 ft 10 in / 11 ft 2 in / 10 ft 7 in | 86,500 lb | 240-2500  |
| Volvo | ECR355E  | 10 ft            | 240 hp      | 25 ft 9 in      | 22 ft 10 in   | 34 ft 3 in  | 2.8 mph      | Reduced      | 32 ft 5 in / 11 ft 9 in / 10 ft 6 in  | 82,057 lb | 240-2510  |

## LANDSCAPE TRACTORS

Provide high torque at low speeds for purposes of plowing, cultivating, tilling or hauling.

**UP TO 2,154 LB** **Kubota**  
LIFT CAPACITY



| MAKE   | MODEL    | TRANSMISSION             | ENGINE          | DIG DEPTH | OPERATING WEIGHT | LIFT CAPACITY AT PIVOT | DIMENSIONS (LWH)             | CAT CLASS |
|--------|----------|--------------------------|-----------------|-----------|------------------|------------------------|------------------------------|-----------|
| Kubota | B26T1b   | HST Transmission 2WD/4WD | 24.3 hp, Diesel | 8 ft 4 in | 4,001 lb         | 1,301 lb               | 201.9 in / 53.7 in / 89.1 in | 210-1200  |
| Kubota | L4701HST | HST Transmission 2WD/4WD | 47.3 hp, Diesel | 9 ft 2 in | 3,307 lb         | 2,154 lb               | 119.5 in / 62.4 in / 91.7 in | 275-1160  |

## BACKHOE LOADERS

Dig deep or scoop up dirt, debris and more. Deliver powerful and precise performance on any surface.

### Features and applications include:

- High ground clearance
- Outriggers for additional stability
- Roomy cabin for operator comfort, simple controls
- Excellent for agricultural, road, and construction projects and more

**UP TO 4,600 LB**  
BACKHOE LIFT CAPACITY

**UP TO 6,967 LB**  
LOADER LIFT CAPACITY

 **JOHN DEERE**



| MAKE       | MODEL           | HORSE POWER | LIFT CAPACITY                         | TRAVEL SPEED | MAX DIG DEPTH                                     | REACH   | DIMENSIONS (LWH)                     | WEIGHT    | CAT CLASS |
|------------|-----------------|-------------|---------------------------------------|--------------|---|---|--------------------------------------|-----------|-----------|
| John Deere | 310LEP ROPS     | 69 hp       | Loader: 6,600 lb<br>Backhoe: 3,400 lb | 22.6 mph     | 14 ft 1 in  | 17 ft 9 in                                    | 23 ft 9 in / 7 ft 3 in / 11 ft 1 in  | 14,500 lb | 210-3200  |
| John Deere | 310LEP CAB      | 69 hp       | Loader: 6,600 lb<br>Backhoe: 3,400 lb | 22.6 mph     | 14 ft 1 in  | 17 ft 9 in                                    | 23 ft 9 in / 7 ft 3 in / 11 ft 1 in  | 15,000 lb | 210-3250  |
| John Deere | 310LEP ROPS EXT | 69 hp       | Loader: 6,600 lb<br>Backhoe: 3,004 lb | 22.6 mph     | Retracted: 14 ft 4 in<br>Ext. Dipper: 17 ft 10 in | Retracted: 18 ft 0 in<br>Extended: 21 ft 4 in | 23 ft 9 in / 7 ft 3 in / 11 ft 1 in  | 14,900 lb | 210-3205  |
| John Deere | 310LEP CAB EXT  | 69 hp       | Loader: 6,600 lb<br>Backhoe: 3,004 lb | 22.6 mph     | Retracted: 14 ft 4 in<br>Ext. Dipper: 17 ft 10 in | Retracted: 18 ft 0 in<br>Extended: 21 ft 4 in | 23 ft 9 in / 7 ft 3 in / 11 ft 1 in  | 15,500 lb | 210-3255  |
| John Deere | 410L CAB EXT    | 113 hp      | Loader: 6,967 lb<br>Backhoe: 4,600 lb | 24.9 mph     | Retracted: 15 ft 11 in<br>Ext. Dipper 19 ft 7 in  | Retracted: 19 ft 9 in<br>Extended: 23 ft 5 in | 24 ft 5 in / 7 ft 8 in / 12 ft 10 in | 19,800 lb | 210-4255  |

## DOZERS

Providing exceptional reliability, power and torque, a low center of gravity, high ground clearance and a cab-forward design that allows for unrivaled operator visibility.

### Features and applications include:

- Ergonomic and easy-to-use controls
- Large fuel tanks to allow for increased time on the job site
- Ideal for construction and utility work

**80-104 HP**  
**9-10 FT**  
BLADE WIDTH

 **JOHN DEERE**



| MAKE       | MODEL | ENGINE     | BLADE WIDTH | HORSE POWER | TRAVEL SPEED | DIMENSIONS (LWH)                   | WEIGHT    | CAT CLASS |
|------------|-------|------------|-------------|-------------|--------------|------------------------------------|-----------|-----------|
| John Deere | 450K  | Deere 4.5L | 9 ft 7 in   | 80          | 5 mph        | 13 ft 2 in / 9 ft 7 in / 9 ft 2 in | 18,550 lb | 250-1140  |
| John Deere | 650K  | Deere 6.8L | 10 ft 4 in  | 104         | 5 mph        | 14 ft / 10 ft 4 in / 9 ft 2 in     | 22,150 lb | 250-1340  |

## WHEEL LOADERS

Whether you're moving dirt, rock, landscaping debris or snow.

### Features and applications include:

- All-weather cab provides high-visibility, operator comfort and low noise
- Ideal for construction, landscaping, agricultural, forestry, mining and waste management applications

**UP TO 35,040 LB**  
TIPPING CAPACITY  
**VOLVO**








| MAKE  | MODEL | TRANSMISSION | HORSE POWER | MAX DUMP HEIGHT | TIPPING CAPACITY STRAIGHT/FULL TURN | BREAKOUT FORCE | TRAVEL SPEED | DIMENSIONS (LWH)                    | WEIGHT    | CAT CLASS |
|-------|-------|--------------|-------------|-----------------|-------------------------------------|----------------|--------------|-------------------------------------|-----------|-----------|
| Volvo | L70H  | Powershift   | 122 hp      | 110 ft          | 21,320 lb / 18,380 lb               | 19,690 lb      | 27.5 mph     | 24 ft 7 in / 8 ft 1 in / 10 ft 9 in | 31,400 lb | 265-1310  |
| Volvo | L90H  | Powershift   | 137 hp      | 9 ft 6 in       | 26,390 lb / 22,590 lb               | 31,510 lb      | 27.5 mph     | 24 ft 9 in / 8 ft 2 in / 10 ft 9 in | 34,760 lb | 265-1410  |
| Volvo | L110H | Powershift   | 190 hp      | 9 ft 4 in       | 35,040 lb / 30,160 lb               | 40,900 lb      | 24.9 mph     | 26 ft 4 in / 8 ft 9 in / 11 ft 1 in | 44,580 lb | 265-1510  |

# HYDRAULIC BREAKERS



| MAKE | MODEL          | FT POUND CLASS | HYDRAULIC FLOW (GPM) | BLOWS PER MINUTE | DIMENSIONS (LWH)       | WEIGHT   | CAT CLASS |
|------|----------------|----------------|----------------------|------------------|------------------------|----------|-----------|
| Kent | Fx25a FB-Dingo | 275 ft lb      | 4.75 - 9.25          | 600 - 1500       | 47 in / 24 in / 12 in  | 273 lb   | 290-1025  |
| Kent | Fx25a FSP      | 275 ft lb      | 4.75 - 9.25          | 600 - 1500       | 47 in / 24 in / 12 in  | 273 lb   | 290-5150  |
| Kent | Fx25a FB-SS    | 275 ft lb      | 4.75 - 9.25          | 600 - 1500       | 47 in / 24 in / 12 in  | 273 lb   | 290-2210  |
| Kent | Fx45a SS       | 550 ft lb      | 7.90 - 15.80         | 600 - 1100       | 57 in / 46 in / 24 in  | 840 lb   | 290-2225  |
| Kent | Fx45a CP       | 550 ft lb      | 7.90 - 15.81         | 600 - 1100       | 57 in / 46 in / 14 in  | 435 lb   | 290-5160  |
| Kent | Fx45a CP-QA    | 550 ft lb      | 7.90 - 15.9          | 600 - 1100       | 59 in / 46 in / 24 in  | 790 lb   | 290-2230  |
| Kent | F9 FSP         | 1,500 ft lb    | 17.00 - 30.00        | 550 - 900        | 76 in / 18 in / 20 in  | 1,121 lb | 290-6700  |
| Kent | Fx125 Qtv      | 2,000 ft lb    | 18.50 - 31.50        | 400 - 650        | 92 in / 21 in / 24 in  | 1,820 lb | 290-6705  |
| Kent | Fx275          | 5,250 ft lb    | 38 - 58              | 350 - 550        | 110 in / 29 in / 20 in | 3,758 lb | 290-6715  |
| Kent | Fx475          | 8,500 ft lb    | 53 - 79              | 250 - 350        | 132 in / 33 in / 25 in | 7,021 lb | 290-6720  |

## HYDRAULIC BREAKER COMPATIBILITY GUIDE

|  | Equipment Make | Equipment Model   | Equipment Cat Class | Breaker Model | Breaker Cat Class |
|--|----------------|-------------------|---------------------|---------------|-------------------|
|  SKID-STEERS          | Bobcat         | S70               | 200-1310 / 200-1311 | Fx35a         | 290-2220          |
|  | Bobcat         | S450              | 200-1350 / 200-1351 | Fx45a         | 290-2230          |
|  | Bobcat         | S570              | 200-1350 / 200-1351 | Fx45a         | 290-2230          |
|  | Kubota         | SSV65             | 200-1350 / 200-1351 | Fx45a         | 290-2230          |
|  | Bobcat         | S650              | 200-1370 / 200-1371 | Fx45a         | 290-2230          |
|  | Kubota         | SSV75             | 200-1370 / 200-1371 | Fx45a         | 290-2230          |
|  TRACK LOADERS      | Bobcat         | T450              | 200-1430 / 200-1431 | Fx45a         | 290-2230          |
|  | Bobcat         | T590              | 200-1450 / 200-1451 | Fx45a         | 290-2230          |
|  | Kubota         | SVL65             | 200-1450 / 200-1451 | Fx45a         | 290-2230          |
|  | Kubota         | SVL75             | 200-1450 / 200-1451 | Fx45a         | 290-2230          |
|  | Bobcat         | T650              | 200-1460 / 200-1461 | Fx45a         | 290-2230          |
|  | Kubota         | SVL95             | 200-1470 / 200-1471 | Fx45a         | 290-2230          |
|  COMPACT EXCAVATORS | Bobcat         | E10               | 240-1000            | Fx25a         | 290-5150          |
|  | Kubota         | K008              | 240-1000            | Fx25a         | 290-5150          |
|  | Bobcat         | E26               | 240-1300 / 240-1310 | Fx45a         | 290-5160          |
|  | Bobcat         | E35               | 240-1400 / 240-1410 | Fx45a         | 290-5160          |
|  | Kubota         | U35               | 240-1400 / 240-1410 | Fx45a         | 290-5160          |
|  | Kubota         | U55               | 240-1500 / 240-1510 | Fx45a         | 290-5160          |
|  | Bobcat         | E50               | 240-1500 / 240-1510 | Fx45a         | 290-5160          |
|  | Kubota         | KX080             | 240-1700 / 240-1710 | F9            | 290-6700          |
|  | Volvo          | ECR88             | 240-1710            | F9            | 290-6700          |
|  EXCAVATORS         | Volvo          | EC140             | 240-2000 / 240-2020 | Fx175         | 290-6710          |
|  | Volvo          | ECR145            | 240-2020 / 240-2030 | Fx175         | 290-6710          |
|  | Volvo          | EC160             | 240-2100            | Fx175         | 290-6710          |
|  | Volvo          | EC200             | 240-2200 / 240-2210 | Fx275         | 290-6715          |
|  | Volvo          | ECR235            | 240-2320            | Fx275         | 290-6715          |
|  | Volvo          | EC350             | 240-2500            | Fx475         | 290-6720          |
|  BACKHOES           | Deere          | 310LEP            | 210-3200 / 210-3250 | F9            | 290-6700          |
|  | Deere          | 310LEP Extendahoe | 210-3205 / 210-3255 | F9            | 290-6700          |
|  | Deere          | 410LEP Extendahoe | 210-4205 / 210-4255 | F9            | 290-6700          |
|  | Deere          | 710LEP            | 210-5250            | Fx125         | 290-6705          |
|  | Deere          | 710LEP Extendahoe | 210-5255            | Fx125         | 290-6705          |



## EARTH MOVING ATTACHMENTS



### AUGERS

Greater torque breaks down rock, tree roots, and frozen ground.



### BROOMS

Quick removal jobs without damaging pavement.



### SWEEPERS

Scoop, collect, and dump debris with one attachment.



### BREAKERS

Site preparation and foundation removal.



### TRENCHERS

Side-shift feature allows closer trenching to buildings.



### RAKES

Smooth soil and collect debris as small as 1/2 in.



### CUTTERS

Cuts brush and mulches small branches up to 3 in. in diameter.



### PLANERS

Increase performance and efficiency with a high-flow planer.



### FORKS

Quick connect forks from the operator's seat and reduce the need to exit cab.



### GRAPPLES

Delivers easy handling of hard-to-manage materials.



### SNOW PUSHERS

Free-floating blade contours with ground and collects more snow.

| MAKE     | MODEL        | TYPE                              | EQUIPMENT  | CAT CLASS |
|----------|--------------|-----------------------------------|--|-----------|
| McMillen | 24861        | 2 in Hex auger drive              | Mini Skidsteer                                   | 290-1000  |
| Bobcat   | 6809442-15C  | Auger                             | Skidsteer-Compact Track Loader-Compact Excavator | 290-2000  |
| Bobcat   | 6905805      | 68 in Angle broom                 | Skidsteer-Compact Track Loader                   | 290-2010  |
| Bobcat   | 6707144      | 60 in Sweeper pick-up broom       | Skidsteer-Compact Track Loader                   | 290-2015  |
| Bobcat   | 7113767      | 94 in Snow pusher                 | Skidsteer-Compact Track Loader                   | 290-2020  |
| Bobcat   | 7168340      | 68 in Grapple                     | Skidsteer-Compact Track Loader                   | 290-2510  |
| Bradco   | 117765       | 48 in Trencher                    | Skidsteer-Compact Track Loader                   | 290-2030  |
| Bobcat   | 6710630      | 72 in Power rake                  | Skidsteer-Compact Track Loader                   | 290-2050  |
| Bradco   | 30372A-0022  | 72 in Standard flow rotary cutter | Skidsteer-Compact Track Loader                   | 290-2060  |
| Bobcat   | 7233002      | 72 in High flow rotary cutter     | Skidsteer-Compact Track Loader                   | 290-2063  |
| Bobcat   | M7019        | 14 in Standard flow planer        | Skidsteer-Compact Track Loader                   | 290-2070  |
| Bobcat   | M7017        | 24 in High flow planer            | Skidsteer-Compact Track Loader                   | 290-2075  |
| Bobcat   | 6540182      | 48 in Forks                       | Skidsteer-Compact Track Loader                   | 290-2145  |
| FRD      | FX45ACP-QA   | 550 lb Breaker                    | Skidsteer-Mini Ex-Rubber Tire Backhoe            | 290-2230  |
| McMillen | 122712-x1975 | 2 in Hex Auger drive              | Mini Excavator                                   | 290-5000  |

## VACUUM TRAILERS

Designed to handle a broad range of underground construction, excavation and cleanup.

### Features and applications include:

- Hydraulically controlled, dual-cylinder tank dumping system provides stability when dumping
- Ideal for pot holing utilities, water valve clean out, underground utility and storm drain clean out, exposing buried utility lines, water leak repair, commercial and residential debris cleanup, posthole digging and more

**UP TO 4 GPM**  
**HIGH PRESSURE WATER SYSTEM**  
**500 GAL**  
**VACUUM TANK CAPACITY**  
**Ditch Witch**



| MAKE        | MODEL     | ENGINE         | VACUUM TANK CAPACITY | VACUUM AIR FLOW | WATER TANK CAPACITY | MAX GPM | MAX PSI | DIMENSIONS (LWH)       | DRY WEIGHT | WET WEIGHT | CAT CLASS |
|-------------|-----------|----------------|----------------------|-----------------|---------------------|---------|---------|------------------------|------------|------------|-----------|
| Ditch Witch | FX25      | 31 hp Gas      | 500 gal              | 543 cfm         | 80 gal              | 4       | 3,000   | 200 in / 96 in / 86 in | 5,600 lb   | 9,500 lb   | 610-2455  |
| Ditch Witch | FX30/HX30 | 24.8 hp Diesel | 500 gal              | 512 cfm         | 80 gal              | 4.2     | 3,000   | 232 in / 96 in / 86 in | 6,853 lb   | 12,495 lb  | 610-2460  |
| Vermeer     | CV573SGT  | 38 hp Gas      | 500 gal              | 1000 cfm        | 200 gal             | 4       | 3,000   | 228 in / 93 in / 89 in | 4,850 lb   | 9,995 lb   | 610-2455  |
| Vermeer     | LP573XDT  | 24 hp Diesel   | 500 gal              | 580 cfm         | 200 gal             | 4       | 3,000   | 236 in / 93 in / 90 in | 6,190 lb   | 12,000 lb  | 610-2460  |

## DEMOLITION ROBOTS



When your demolition job involves hazardous working conditions, you may want to send in a robot to get the job done.

### Features and applications include:

- Low weight and compact footprint to fit into tight spaces
- Long reach for getting into confined areas
- Outriggers to provide stability
- Ideal for breaking down walls, hard surfaces and more

**12-17 FT**  
**REACH**  
**Husqvarna**



| MAKE      | MODEL   | POWER TYPE        | GENERATOR REQUIRED          | SHORE POWER REQUIRED | REACH                         | WEIGHT  | DIMENSIONS (LWH)   | CAT CLASS |
|-----------|---------|-------------------|-----------------------------|----------------------|-------------------------------|---------|--|-----------|
| Husqvarna | DXR 140 | Electric 480V 3PH | 45 in kW (56 kva), 480V 3PH | 480V 3PH 40A         | 14 ft (Up)<br>12 ft (Forward) | 2132 lb | 76 in / 30 in / 48 in (Down)<br>76 in / 30 in / 55 in (Up)   | 230-1000  |
| Husqvarna | DXR 300 | Electric 480V 3PH | 45 in kW (56 kva), 480V 3PH | 480V 3PH 40A         | 17 ft (Up)<br>16 ft (Forward) | 4321 lb | 111 in / 31 in / 54 in (Down)<br>111 in / 31 in / 61 in (Up) | 230-1100  |

## DEMOLITION ROBOT ATTACHMENTS



**BREAKER**



**GRAPPLE**



**CRUSHER**



**BUCKET**

| MODEL / TYPE      | ATTACH TO | WEIGHT | DIMENSIONS               | CAT CLASS |
|-------------------|-----------|--------|--------------------------|-----------|
| SB 152 / Breaker  | DXR 140   | 326 lb | 31 in / 14 in / 12 in    | 230-1200  |
| SB 202 / Breaker  | DXR 300   | 441 lb | 31 in / 16 in / 14 in    | 230-1210  |
| SB 302 / Breaker  | DXR 300   | 659 lb | 31 in / 18 in / 16 in    | 230-1210  |
| MG 100 / Grapple  | DXR 140   | 220 lb | 31 in / 18 in / 22 in    | 230-1300  |
| MG 200 / Grapple  | DXR 300   | 373 lb | 31 in / 18 in / 24 in    | 230-1310  |
| DCR 140 / Crusher | DXR 140   | 250 lb | 31 in / 28.75 in / 13 in | 230-1400  |
| DCR 300 / Crusher | DXR 300   | 390 lb | 31 in / 34.5 in / 13 in  | 230-1410  |

| MODEL / TYPE                            | ATTACH TO   | WEIGHT | DIMENSIONS              | CAT CLASS |
|---|-------------|--------|-------------------------|-----------|
| DSS 200 / Shear                         | DXR 140/300 | 408 lb | 31 in / 13 in / 17.1 in | 230-1500  |
| DXR 140 / 12 in clean out bucket        | DXR 140     | 110 lb | 31 in / 12 in / 20 in   | 230-1600  |
| DXR 300 / 12 in clean out bucket        | DXR 300     | 110 lb | 31 in / 12 in / 20 in   | 230-1610  |
| DXR 140 / 20 in standard digging bucket | DXR 140     | 150 lb | 31 in / 20 in / 20 in   | 230-1620  |
| DXR 300 / 20 in standard digging bucket | DXR 300     | 150 lb | 31 in / 20 in / 20 in   | 230-1630  |
| DXR 140 / 30 in clean out bucket        | DXR 140     | 180 lb | 31 in / 30 in / 20 in   | 230-1640  |
| DXR 300 / 30 in clean out bucket        | DXR 300     | 180 lb | 31 in / 30 in / 20 in   | 230-1650  |



**DUST SUPPRESSION FOG CANNON**



Provides real-time view of the inside of concrete structures and generates accurate images automatically for direct on-site evaluation.

**50-230 FT**  
MIST DISTANCE

**4-25 GPM**  
WATER FLOW



| MAKE  | MODEL   | TYPE                                    | THROW  | WATER FLOW | POWER        | DIMENSIONS (LWH)      | WEIGHT   | CAT-CLASS |
|-------|---------|---|--------|------------|--------------|-----------------------|----------|-----------|
| FOGCO | LD 50   | Cart mounted dust suppression mister    | 50 ft  | .8-2.5 gpm | 240V 1PH 7A  | 32 in / 22 in / 37 in | 127 lb   | 700-2010  |
| FOGCO | LD 130  | Trolley mounted dust suppression mister | 130 ft | 8 gpm      | 480V 3PH 21A | 71 in / 59 in / 79 in | 530 lb   | 700-2020  |
| FOGCO | HD 230T | Trolley mounted dust suppression mister | 230 ft | 4-25 gpm   | 480V 3PH 32A | 98 in / 75 in / 88 in | 1,125 lb | 700-2050  |



**We'll give you the tools...  
you provide the talent**

Learn more at [careers.hercrentals.com](https://careers.hercrentals.com)







# TOOLS

**Electric Tools**

Circular Saws  
Miter Saws  
Reciprocating Saws  
Portable Band Saws  
Table Saws  
Drills

**Mechanical Trades**

Drill Presses  
Drywall Sanders  
Pipe Cleaners  
Sewer Viewers  
Pipe Locators  
Pipe Tools  
Cable Pulling  
Conduit Benders

**Sheaves**

Rollers  
Flange Spreaders  
Hydraulic Torquing Tools  
Pneumatic Torquing Tools  
Plasma Cutters  
Welders  
Ladders  
Pressure Washers

## CIRCULAR SAWS


Designed to rip through large beams like railroad ties, timber and pressure-treated lumber with ease.

### Features and applications include:

- Low noise level (87 db)
- Large support handle for increased operator comfort and control
- Top-accessible spindle lock enables easier and faster blade changing
- Blade stabilizer for consistent rotation and superior performance

**16¼ IN**  
BLADE SIZE

**Makita**

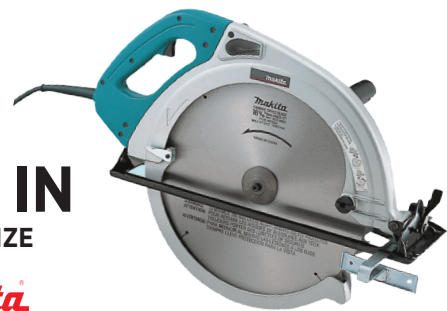

| MAKE   | MODEL  | TYPE         | BLADE     | 45° MITER CUT CAPACITY | 90° CROSS-CUT CAPACITY | SPEED     | AMP RATING | WEIGHT  | CAT CLASS |
|--------|--------|--------------|-----------|------------------------|------------------------|-----------|------------|---------|-----------|
| Makita | 5402NA | Circular saw | 16-1/4 in | 4-3/16 in              | 6-3/16 in              | 2,300 rpm | 15A        | 43.5 lb | 100-6530  |

## MITER SAWS

Make clean, accurate cuts at all angles with this 12-inch double bevel compound miter saw. Powered by a 15 amp motor that delivers 3,600 rpm.

### Features and applications include:

- Adjustment-free cut line indication
- Dust collection captures over 75% of dust
- 2x16 dimensional lumber at 90° and 2x12 at 45°
- Oversized bevel scale makes bevel angle adjustments accurate and easy

**12 IN**  
BLADE SIZE

**DEWALT**



| MAKE   | MODEL  | TYPE                       | BLADE | 45° MITER CUT CAPACITY | 90° CROSS-CUT CAPACITY | SPEED     | AMP RATING | WEIGHT | CAT CLASS |
|--------|--------|----------------------------|-------|------------------------|------------------------|-----------|------------|--------|-----------|
| Dewalt | DWS780 | Sliding compound miter saw | 12 in | 8 in                   | 14 in                  | 3,800 rpm | 15A        | 56 lb  | 100-6620  |

## PORTABLE TABLE SAWS

Portable table saw with a steel roll cage delivers powerful rip cutting performance. With a motor reaching up to 3,850 rpm.

### Features and applications include:

- Adjustable rear feet designed to level the saw on uneven work surfaces
- Rack and pinion fence stays parallel to the blade for accuracy
- Dust port allows for 2-1/2 inch vacuum hook up and minimizes cleanup
- Maximum cut depth of 2-1/4 inches at 45° and 3-1/8 inches at 90° for a variety of useful cuts

**10 IN**  
BLADE SIZE

**DEWALT**



| MAKE   | MODEL | TYPE              | BLADE | 45° MITER CUT CAPACITY | 90° CROSS-CUT CAPACITY | SPEED     | AMP RATING | WEIGHT | CAT CLASS |
|--------|-------|-------------------|-------|------------------------|------------------------|-----------|------------|--------|-----------|
| Dewalt | DW745 | Compact table saw | 10 in | 2-1/4 in               | 3-1/8 in               | 3,850 rpm | 15A        | 45 lb  | 100-6650  |

## RECIPROCATING SAWS

When you need to separate walls from adjoining floors, open up doorways in renovation or demolition projects or slice through nails and plumbing pipe, this is the saw for you.

### Features and applications include:

- Easily adjusts depth of cut
- Keyless stainless steel blade clamp for quick and easy blade changes and increased reliability
- Variable speed trigger allows user to instantly control speed

**1 1/8 IN**  
BLADE SIZE

**DEWALT**



| MAKE   | MODEL  | BLADE    | SPEED     | AMP RATING | WEIGHT | CAT CLASS |
|--------|--------|----------|-----------|------------|--------|-----------|
| Dewalt | DW311K | 1-1/8 in | 2,700 rpm | 13A        | 9 lb   | 100-6570  |

## PORTABLE BAND SAWS

Ideal for professionals and occasional users alike. Less noisy and messy than a chop saw, this band saw cuts through quarter-inch steel like it's plywood.

### Features and applications include:

- LED sight light allows the user to see cut line in dark jobsite environment
- Variable speed dial allows operator to adjust speed for specific materials and applications
- Ideal for cutting through wood, aluminum, stainless steel, copper, bronze and more

**4 7/8 IN**  
BLADE SIZE

**DEWALT**



| MAKE   | MODEL   | TYPE              | BLADE    | MAX CAPACITY (ROUND) | MAX CAPACITY (RECTANGULAR) | SPEED       | AMP RATING | WEIGHT | CAT CLASS |
|--------|---------|-------------------|----------|----------------------|----------------------------|-------------|------------|--------|-----------|
| Dewalt | DWM120K | Deep cut band saw | 4 7/8 in | 5 in                 | 5 / 4-3/4 in               | 100-350 rpm | 10A        | 15 lb  | 100-6710  |

## STATIONARY CHOP SAWS

This chop saw features Quick-Change™ keyless wheel changes and its Quick-Lock Vise™ lets you secure materials fast while its powerful 15 amp motor easily slices through tough cuts.

### Features and applications include:

- 5.5 horsepower motor delivers high performance without overheating
- Versatile 45-degree pivoting fence for accurate angle cuts
- Handle rounds measuring 5 inches across or rectangular materials as large as 4-1/2 X 6-1/2 inches
- Ergonomically designed "D" handle provides more comfortable hand position, reducing fatigue and increasing productivity

**14 IN**  
BLADE SIZE

**DEWALT**



| MAKE   | MODEL  | TYPE     | BLADE | MAX CAPACITY (ROUND) | MAX CAPACITY (RECTANGULAR) | SPEED     | AMP RATING | WEIGHT | CAT CLASS |
|--------|--------|----------|-------|----------------------|----------------------------|-----------|------------|--------|-----------|
| Dewalt | D28715 | Chop saw | 14 in | 5 in                 | 4-1/2 / 6-1/2 in           | 4,000 rpm | 15A        | 39 lb  | 100-6640  |



## RIGHT ANGLE DRILLS

Designed for greater operator leverage and control, with triple gear reduction controlling the 300/1,200 rpm motor.

### Features and applications include:

- Weighs 16 pounds
- Mechanical-slip clutch in low gear to provide control of reactionary torque
- Adjustable front handle and 2-position side handle provide maximum leverage and control

**1/2 IN**  
CHUCK SIZE  
**DEWALT**



| MAKE   | MODEL  | TYPE              | CHUCK SIZE | SPEED RANGE   | AMP RATING | WEIGHT | CAT CLASS |
|--------|--------|-------------------|------------|---------------|------------|--------|-----------|
| Dewalt | DW124k | Right angle drill | 1/2 in     | 300-1,200 rpm | 11.5A      | 14 lb  | 100-6000  |

## HORIZONTAL DRILLS

Ideal for drilling, concrete and mud mixing.

### Features and applications include:

- 120-volt motor delivers up to 550 rpm to increase torque for drilling and mud mixing
- Lightweight and soft grip handle minimizes operator fatigue
- 2-position rear and 3-position side handles for optimal control and comfort

**1/2 IN**  
CHUCK SIZE  
**DEWALT**



| MAKE   | MODEL  | TYPE         | CHUCK SIZE | SPEED RANGE | AMP RATING | WEIGHT | CAT CLASS |
|--------|--------|--------------|------------|-------------|------------|--------|-----------|
| Dewalt | DW130V | 1/2 in drill | 1/2 in     | 0-550 rpm   | 9A         | 7.5 lb | 100-1550  |

## IMPACT WRENCHES

Delivers a powerful forward and reverse torque.

### Features and applications include:

- Compact and light to fit in tight spaces
- Ergonomic grip

**1/2-3/4 IN**  
CHUCK SIZE  
**DEWALT**



| MAKE   | MODEL | DRIVE  | MAX TORQUE | AMP RATING | WEIGHT | CAT CLASS |
|--------|-------|--------|------------|------------|--------|-----------|
| Dewalt | DW292 | 1/2 in | 345 ft lb  | 7A         | 7 lb   | 130-1670  |
| Dewalt | DW297 | 3/4 in | 434 ft lb  | 7.5A       | 11 lb  | 130-1680  |

## DRYWALL SANDERS

Make drywall sanding a cinch with this 9-pound, long-reach ceiling and wall sander.

### Features and applications include:

- Drywall sander with vacuum extension
- Suction hoods with brush ring



| MAKE | MODEL | SPEED           | POWER | LENGTH | WEIGHT | POWER CABLE | CAT CLASS |
|------|-------|-----------------|-------|--------|--------|-------------|-----------|
| Flex | GE5   | 1,100-1,650 rpm | 4.2A  | 60 in  | 8.9 lb | 39 in       | 100-5060  |

## DRILL PRESSES

Ideal for drilling and tapping structural steel and most metals, these heavy-duty drills are easy to use and capable of drilling into any ferrous material a half-inch and thicker.

### Features and applications include:

- Includes motor and fixed position, variable speed base
- Solid state electronic switching - 9-inch drill travel

**3/4-3 IN** *Milwaukee*  
DRILL CAPACITY



| MAKE      | MODEL    | DRILL CAPACITY  | SPEED   | POWER      | WEIGHT  | CAT CLASS |
|-----------|----------|-----------------|---------|------------|---------|-----------|
| Milwaukee | 4210-1   | 3/4 in          | 350 rpm | 120V 12.5A | 62 lb   | 130-1220  |
| Dewalt    | DWE1622K | 1 5/8 in - 2 in | 450 rpm | 110V       | 47.6 lb | 130-1250  |
| CS Unitec | ECO80AK  | 3 in            | 4-speed | 110V       | 57 lb   | 130-1260  |

## PIPE CLEANERS AND SEWER VIEWERS

Find the source of any pipe obstruction — and blast through it.

### Features and applications include:

- Rugged frame and reel, drag brake and reel lock
- Operate vertically or horizontally
- 8-inch wheels

**1 1/4-10 IN**  
LINE CAPACITY

*General*  
PIPE CLEANERS



| MAKE    | MODEL     | TYPE         | LINE CAPACITY | CABLE/HOSE LENGTH                 | MOTOR             | WEIGHT | CAMERA/MONITOR        | CAT CLASS |
|---------|-----------|--------------|---------------|-----------------------------------|-------------------|--------|-----------------------|-----------|
| General | R-SV-D-WC | Pipe cleaner | 1-1/4 - 3 in  | 5/16 in / 25 ft                   | Drill powered     | 25 lb  | N/A                   | 125-1460  |
| General | MR-C-O    | Pipe cleaner | 2 - 4 in      | 1/2 in / 50 ft                    | 1/2 hp            | 32 lb  | N/A                   | 125-1440  |
| General | ER-E      | Pipe cleaner | 3 - 6 in      | 5/8 in / 100 ft                   | 1/3 hp            | 80 lb  | N/A                   | 125-1470  |
| General | C-GP-E    | Sewer viewer | 3 - 10 in     | 1-5/8 in / 200 ft (Camera width)  | Electric 110V     | 56 lb  | 7 in Standard (color) | 125-1600  |
| General | JM-1450-A | Jetter       | 1-1/2 in      | 1/4 in / 150 in or 1/8 in / 30 ft | 1-1/2 hp Electric | 111 lb | N/A                   | 125-1500  |
| General | JM-2900   | Jetter       | 3 - 8 in      | 200 ft                            | 13 hp             | 180 lb | N/A                   | 125-1510  |

## PIPE LOCATORS

Quickly locate inspection cameras, sondes, active power lines and utility lines.

### Features and applications include:

- Battery power up to 30 hours
- Ideal for locating almost anything underground with its built-in four-way signal finder.



| MAKE            | MODEL  | TYPE                     | DISPLAY | CONNECTORS                       | WEIGHT  | CAT CLASS |
|-----------------|--------|--------------------------|---------|----------------------------------|---------|-----------|
| General         | GL-100 | Pipe locator             | LCD     | N/A                              | 5 lb    | 125-1610  |
| General         | GL-175 | Line locator transmitter | LCD     | Cables and ground clamp included | 8 lb    | 125-1615  |
| Vivax Metrotech | VM-880 | Ferrous metal detector   | Digital | Mini USB                         | 1.54 lb | 100-7050  |

## PIPE THREADERS

Used to cut grooves or threads on the end of a metal pipe, allowing plumbers, contractors and DIYers to fasten the length of a pipe securely to a coupling or connector.

### Features and applications include:

- Self-contained oil system with adjustable flow control
- Versatility for threading and grooving

**1/2-6 IN**  
PIPE CAPACITY  
**RIDGID**



| MAKE   | MODEL       | TYPE              | PIPE CAPACITY   | POWER REQUIREMENTS                     | WEIGHT | CAT CLASS |
|--------|-------------|-------------------|-----------------|--|--------|-----------|
| Ridgid | 535         | Threading machine | 1/2 in - 2 in   | 115V 15A                               | 260 lb | 125-2300  |
| Ridgid | 1224 Pipe   | Threading machine | 1/2 in - 4 in   | 120V 15A                               | 509 lb | 125-2310  |
| Ridgid | 700         | Handheld threader | 1/2 in - 2 in   | 115V                                   | 25 lb  | 125-2320  |
| Ridgid | 141         | Receding geared   | 2-1/2 in - 4 in | Requires 700, 300 PD or 535 to operate | 93 lb  | 125-2340  |
| Ridgid | 161         | Receding geared   | 4 in - 6 in     | Requires 700, 300 PD or 535 to operate | 158 lb | 125-2350  |
| Ridgid | 300 Compact | Compact           | 1/2 in - 2 in   | 115V 15A                               | 160 lb | 125-2360  |


## PIPE BEVELING TOOLS

Our pipe beveling tools are constructed of durable, lightweight, hard-anodized aluminum for easy transportation to any job site.

### Features and applications include:

- Requires little or no operator skill or training
- Built to withstand the construction, fabrication and welding job site environment

**2-36 IN**  
PIPE SIZE

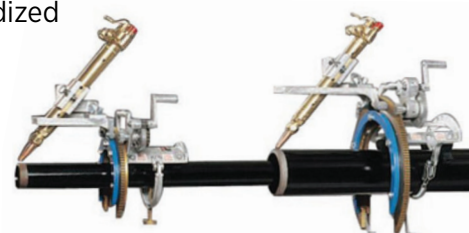

| MAKE | MODEL | PIPE OD       | CAT CLASS |
|------|-------|---------------|-----------|
| H&M  | NO-0  | 2 in - 4 in   | 125-2160  |
| H&M  | NO-1  | 3 in - 8 in   | 125-2170  |
| H&M  | NO-2  | 6 in - 12 in  | 125-2180  |
| H&M  | NO-3  | 12 in - 20 in | 125-2190  |
| H&M  | NO-4  | 20 in - 26 in | 125-2200  |
| H&M  | NO-30 | 30 in - 36 in | 125-2220  |

## PIPE STANDS + VISES

Prepare pipes for cutting with clamps that secure different sized pipes for cutting or threading.

### Features and applications include:

- Rugged tool tray
- Optimized base for more working area
- Collapsible tripod legs make the stand maneuverable and offer stability when cutting

**1/8-24 IN**  
PIPE CAPACITY  
**RIDGID**



| MAKE   | MODEL  | TYPE              | PIPE CAPACITY | LOAD CAPACITY | CAT CLASS |
|--------|--------|-------------------|---------------|---------------|-----------|
| Ridgid | 460    | Tripod chain vise | 1/8 in - 6 in | 1,500 lb      | 912-1520  |
| Sumner | 780395 | Jack with V-head  | 24 in         | 3,500 lb      | 912-1500  |



## PIPE ACCESSORIES

Used for leveling and marking a center line inside or outside a pipe or tank. Lifting and transporting 2,000 pounds of piping.

### Features include:

- Flange Wizard works on 1.5-inch to 10-inch piping or tubing
- Flange Wizard leveling bubble spins 180-degrees
- Can transport 20-inch diameter pipes weighing up to 2,000 lb.



| MAKE          | MODEL  | TYPE        | WEIGHT | CAT CLASS |
|---------------|--------|-------------|--------|-----------|
| Flange Wizard | 53025M | Pipe finder | 6 lb   | 911-5262  |
| Sumner        | 782699 | Cart        | 165 lb | 912-1510  |

## FLANGE SPREADERS

Widens the gap between flanges without damaging flange sealing surfaces.

**1-20 TON**  
CAPACITY



| MAKE    | MODEL   | POWER     | CAPACITY | MAX SPREAD        | CYLINDER | CAT CLASS |
|---------|---------|-----------|----------|-------------------|----------|-----------|
| Enerpac | WR-15   | Hydraulic | 1 Ton    | 11.5 in           | 2.2 in   | 125-2400  |
| Enerpac | FS-56   | Ratchet   | 5 Ton    | 6.10 in           | 1.5 in   | 125-2410  |
| Enerpac | WR-5    | Hydraulic | 1 Ton    | 3.7 in            | 1.00 in  | 125-2420  |
| Enerpac | FS-109  | Hydraulic | 10 Ton   | 3-3/4 in          | 4.05 in  | 125-2440  |
| Enerpac | FSH-14  | Hydraulic | 14 Ton   | 3-1/16 in         | N/A      | 125-2450  |
| Prytech | PHD0535 | Ratchet   | 20 Ton   | 5-1/2 in - 8.5 in | N/A      | 125-2460  |

## CABLE-PULLERS

Ideal for simple, straight shots to pulls with multiple bends and offsets.

**2,000 - 25,000 LB**  
CAPACITY



| MAKE     | MODEL             | TYPE                  | CAPACITY                    | POWER | WEIGHT | CAT CLASS |
|----------|-------------------|-----------------------|-----------------------------|-------|--------|-----------|
| Greenlee | G3                | Cable puller          | 2,000 lb                    | 120V  | 75 lb  | 480-4110  |
| Greenlee | G6                | Cable puller          | 6,000 lb                    | 120V  | 252 lb | 480-4130  |
| Greenlee | UT10 Puller       | Cable puller          | 10,000 lb max pulling force | 120V  | 84 lb  | 480-4150  |
| iToolCo  | CK12              | Cable puller          | 12,000 lb                   | 120V  | 410 lb | 480-4153  |
| Greenlee | 6810 Cable Feeder | Electric cable feeder | 25,000 lb                   | 115V  | 280 lb | 480-4155  |

## BENDERS

Ideal for bending stubs, offsets, saddles, or U-bends in EMT, IMC, PVC coated or rigid conduit.

**1/2-5 IN**  
CAPACITY



| MAKE     | MODEL          | TYPE                     | CAPACITY  | POWER                    | WEIGHT | CAT CLASS |
|----------|----------------|--------------------------|---|--------------------------|--------|-----------|
| Greenlee | 851 PVC Bender | Electric PVC bender      | 1/2 in - 4 in PVC all schedules pipe                  | 120V                     | 53 lb  | 125-1997  |
| Greenlee | 555 Classic    | Electric conduit bender  | 1/2 in - 2 in EMT/IMC/Ridgid/40Mil PVC coated conduit | 120V                     | 260 lb | 125-2000  |
| Greenlee | 885CTE980      | Hydraulic conduit bender | 1 1/4 in - 5 in                                       | 120V                     | 999 lb | 125-2005  |
| Greenlee | 881CTE980      | Hydraulic conduit bender | 2-1/2 in - 4 in EMT, IMC and Ridgid shoe groups       | Electric Hyd pump (120V) | 999 lb | 125-2010  |
| Greenlee | 854 DX         | Electric conduit bender  | 1/2 - 2 in EMT/IMC/Ridgid                             | 120V                     | 550 lb | 125-2020  |

## SHEAVES

Designed to be used with specific cable pullers. Save time by pulling and sliding cable into place.

**4K-8K LB**  
CAPACITY



| MAKE     | MODEL | TYPE       | CAPACITY | WEIGHT    | CAT CLASS |
|----------|-------|------------|----------|-----------|-----------|
| Greenlee | 650   | 6 in hook  | 4,000 lb | 8.8 lb    | 911-3325  |
| Greenlee | 8012  | 12 in hook | 8,000 lb | 28 lb     | 930-2076  |
| Greenlee | 8018  | 18 in hook | 8,000 lb | 2,100 lb  | 930-2076  |
| Greenlee | 8024  | 24 in hook | 8,000 lb | 16,000 lb | 480-1340  |
| Greenlee | 639   | Twin yoke  | 4,000 lb | 1,000 lb  | 930-2236  |
| Greenlee | 6036  | Triple     | 6,500 lb | 28 lb     | 912-3248  |
| Greenlee | 4036  | 8 wheel    | 4,000 lb | 60 lb     | 912-3232  |
| Greenlee | 4048  | 10 wheel   | 4,000 lb | 83 lb     | 912-3234  |
| Greenlee | 658   | Tray       | N/A      | 11 lb     | 912-3246  |

## TRAY ROLLERS

Support and guide cables without damaging cable sheaths and incurring overbending stress on power cables.

**12-36 IN**



| MAKE     | MODEL  | TYPE                        | WEIGHT | CAT CLASS |
|----------|--------|-----------------------------|--------|-----------|
| Greenlee | 2018S  | Straight                    | 8 lb   | 912-3200  |
| Greenlee | 2024S  | Straight                    | 10 lb  | 912-3202  |
| Greenlee | 2030S  | Straight                    | 13 lb  | 912-3204  |
| Greenlee | 2036S  | Straight                    | 15 lb  | 912-3206  |
| Greenlee | 2018R  | Radius                      | 8 lb   | 912-3210  |
| Greenlee | 2024R  | Radius                      | 12 lb  | 912-3212  |
| Greenlee | 2030R  | Radius                      | 13 lb  | 912-3214  |
| Greenlee | 2036R  | Radius                      | 41 lb  | 912-3216  |
| Greenlee | 20249R | Right angle                 | 41 lb  | 912-3220  |
| Greenlee | CTR100 | 4-sided roller guide        | 9 lb   | 912-3225  |
| Greenlee | TR9010 | 90-degree / trapping roller | 14 lb  | 912-3227  |

## HYDRAULIC TORQUING TOOLS

The A Drive Hydraulic Torque Wrench is the hex link that allows the system to fit onto hex nuts in low profile applications.

### Features include:

- Consists of the drive pawl, the ratchet and the drive gear
- 10-50 percent faster than other hydraulic wrenches

**UP TO 16,800 FT LB**  
MAX TORQUE  
**1¼-4<sup>5</sup>/<sub>8</sub> IN**  
LINK SIZE RANGE



| MAKE    | MODEL | MAX TORQUE  | LINK SIZE           | CAT CLASS |
|---------|-------|-------------|---------------------|-----------|
| Alltite | A2    | 2,000 ft lb | Powerhead           | 135-3230  |
| Alltite | A2    | 2,000 ft lb | Hex link 1-1/4 in   | 135-3405  |
| Alltite | A2    | 2,000 ft lb | Hex link 1-5/8 in   | 135-3410  |
| Alltite | A2    | 2,000 ft lb | Hex link 1-7/16 in  | 135-3550  |
| Alltite | A2    | 2,000 ft lb | Hex link 1-13/16 in | 135-3430  |
| Alltite | A4    | 4,000 ft lb | Powerhead           | 135-3210  |
| Alltite | A4    | 4,000 ft lb | Hex link 2 in       | 135-3435  |
| Alltite | A4    | 4,000 ft lb | Hex link 2-3/16 in  | 135-3490  |
| Alltite | A4    | 4,000 ft lb | Hex link 2-3/8 in   | 135-3450  |
| Alltite | A4    | 4,000 ft lb | Hex link 2-9/16 in  | 135-3750  |

| MAKE    | MODEL | MAX TORQUE   | LINK SIZE           | CAT CLASS |
|---------|-------|--------------|---------------------|-----------|
| Alltite | A8    | 8,000 ft lb  | Powerhead           | 135-3130  |
| Alltite | A8    | 8,000 ft lb  | Hex link 2-3/4 in   | 135-3690  |
| Alltite | A8    | 8,000 ft lb  | Hex link 2-15/16 in | 135-3730  |
| Alltite | A8    | 8,000 ft lb  | Hex link 3-1/8 in   | 135-3470  |
| Alltite | A8    | 8,000 ft lb  | Hex link 3-1/2 in   | 135-3530  |
| Alltite | A16   | 16,000 ft lb | Powerhead           | 135-3140  |
| Alltite | A16   | 16,800 ft lb | Hex link 3-7/8 in   | 135-3610  |
| Alltite | A16   | 16,800 ft lb | Hex link 4-1/4 in   | 135-3630  |
| Alltite | A16   | 16,800 ft lb | Hex link 4-5/8 in   | 135-3650  |

## PNEUMATIC TORQUING TOOLS

These wrenches offer smooth, precise accuracy, rugged durability and safe, ergonomic operation with the user in mind.

### Features include:

- Ergonomic pistol grip
- Cast reaction arm provides safe, strong reaction point

**¾-1½ IN**  
DRIVE SIZES



| MAKE   | MODEL          | DRIVE SIZE | TORQUE RANGE | WEIGHT | CAT CLASS |
|--------|----------------|------------|--------------|--------|-----------|
| TorcUp | Raptor RP-1000 | 3/4 in     | 1,000 ft lb  | 12 lb  | 135-2755  |
| TorcUp | Raptor RP-3000 | 1 in       | 3,000 ft lb  | 20 lb  | 135-2757  |
| TorcUp | Raptor RP-6000 | 1-1/2 in   | 6,000 ft lb  | 36 lb  | 135-2760  |

## MANUAL TORQUING AND ACCESSORIES



| MAKE    | MODEL      | TYPE                    | SIZE                  | DRIVE                    | CAT CLASS |
|---------|------------|-------------------------|-----------------------|--------------------------|-----------|
| Alltite | X4-TD1000  | Wrench multiplier       | 2,000 ft lb 1:4 ratio | 3/4 in (In) 1 in (Out)   | 135-3310  |
| Proto   | 6212       | Wrench multiplier       | 1,200 ft lb 1:6 ratio | 1/2 in (In) 3/4 in (Out) | 135-3350  |
| Wright  | 3477       | Manual torquing wrench  | 10-100 ft lb          | 3/8 in                   | 135-3390  |
| Proto   | 6020       | Manual torquing wrench  | 120-600 ft lb         | 3/4 in                   | 135-3290  |
| Wright  | 8447       | Manual torquing wrench  | 200-1,000 ft lb       | 1 in                     | 135-3370  |
| Alltite | Revolution | Electric hydraulic pump | 67 lb                 | N/A                      | 130-1760  |



## LADDERS

Sturdy, lightweight and feature a variety of safety mechanisms such as cages, guardrails, outriggers, ground cue indicators, slip-prevention legs and more.

### 4-40 FT EXTENSION



| MAKE         | MODEL     | TYPE                            | EXTENSION | DUTY RATING | WEIGHT  | CAT CLASS |
|--------------|-----------|---------------------------------|-----------|-------------|---------|-----------|
| Little Giant | 17824     | HyperLite SumoStance fiberglass | 24 ft     | 1A-300 lb   | 51 lb   | 930-4068  |
| Little Giant | 17828     | HyperLite SumoStance fiberglass | 28 ft     | 1A-300 lb   | 56.5 lb | 930-4072  |
| Little Giant | 17840     | HyperLite SumoStance fiberglass | 40 ft     | 1A-300 lb   | 70 lb   | 930-4084  |
| Little Giant | 19604     | Safety cage fiberglass step     | 4 ft      | 1AA-375 lb  | 53 lb   | 930-4244  |
| Little Giant | 19606     | Safety cage fiberglass step     | 6 ft      | 1AA-375 lb  | 67 lb   | 930-4246  |
| Little Giant | 19608     | Safety cage fiberglass step     | 8 ft      | 1AA-375 lb  | 84 lb   | 930-4248  |
| Little Giant | 19610     | Safety cage fiberglass step     | 10 ft     | 1A-300 lb   | 80 lb   | 930-4250  |
| Little Giant | 18509-817 | Adjustable cage fiberglass step | 5-9 ft    | 1AA-375 lb  | 130 lb  | 930-4252  |
| Little Giant | 18515-817 | Adjustable cage fiberglass step | 8-14 ft   | 1AA-375 lb  | 153 lb  | 930-4254  |

## HYDROSTATIC TEST PUMPS

Used to fill a tank/chamber/vessel with a liquid dye to find and locate leaks.

### Features include:

- Handles up to 10% chlorine solution
- Ability to run dry without damage

**500-10,000 PSI** 



| MAKE | MODEL  | MAXIMUM PSI | VOLUME   | POWER                          | INLET          | OUTLET | DIMENSIONS (LWH)      | WEIGHT | CAT CLASS |
|------|--------|-------------|----------|--------------------------------|----------------|--------|-----------------------|--------|-----------|
| Rice | EL1A   | 500 psi     | 3 gpm    | 1 hp electric motor, TEFC, 110 | 3/4 in         | 1/2 in | 22 in / 14 in / 14 in | 76 lb  | 125-1210  |
| Rice | DPH-3B | 550 psi     | 11 gpm   | 6.5 hp Honda gas               | 1 in hose barb | 1/2 in | 25 in / 21 in / 17 in | 91 lb  | 125-1240  |
| Rice | hp10-B | 10,000 psi  | 80 cu in | Compressed air 100 psi         | N/A            | N/A    | 26 in / 25 in / 43 in | 155 lb | 125-1300  |

## PLASMA CUTTERS

Cut through electrically conductive material like steel, stainless steel, aluminum, brass, copper and more with ease.

### Features include:





- Easy to use with simple controls, greater portability
- FastConnect torches, CNC interface, and four work lead styles increase versatility for handheld and mechanized use

**3/4-2 1/4 IN  
CAPACITY**



| MAKE       | MODEL           | INPUT POWER   | DUTY CYCLE  | CAPACITY                                | WEIGHT | CAT CLASS |
|------------|-----------------|---|---|---|--------|-----------|
| Hypertherm | Powermax 30 AIR | 120-240V 1PH, 29-15A  | 20% 120V, 35% 240V  | 3/8 in production, 5/8 in severance     | 30 lb  | 550-3015  |
| Hypertherm | Powermax 45     | 200/240 1PH/ 480 3PH  | 50% @ 45 A, 200 - 240 V, 1-PH 60% @ 41 A, 200 - 240 V, 1-PH 100% @ 32 A, 200 - 240 V, 1-P | 1/2 in - 1 in                           | 37 lb  | 550-3010  |
| Hypertherm | Powermax 65     | 200/208/240/480V, 1PH 52/50/44/22A<br>200/208/240/480/600V, 3PH 32/31/27/13/13A | 40% @ 65A 200-208V, 50% @ 65A 230-600V, 100% @ 46A 230-600V                               | 3/4 in production, 1-1/4 in severance   | 64 lb  | 550-3030  |
| Hypertherm | Powermax 125    | 480/600V, 3PH 31/24A  | 100% @ 125A   | 1-3/4 in production, 2-1/4 in severance | 108 lb | 550-3060  |

## WELDING INFORMATION

|   |   |   |
|---|---|---|
| <b>What welding process is needed?</b>        | <p><b>Stick Welding</b><br/>Uses electricity to melt and join a metal joint with a filler electrode.</p> <p><b>MIG Welding</b><br/>Joins metals by heating them with arc which is continuously fed with a filler metal electrode.</p> <p><b>Flux-cored Arc Welding</b><br/>Melts and joins metals by heating them with an arc between a continuously fed electrode.</p> | <p><b>TIG Welding</b><br/>Joins metals by heating them with an tungsten electrode.</p> <p><b>Plasma Arc Cutting (PAC)</b><br/>Severs metal by using a constricted arc to melt a small area of work.</p> <p><b>Air Carbon Arc Cutting (CAC)</b><br/>Melts metals by the heat of an arc using a carbon electrode.</p> |
| <b>Where will the welder be used?</b>         | <p> <b>Indoors</b><br/>Use electric or LPG welders</p>   | <p> <b>Outdoors</b><br/>Use electric, diesel, gas or LPG welders</p>   |
| <b>Is shore power available?</b>              | <p> <b>YES</b><br/>Electric welders are a great cost effective option.</p>   | <p> <b>NO</b><br/>Use diesel, gas, LPG, or electric welders with an ancillary generator.</p>   |
| <b>What voltage and phases are available?</b> | The machine has to match the power at the site: 120V, 280V, 230V, 460V, or 575V. You'll also need to determine whether single-phase or three-phase power is available.  |   |

| MODEL                | CAT CLASS | STICK | MIG | FLUX-CORED | AC TIG | DC TIG | PAC | CAC-A   | METALS                                       | AMP RANGE             | GENERATOR POWER     |
|----------------------|-----------|-------|-----|------------|--------|--------|-----|---------|--|-----------------------|---------------------|
| Bobcat 250 Gas       | 550-1600  | ●     | ●●  | ●          | ●●     | ●      |     | 3/16 in | Steel, Aluminum, Stainless                   | 40-250 CC<br>9-275 CV | 1-Phase             |
| Bobcat 250 LP        | 550-1760  | ●     | ●●  | ●          | ●●     | ●      |     | 3/16 in | Steel, Aluminum, Stainless                   | 40-250 CC<br>9-275 CV | 1-Phase             |
| Trailblazer 325 DSL  | 550-1850  | ●     | ●   | ●          |        | ●      | ●●  | 3/16 in | Steel, Stainless                             | 10-325 DC             | 1-Phase             |
| Big Blue 450 Duo CST | 550-1905  | ●     |     |            |        | ●      |     | 1/4 in  | Steel, Stainless                             | 5-280 DC X 2          | V3-Phase            |
| Big Blue 400 Pro     | 550-1870  | ●     | ●   | ●          |        | ●      | ●●  | 1/4 in  | Steel, Stainless                             | 20-400 DC             | 1-Phase             |
| Millermatic 141      | 550-1950  |       | ●   | ●●         |        |        |     |         | Steel, Stainless and Aluminum with Spool Gun | 30-140 DC             | 1-Phase             |
| CST-280              | 550-1280  | ●     |     |            |        | ●      |     | 3/16 in | Steel, Stainless                             | 5-280 DC              | 1/3-Phase           |
| XMT-350              | 550-1300  | ●     | ●   | ●          |        | ●      | ●●  | 1/4 in  | Steel, Stainless & Pulse with Smart Feeder   | 5-425 DC              | 1/3-Phase           |
| XMT-450              | 550-1315  | ●     | ●   | ●          |        | ●      | ●●  | 1/4 in  | Steel, Stainless & Pulse with Smart Feeder   | 15-600 DC             | 3-Phase             |
| RANGER 250GXT        | 550-1600  | ●     | ●   | ●          | ●●     | ●      |     | 3/16 in | Steel, Aluminum, Stainless                   | 50-250 CC/CV          | 1-Phase             |
| RANGER 305D          | 550-1850  | ●     | ●   | ●          | ●●     | ●      |     | 3/16 in | Steel, Aluminum, Stainless                   | 20-305 CC/CV          | 1-Phase             |
| VANTAGE 322          | 550-1870  | ●     | ●   | ●          | ●●     | ●      |     | 1/4 in  | Steel, Aluminum, Stainless                   | 20-400 CC/CV          | 1-Phase and 3-Phase |
| VANTAGE 549X         | 550-1880  | ●     | ●   | ●          | ●●     | ●      |     | 3/8 in  | Steel, Aluminum, Stainless                   | 20-575 CC/CV          | 1-Phase and 3-Phase |
| INVERTEC V276        | 550-1280  | ●     |     | ●          |        | ●      |     | 3/16 in | Steel, Aluminum, Stainless                   | 20-275 CC             |                     |
| FLEXTEC 500X         | 550-1310  | ●     | ●   | ●          |        | ●      |     | 5/16 in | Steel, Aluminum, Stainless                   | 5-500 CC/CV           |                     |
| FLEXTEC 650X         | 550-1330  | ●     | ●   | ●          |        | ●      |     | 3/8 in  | Steel, Aluminum, Stainless                   | 10-815 CC/CV          |                     |

- Designed for this process
- Capable of this process

**Constant Current (CC):** Commonly used for stick and TIG welding

**Constant Voltage (CV):** Commonly used for MIG welding

**Duty Cycle:** The number of minutes out of a 10 minute time period a welding machine can be operated at max output.

## ELECTRIC WELDERS



Designed for indoor welding.

**Features include:**

- Compatible with wireless remote controls
- Stationary and towable welders available

**280-650 AMP**  
RATED OUTPUT



| MAKE    | MODEL             | POWER REQUIREMENTS     | PROCESSES                                | RATED OUTPUT @ DUTY CYCLE % | WEIGHT  | CAT CLASS |
|---------|-------------------|------------------------|--|-----------------------------|---------|-----------|
| Miller  | CST-280           | 220/230/240/460V       | STICK, DC TIG                            | 250A / 31.2 VDC @ 35%       | 41 lb   | 550-1280  |
| Lincoln | INVERTEC V276     | 208-575V 1-3PH 50-60Hz | STICK, DC TIG                            | 275A / 31 VDC @ 35%         | 54.4 lb | 550-1280  |
| Lincoln | FLEXTEC 500X      | 380-575V 3PH 50-60Hz   | STICK, FLUX CORE, DC TIG, MIG            | 500A / 40 VDC @ 60%         | 136 lb  | 550-1310  |
| Lincoln | FLEXTEC 650X      | 380-575V 3PH 50-60Hz   | STICK, FLUX CORE, DC TIG, MIG            | 750A / 44 VDC @ 60%         | 165 lb  | 550-1330  |
| Miller  | XMT-350 FIELD PRO | 208-575V 1PH OR 3PH    | STICK, TIG, MIG, FLUX CORED, ARC GOUGING | 350A / 34 VDC @ 60%         | 100 lb  | 550-1300  |
| Miller  | MILLERMATIC 141   | 120V/20A               | MIG, FLUX CORED                          | 40A / 16 VDC @ 40%          | 51 lb   | 550-1950  |

## ENGINE DRIVEN WELDERS

Designed for Stick/TIG welding pipe and plate in the construction industry.

**Features include:**

- Compatible with wireless remote controls
- Stationary and towable welders available

**180-500 AMP**  
RATED OUTPUT



| MAKE      | MODEL            | POWER REQUIREMENTS | PROCESSES                             | RATED OUTPUT @ DUTY CYCLE % | GENERATOR OUTPUT (PEAK)         | WEIGHT   | CAT CLASS |
|-----------|------------------|--------------------|---------------------------------------|-----------------------------|---------------------------------|----------|-----------|
| Multiquip | GAW180HEA        | Gas                | STICK, FLUX CORED                     | 180A / 27 VDC @ 50%         | 3,000W                          | 246 lb   | 550-1540  |
| Miller    | Bobcat 250       | Gas                | STICK, FLUX CORED, DC TIG, MIG        | 225A / 25 VDC @ 100%        | 11,000W                         | 601 lb   | 550-1600  |
| Lincoln   | Ranger 250GXT    | Gas                | STICK, FLUX CORE, DC TIG, MIG         | 250A / 25 VDC @ 100%        | 11,000W                         | 602 lb   | 550-1600  |
| Lincoln   | Ranger 305LPG    | LP                 | STICK, FLUX CORE, DC TIG, MIG         | 300A / 25 VDC @ 100%        | 10,000W                         | 408 lb   | 550-1760  |
| Miller    | Bobcat 250       | Diesel             | STICK, FLUX CORED, DC TIG, MIG        | 225A / 25 VDC @ 100%        | 11,000W                         | 635 lb   | 550-1760  |
| Miller    | Trailblazer 325D | Diesel             | STICK, FLUX CORED, DC TIG, MIG, CAC-A | 320A / 33 VDC @ 100%        | 12,000W                         | 801 lb   | 550-1850  |
| Lincoln   | Ranger 305D      | Diesel             | STICK, FLUX CORE, DC TIG, MIG         | 300A / 29 VDC @ 100%        | 11,000W                         | 698 lb   | 550-1850  |
| Miller    | Big Blue 400 Pro | Diesel             | STICK, FLUX CORED, DC TIG, MIG, CAC-A | 400A / 24 VDC @ 100%        | 12,000W                         | 1,130 lb | 550-1870  |
| Lincoln   | Vantage 322      | Diesel             | STICK, FLUX CORE, DC TIG, MIG         | 300A / 32 VDC @ 100%        | 11,500W (1PH);<br>12,500W (3PH) | 1,035 lb | 550-1870  |
| Lincoln   | Vantage 549X     | Diesel             | STICK, FLUX CORE, DC TIG, MIG         | 525A / 41 VDC @ 100%        | 11,000W (1PH);<br>19,000W (3PH) | 1,662 lb | 550-1880  |

## FUME EXTRACTORS



Captures fumes and small weld particles when welding.

**Features include:**

- Includes 8 foot hose
- Flexible funnel magnetic nozzle

**UP TO 132 CFM**



| MAKE    | MODEL   | INPUT POWER   | PROCESSES      | RATED OUTPUT             | DIMENSIONS (LWH)          | WEIGHT | CAT CLASS |
|---------|---|---------------|----------------|--------------------------|---------------------------|--------|-----------|
| Miller  | Filtair 130                                   | 120B          | Fume extractor | 132 cfm                  | 12 in / 12 in / 23 in     | 46 lb  | 550-1400  |
| Lincoln | X-TRACTOR MINI (previously known as MINIFLEX) | 120V 1PH 60Hz | Fume extractor | 95 cfm-Low; 108 cfm-High | 16.8 in / 15.6 in / 29 in | 40 lb  | 550-1400  |

## MULTIPLE OPERATOR RACKS

### CST RACKS

**4-8**  
PACK  
RACKS



### XMT RACKS

**4-6**  
PACK  
RACKS



## WELDING SOLUTIONS



**WELDER:** CST-280 **RACK:** 4-PACK **POWER:** DCA70SSIU4F



**WELDER:** XMT-350 **RACK:** 4-PACK **POWER:** DCA70SSIU4F

|                            |                                    |                   |          |
|----------------------------|------------------------------------|-------------------|----------|
| <b>WELDER MODEL</b>        | CST-280 4-Pack Rack                |                   |          |
| <b>INPUT POWER TO RACK</b> | 220-230/460-575 VAC, 50/60 Hz, 3PH |                   |          |
| <b>KVA</b>                 | 58.4                               |                   |          |
| <b>KW</b>                  | 40.8                               |                   |          |
| <b>CAT CLASS</b>           | 912-4654                           |                   |          |
| <b>GENERATOR MODEL</b>     | DCA70SSIU4F                        |                   |          |
| <b>KW PRIME (STANDBY)</b>  | 56 (62)                            |                   |          |
| <b>DRY WEIGHT</b>          | 4,420 lb                           | <b>WET WEIGHT</b> | 5,300 lb |
| <b>TOTAL FUEL CAPACITY</b> | 103 gal                            |                   |          |
| <b>FUEL CONSUMPTION</b>    | 4.40 pgh Full Load                 |                   |          |
| <b>RUN TIME</b>            | 23 hrs                             |                   |          |
| <b>CAT-CLASS</b>           | 501-1055                           |                   |          |

|                            |                                 |                   |          |
|----------------------------|---------------------------------|-------------------|----------|
| <b>WELDER MODEL</b>        | XMT-350 4 Pack Rack             |                   |          |
| <b>INPUT POWER TO RACK</b> | 208-575 VAC, 50/60 Hz, 1 or 3PH |                   |          |
| <b>KVA</b>                 | 56.8                            |                   |          |
| <b>KW</b>                  | 54.4                            |                   |          |
| <b>CAT CLASS</b>           | 912-4650                        |                   |          |
| <b>GENERATOR MODEL</b>     | DCA70SSIU4F                     |                   |          |
| <b>KW PRIME (STANDBY)</b>  | 56 (62)                         |                   |          |
| <b>DRY WEIGHT</b>          | 4,420 lb                        | <b>WET WEIGHT</b> | 5,300 lb |
| <b>TOTAL FUEL CAPACITY</b> | 103 gal                         |                   |          |
| <b>FUEL CONSUMPTION</b>    | 4.40 pgh Full Load              |                   |          |
| <b>RUN TIME</b>            | 23 hrs                          |                   |          |
| <b>CAT-CLASS</b>           | 501-1055                        |                   |          |



**WELDER:** CST-280 **RACK:** 8-PACK **POWER:** DCA125SSIU4F



**WELDER:** XMT-350 **RACK:** 6-PACK **POWER:** DCA125SSIU4F

|                            |                                    |                   |          |
|----------------------------|------------------------------------|-------------------|----------|
| <b>WELDER MODEL</b>        | CST-280 8-Pack Rack                |                   |          |
| <b>INPUT POWER TO RACK</b> | 220-230/460-575 VAC, 50/60 Hz, 3PH |                   |          |
| <b>KVA</b>                 | 116.8                              |                   |          |
| <b>KW</b>                  | 81.6                               |                   |          |
| <b>CAT CLASS</b>           | 912-4658                           |                   |          |
| <b>GENERATOR MODEL</b>     | DCA125SSIU4F                       |                   |          |
| <b>KW PRIME (STANDBY)</b>  | 100 (110)                          |                   |          |
| <b>DRY WEIGHT</b>          | 6,065 lb                           | <b>WET WEIGHT</b> | 7,475 lb |
| <b>TOTAL FUEL CAPACITY</b> | 169 gal                            |                   |          |
| <b>FUEL CONSUMPTION</b>    | 7.11 gph Full Load                 |                   |          |
| <b>RUN TIME</b>            | 23 hrs                             |                   |          |
| <b>CAT-CLASS</b>           | 501-1105                           |                   |          |

|                            |                     |                   |          |
|----------------------------|---------------------|-------------------|----------|
| <b>WELDER MODEL</b>        | XMT-350 6 Pack Rack |                   |          |
| <b>INPUT POWER TO RACK</b> | 460/480/575, 3PH    |                   |          |
| <b>KVA</b>                 | 85.5                |                   |          |
| <b>KW</b>                  | 81.6                |                   |          |
| <b>CAT CLASS</b>           | 912-4652            |                   |          |
| <b>GENERATOR MODEL</b>     | DCA125SSIU4F        |                   |          |
| <b>KW PRIME (STANDBY)</b>  | 100 (110)           |                   |          |
| <b>DRY WEIGHT</b>          | 6,065 lb            | <b>WET WEIGHT</b> | 7,475 lb |
| <b>TOTAL FUEL CAPACITY</b> | 169 gal             |                   |          |
| <b>FUEL CONSUMPTION</b>    | 7.11 gph Full Load  |                   |          |
| <b>RUN TIME</b>            | 23 hrs              |                   |          |
| <b>CAT-CLASS</b>           | 501-1105            |                   |          |




## ELECTRIC VS DIESEL WELDING COST SAVINGS



One 350 amp multi-operator 6-Pack Rack




Six 325 amp trailer mounted diesel welders



**108** Truckload: 108 welders  
On a standard 53 ft flatbed

## CAPACITY



**15** Truckload: 15 welders  
On a standard 53 ft flatbed

**ZERO**  
emissions



**ZERO**  
GPH

## EMISSIONS

**T4F**  
emissions

**4.5**  
GPH  
6 welders  
at .75 gph



**Shore Power**  
Direct power for  
continuous operation

## POWER



**Diesel Power**  
Requires daily refueling

**18** total sq ft

## FOOT PRINT

**240** total sq ft



|                                | ONE 6-PACK OF 350 AMP INVERTERS POWERED BY SHORE POWER | ONE 6-PACK OF 350 AMP INVERTERS POWERED BY 100KW PORTABLE GENERATOR | SIX DIESEL TRAILBLAZER 325D WELDERS      |
|--------------------------------|--|---|--|
| AMPERAGE OUTPUT POTENTIAL      | 2,100 Amps   | 2,100 Amps  | 1,950 Amps                               |
| MAX RUN TIME                   | Unlimited  | 30 Hours  | 12 Hours per welder                      |
| FUEL CONSUMPTION PER HOUR *    | 0 Gal  | 5 Gal   | 4.5 Gal (.75 gph per welder / 6 welders) |
| DIESEL PRICE PER GALLON AVG.   | \$5.27   | \$5.27  | \$5.27                                   |
| FUEL COST PER HOUR             | \$0  | \$26.35   | \$23.72                                  |
| WORK HOURS PER MONTH **        | 200  | 200   | 200                                      |
| FUEL COST PER MONTH            | \$0  | \$5,270   | \$4,744                                  |
| LABOR COST TO REFUEL PER MONTH | \$0  | \$53 ***  | \$900 ****                               |
| TOTAL FUELING COST PER MONTH   | <b>\$0</b>   | <b>\$5,323</b>  | <b>\$5,644</b>                           |

\* Fuel consumption will vary based on welding amperage. Example shown is based on 200 amps @ 100% Duty Cycle

\*\* 10 hour shifts per day / 20 workdays per month

\*\*\* 15 minutes to fuel one generator (1) time every 3 days

\*\*\*\* 1.5 Hours per day to refuel (6) welders at \$30 per hour / 20 workdays per month

## COLD WATER PRESSURE WASHERS



\*Eco Clean options available

From light, home DIY use to heavy-duty pressure washing.

### Features and applications include:

- Multiple and easy connect nozzles
- Ideal for washing construction, farm and industrial equipment; other uses include washing stone walls, sidewalks, gutters, doors, concrete floors, fences and more

# 1K-5K PSI

MAX PSI



| MAKE   | MODEL         | MOTOR TYPE / CAPACITY          | MAX PSI   | MAX GPM | DIMENSIONS (LWH)          | WEIGHT | CAT CLASS |
|--------|---------------|--------------------------------|-----------|---------|---------------------------|--------|-----------|
| Mi-T-M | CD-1002-3MUH  | Electric / 120V 12.5A          | 1,000 psi | 2.0 gpm | 20 in / 11.5 in / 14 in   | 58 lb  | 105-2010  |
| Mi-T-M | CW-2505-4MGH  | Gas 389cc Honda OHV / 1.6 gal  | 2,500 psi | 4.4 gpm | 45.5 in / 28 in / 26 in   | 216 lb | 105-2020  |
| Mi-T-M | CBA-4004-1MGH | Gas 389cc Honda OHV / 1.6 gal  | 4,000 psi | 4.0 gpm | 47 in / 27.5 in / 28.5 in | 165 lb | 105-2050  |
| Mi-T-M | CWC-5004-4MGH | Gas 680cc Honda OHV / 13.0 gal | 5,000 psi | 4.0 gpm | 43 in / 27.75 in / 36 in  | 398 lb | 105-2070  |

## COLD WATER PRESSURE WASHER W/ ROTARY SURFACE CLEANER

All-in-one unit for pressure washing and surface cleaning

### Features and applications include:

- Multiple and easy connect nozzles
- Complete solution for quick, streak-free cleaning business entrances, parking lots, driveways, pool decks, and sidewalks

# 4,000 PSI

MAX PSI



| MAKE    | MODEL               | MOTOR TYPE / CAPACITY           | MAX PSI   | MAX GPM | DIMENSIONS (LWH)            | WEIGHT | CAT CLASS |
|---------|---------------------|---------------------------------|-----------|---------|-----------------------------|--------|-----------|
| Karcher | Jarvis SCW 4.0/40 G | Gas 420cc Karcher OHV / 1.7 gal | 4,000 psi | 4.0 gpm | 52.5 in / 34.5 in / 35.1 in | 212 lb | 105-2065  |

## HOT WATER PRESSURE WASHERS



\*Eco Clean options available

Gasoline or electric-powered hot water pressure washers with oil-fired burners.

### Features and applications include:

- Highly portable, thanks to four pneumatic tires
- Belt-driven tri-plex pump
- High-pressure detergent application
- Ideal for industrial use, food service industry and anywhere unwanted oil and grease accumulates

# 3.6-4 HRS

RUN TIME



| MAKE   | MODEL              | MOTOR TYPE / CAPACITY                    | MAX PSI   | MAX GPM | DIMENSIONS (LWH)        | WEIGHT | CAT CLASS |
|--------|--------------------|--|-----------|---------|-------------------------|--------|-----------|
| Alkota | 212AX4X (HERC212E) | Electric 2 hp / 115V                     | 1,200 psi | 2.0 gpm | 40 in / 27 in / 40 in   | 420 lb | 105-2505  |
| Alkota | 3305X4X (HERC330G) | 9 hp Honda gas w diesel burner / 8 gal   | 3,500 psi | 3.0 gpm | 53 in / 31.5 in / 50 in | 650 lb | 105-2515  |
| Mi-T-M | HSP-3003-3MGH      | 9 hp Honda gas w diesel burner / 5.5 gal | 3,000 psi | 2.9 gpm | 43 in / 30 in / 41 in   | 407 lb | 105-2515  |

## TOW BEHIND HOT PRESSURE WASHERS

### Features include:

- Electric start
- 200-degree max outlet temperature
- Professional-grade insulated trigger gun with safety lock-off
- External bypass system allows more water into the system to protect from heat build-up

**3.7-5 GPM**

**4,000 PSI**

MAX PSI



| MAKE   | MODEL         | MOTOR  | WATER TANK CAPACITY | MAX PSI   | MAX GPM | DIMENSIONS (LWH)         | GVW      | CAT CLASS |
|--------|---------------|--|---------------------|-----------|---------|--------------------------|----------|-----------|
| Mi-T-M | HMT-4004-OMGV | Gas 14 hp Vanguard w/ diesel burner          | N/A                 | 4,000 psi | 3.7 gpm | 99 in / 43.5 in / 36 in  | 1,000 lb | 105-2805  |
| Mi-T-M | HS-3505-IMGH  | Gas 20.3 hp Honda GX630 OHV w/ diesel burner | 200 gal             | 3,500 psi | 4.7 gpm | 101 in / 60 in / 66.5 in | 7,500 lb | 105-2810  |
| Alkota | 5357K         | Diesel 20.3 hp Kubota w/ diesel burner       | 330 gal             | 3,500 psi | 5.0 gpm | 168 in / 72 in / 54 in   | 7,500 lb | 105-2800  |

## PRESSURE WASHER ACCESSORIES

Capable of cleaning any flat surface area. Can be used with hot water.

### Features and applications include:

- 20-28 in diameter allows for cleaning of larger surfaces
- Compatible with any pressure washer up to 4,000 PSI
- Quickly clean decks, driveways, sidewalks and parking lots

**2.5-10 GPM**

WATER VOLUME




| MAKE   | MODEL        | TYPE                               | WIDTH | PSI             | WATER VOLUME | CAT CLASS |
|--------|--------------|------------------------------------|-------|-----------------|--------------|-----------|
| Mi-T-M | AW-7020-8003 | Rotary surface cleaner             | 20 in | Up to 4,000 psi | 3 to 5 gpm   | 902-6533  |
| Mi-T-M | AW-7020-8001 | Rotary surface cleaner with wheels | 28 in | Up to 4,000 psi | 4 to 10 gpm  | 902-6536  |
| Mi-T-M | AW-7018-1200 | Telescoping wand to 12 ft          | N/A   | Up to 4,000 psi | 2.5 TO 5 gpm | 902-6508  |

**HercRentals®**

## Industrial Project and Tool Management

In this fully customizable solution, customers are provided with a trailer packed with the tools they need.

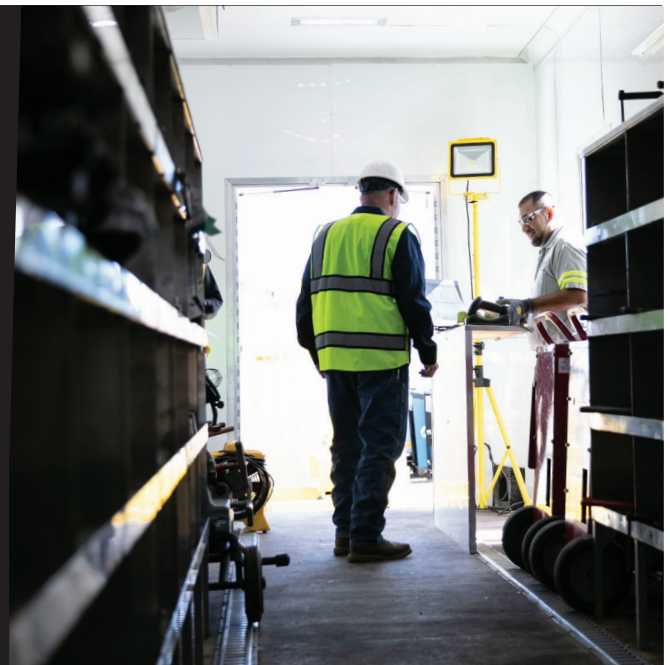



# LAWN AND LANDSCAPE



Stump Grinders  
Trenchers  
Mowers  
Augers  
Tillers

Chainsaws  
Leaf Blowers  
Dethatchers  
Sod Cutters  
Aerators

Log Splitters  
Wood Chippers



## STUMP GRINDERS

### Features include:

- Hi-drive track system provides superior climbing capability, maneuverability, and greater hillside stability
- All-hydraulic sweep control valve facilitates side-to-side feathering for superior stump grinding

**9.5-19 IN**  
CUTTING WHEEL



| MAKE    | MODEL  | CUTTING WHEEL | BELOW GROUND CUTTING CAPACITY | ABOVE GROUND CUTTING CAPACITY | POWER     | DIMENSION (LWH)        | WEIGHT   | CAT CLASS |
|---------|--------|---------------|-------------------------------|-------------------------------|-----------|------------------------|----------|-----------|
| Toro    | SRG-13 | 9.5 in        | 11 in                         | 14 in                         | 14 hp Gas | 6 in / 29.5 in / 42 in | 240 lb   | 115-3600  |
| Toro    | STX-26 | 19 in         | 12.5 in                       | 35 in                         | 26 hp Gas | 78 in / 34 in / 46 in  | 1,200 lb | 115-3610  |
| Vermeer | SC30TX | 16 in         | 12 in                         | 25 in                         | 25 hp Gas | 94 in / 35 in / 49 in  | 1,550 lb | 115-3610  |

## TRENCHERS

### Features include:

- Easy-to-use control system
- Zero-turn capability
- Tracks disperse weight, providing high flotation in loose sand or mud

**18-36 IN**  
CUTTING DEPTH



| MAKE        | MODEL  | TYPE                        | SIZE  | POWER      | DIMENSION (LWH)           | WEIGHT   | CAT CLASS |
|-------------|--------|-----------------------------|-------|------------|---------------------------|----------|-----------|
| Ditch Witch | C16X   | Walk-behind trencher        | 24 in | 16 hp Gas  | 94 in / 35.8 in / 63 in   | 1,895 lb | 280-1020  |
| Toro        | TRX-20 | Walk-behind trencher        | 36 in | 20 hp Gas  | 82.5 in / 33.8 in / 46 in | 1,133 lb | 280-1040  |
| Ground Hog  | T-4    | Operator propelled trencher | 18 in | 5.5 hp Gas | 60 in / 24 in / 41 in     | 230 lb   | 280-1060  |

## MOWERS

Mow tall grass, chop through thick brush and maintain landscapes.



| MAKE       | MODEL      | TYPE             | SIZE  | POWER      | DIMENSION (LWH)         | WEIGHT | CAT CLASS |
|------------|------------|------------------|-------|------------|-------------------------|--------|-----------|
| Honda      | HRC2163HXA | Mower (rear bag) | 21 in | 5.5 hp Gas | 64.4 in / 23 in / 40 in | 127 lb | 115-2200  |
| Billy Goat | BC2600HH   | Brushcutter      | 26 in | 13 hp Gas  | 83 in / 31 in           | 335 lb | 115-2230  |

## AUGERS

Designed to drill and loosen tough soil.

### Features include:

- Variable speed, forward and reverse auger rotation
- Drilling head pivots from side to side for drilling on uneven terrain

**2-18 IN**  
AUGER WIDTH



| MAKE       | MODEL   | TYPE                          | SIZE  | POWER      | DIMENSION (LWH)           | WEIGHT | CAT CLASS |
|------------|---------|-------------------------------|-------|------------|---------------------------|--------|-----------|
| Ground Hog | HD99    | Towable single operator auger | 18 in | 9 hp Gas   | 100 in / 34 in / 38 in    | 295 lb | 115-2500  |
| Stihl      | BT131   | Single operator auger         | 10 in | 1.9 hp Gas | N/A                       | 22 lb  | 115-2490  |
| Ground Hog | C-71-5H | Dual operator auger           | 12 in | 5.5 hp Gas | 40.5 in / 30 in / 20.5 in | 72 lb  | 115-2540  |

## TILLERS

Ideal for breaking up hardened surface dirt and preparing soil for planting.

### Features include:

- Mid and heavy-duty tillers available
- Counter-rotating lines cut through sod/hard soil
- Simple and easy-to-use

**20-26 IN**  
TILLING WIDTH

**HONDA**



| MAKE    | MODEL  | TYPE                | SIZE  | POWER           | DIMENSION (LWH)             | WEIGHT | CAT CLASS |
|---------|--------|---------------------|-------|-----------------|-----------------------------|--------|-----------|
| Honda   | FC600  | Mid-tine Rototiller | 26 in | 5.5 hp Gasoline | 55.9 in / 26.4 in / 42.3 in | 128 lb | 115-1550  |
| Barreto | E1320H | Rear-tine Tiller    | 20 in | 13 hp Gasoline  | 77 in / 27 in / 44 in       | 560 lb | 115-1590  |

## CHAINSAWS

### Features include:

- Powerful, versatile, fuel-efficient and technologically advanced

**7-25 IN**  
LENGTH

**STIHL**



| MAKE  | MODEL     | TYPE        | SIZE                   | POWER           | WEIGHT  | CAT CLASS |
|-------|-----------|-------------|------------------------|-----------------|---------|-----------|
| Stihl | MSE210CBQ | Chainsaw    | 16 in                  | 1.8 kW Electric | 9.4 lb  | 115-2700  |
| Stihl | HT131     | Pole pruner | 7 ft 6 in - 11 ft 6 in | 36.3 cc Gas     | 17.3 lb | 115-2755  |
| Stihl | MS362C-M  | Chainsaw    | 25 in                  | 59 cc Gas       | 12.3 lb | 115-2790  |
| Stihl | MS461     | Chainsaw    | 32 in                  | 76.5 cc Gas     | 14.6 lb | 115-2810  |

## LEAF BLOWERS AND VACUUMS

Clean up from lawn maintenance and lot debris including grass, mulch, cans bottles and more.

### Features include:

- Powerful, versatile, fuel-efficient and technologically advanced

**STIHL**



| MAKE       | MODEL     | TYPE                   | SIZE  | POWER       | DIMENSION (LWH)             | WEIGHT  | CAT CLASS |
|------------|-----------|------------------------|-------|-------------|-----------------------------|---------|-----------|
| Stihl      | BR600     | Backpack blower        | N/A   | 64.8 CC Gas | 19.8 in / 14.9 in / 20.8 in | 21.6 lb | 115-2420  |
| Billy Goat | F1302H    | Walk-behind blower     | N/A   | 13 hp Gas   | 58 in / 28.5 in / 45 in     | 160 lb  | 115-2430  |
| Billy Goat | TKV650SPH | Lawn and litter vacuum | 27 in | 5.5 hp Gas  | 62 in / 26.75 in            | 141 lb  | 105-3800  |

## DETHATCHER

For heavy-duty turf renovation and remove thick thatch buildup.

### Features include:

- Powerful, versatile, fuel-efficient and technologically advanced

**RYAN**  
The #1 in Turf Renovation



| MAKE       | MODEL  | SIZE  | POWER      | DIMENSION (LWH)           | WEIGHT | CAT CLASS |
|------------|--------|-------|------------|---------------------------|--------|-----------|
| Ryan       | 554871 | 18 in | 4.8 hp Gas | 55.5 in / 27 in / 39 in   | 131 lb | 115-1770  |
| Billy Goat | PR550H | 20 in | 5.5 hp Gas | 45.5 in / 26.5 in / 39 in | 158 lb | 115-1770  |

## SOD CUTTERS

Ideal for landscapers, irrigation work, golf courses or for maintaining sports turf.

### Features include:

- Self-propelled technology and maximum traction wheels
- Laser clad cutting blade for precision cut and up to 3x blade life

**18 IN**  
CUTTING WIDTH



| MAKE       | MODEL   | SIZE  | POWER      | DIMENSION (LWH)           | WEIGHT | CAT CLASS |
|------------|---------|-------|------------|---------------------------|--------|-----------|
| Ryan       | 544952J | 18 in | 6.5 hp Gas | 53 in / 25 in / 40 in     | 373 lb | 115-1710  |
| Billy Goat | SC181H  | 18 in | 5.5 hp Gas | 59 in / 26.5 in / 36.5 in | 348 lb | 115-1710  |

## AERATORS

Designed to give lawns fresh air and the water and nutrients its roots need to flourish.

### Features include:

- Fold-n-Go™ handles make transport easy
- Self-propelled with easy-steer technology

**19-26 IN**  
WIDTH



| MAKE       | MODEL   | SIZE    | POWER      | DIMENSION (LWH)         | WEIGHT | CAT CLASS |
|------------|---------|---------|------------|-------------------------|--------|-----------|
| Ryan       | 554913C | 26.5 in | 3.5 hp Gas | 54 in / 36 in / 49 in   | 250 lb | 115-1810  |
| Billy Goat | AE401H  | 19 in   | 4 hp Gas   | 57 in / 29 in / 52.5 in | 242 lb | 115-1810  |

## LOG SPLITTERS

### Features include:

- Torsion axle suspension reduces bounce, improves tracking and towability when transporting
- Auto latch system for safe towing

**UP TO 25 IN**  
LOG DIAMETER



| MAKE       | MODEL       | FORCE  | SIZE  | POWER      | DIMENSION (LWH)       | WEIGHT | CAT CLASS |
|------------|-------------|--------|-------|------------|-----------------------|--------|-----------|
| Iron & Oak | BHVH3018GXT | 30 Ton | 25 in | 8.4 hp Gas | 94 in / 54 in / 46 in | 730 lb | 115-2900  |

## WOOD CHIPPERS

### Features include:

- Centrifugal clutch engagement prevents belt slip
- Large infeed opening makes it easier for operator to insert odd-shaped material inside the chipper, decreasing the number of saw cuts needed prior to feeding the chipper

**6-12 IN**  
CAPACITY



| MAKE    | MODEL    | SIZE  | POWER        | DIMENSION (LWH)        | WEIGHT   | CAT CLASS |
|---------|----------|-------|--------------|------------------------|----------|-----------|
| Barreto | E3107C-H | 7 in  | 24 hp Gas    | 120 in / 70 in / 88 in | 1,890 lb | 115-3510  |
| Bandit  | 12XPC    | 12 in | 74 hp Diesel | 194 in / 80 in / 98 in | 4,900 lb | 115-3540  |

# LIGHTING



Small Portable  
Hazardous Location  
Metal Halide Tow Behinds  
Engine Driven LED Towers  
Electric LED Light Towers  
Solar LED Towers





## SMALL PORTABLE LIGHTING



Illuminate large indoor or outdoor areas or provide spot lighting in confined spaces. LED lights are energy efficient and able to withstand tip overs and drops without bulb breakage.

### Features include:

- Floor stand, tripod mount or wheeled cart mounted
- Ability to “daisy chain” allows multiple lights to be powered by one 15 amp circuit
- Avoids burns and premature breakage as no heat is produced by the bulbs



| MAKE      | MODEL              | TYPE           | RANGE  | LIGHT TYPE        | LUMENS | POWER                | LIGHTS       | CAT CLASS |
|-----------|--------------------|----------------|--------|-------------------|--------|----------------------|--------------|-----------|
| LIND      | Beacon970          | Flood          | 50 ft  | Flood LED         | 5,000  | 110V                 | 50W LED      | 110-1550  |
| LIND      | Beacon360 GO       | 360 degree     | 25 ft  | Area LED          | 6,000  | Rechargeable battery | 45W LED      | 110-1577  |
| Probuilt  | WobbleLight V3     | Floor          | 35 ft  | Self-righting LED | 8,600  | 120V                 | 80W LED      | 110-1570  |
| LIND      | Beacon360 BLAZE    | 360 degree     | 50 ft  | Area LED          | 14,000 | 110V                 | 60W LED      | 110-1575  |
| LIND      | Beacon980-CART-W   | Dual head cart | 240 ft | Flood LED         | 60,000 | 110V                 | (2) 200W LED | 110-1555  |
| Powermoon | PL600LED           | Diffused       | 30 ft  | Balloon LED       | 75,000 | 110V                 | 600W LED     | 110-1580  |
| LIND      | LE360LEDS-10PI0C   | String         | 20 ft  | Bulb LED          | 2,400  | 120V                 | 20W LED      | 913-5205  |
| LIND      | LE360LED-25P25C    | String         | 50 ft  | Lamp LED          | 14,300 | 120V                 | 100W LED     | 913-5206  |
| LIND      | LE-HB120LED-25P25C | High bay       | 50 ft  | Lamp LED          | 15,250 | 120V                 | 120W LED     | 913-5208  |

## HAZARDOUS LOCATION LIGHTING



Explosion-proof lights are designed and approved to be used in hazardous locations by incorporating incandescent, explosion-proof hand lamps into sturdy t-drops and cable.

### Features include:

- Stringlights are 50-feet long and feature lights every 10 feet
- Interchangeable anti-glare diffusers
- Thermal temperatures rated at T5



| MAKE | MODEL           | TYPE                               | VOLTAGE | LUMENS   | APPROVALS  | CAT CLASS |
|------|-----------------|------------------------------------|---------|----------|--|-----------|
| LIND | XP65LED-50P     | LED Tubular Inspection Light       | 120V    | 1x250    | cULus Certified for Class I, Division 1, Group D. Class II, Division 1, Group G                | 110-2043  |
| LIND | TLS80XPLEDRE-LV | Low Voltage String Light 80 ft LED | 12V     | 8x800    | cQPSus listed for Class I, Division 1, Groups C & D hazardous locations (CSA and UL standards) | 110-2055  |
| LIND | XP162LED-50P    | Hand Lamp LED 50 ft Cord           | 120V    | 1x800    | cULus Certified for Class I, Division 1, Group D. Class II, Division 1, Group G                | 110-2000  |
| LIND | XP980LED        | LED Flood Light                    | 110V    | 1x24,000 | Class I, Division 1, Groups B,C & D, Class II, Groups E,F & G                                  | 110-2049  |

## METAL HALIDE LIGHT TOWERS

### Features include:

- Kubota diesel engine
- Tow behind
- Ideal for construction, road projects, parking lot security, and nighttime events

**UP TO 246,300 LUMENS**

**UP TO 90 HR MAX RUN TIME**

**GENERAC MOBILE**



| MAKE           | MODEL  | TYPE    | MAST HEIGHT | MAST TYPE | GENERATOR | POWER  | LIGHTS     | RUN TIME  | FUEL BURN | WIND SPEED RATING | CAT CLASS |
|----------------|--------|---------|-------------|-----------|-----------|--------|------------|-----------|-----------|-------------------|-----------|
| Generac Mobile | MLT6SK | Towable | 23 ft       | Vertical  | 6 kW      | Diesel | (4) 1,050W | 90 hr max | .42 gph   | 65 mph            | 510-1030  |

# Modern Lighting Solutions

Longer run times, reduced emissions and maximized efficiency. Modern lighting solutions are all about keeping you working safely and effectively night or day.



**Dusk to Dawn Sensor**

Automatically turns the light tower on or off based on the amount of ambient light detected.



**Shore Power**

Allows a light tower to be plugged into a wall or generator.



**Digital Controller**

Maximizes efficiency by enabling a light tower to be automatically turned on or off based on predetermined time parameters.



**4-Way Forklift Pockets**

Quick and easy maneuvering and mobility.



**Daisy Chain**

Link multiple light towers in a sequence and power from a single source.



**110% Contained**

Double walled and built in weather proof containment. No need for pans or basins.



**City Silent**

Designed to be used in sensitive work environments where noise pollution must be kept to a minimum.



**ECOCLEAN**

Environmentally-friendly product.


## Add a fuel tank for extended run times.



**CUBE+ HYPER**  
Run Time: 300 Hours



**ADD a Fuel Tank to EXTEND Run Times.**

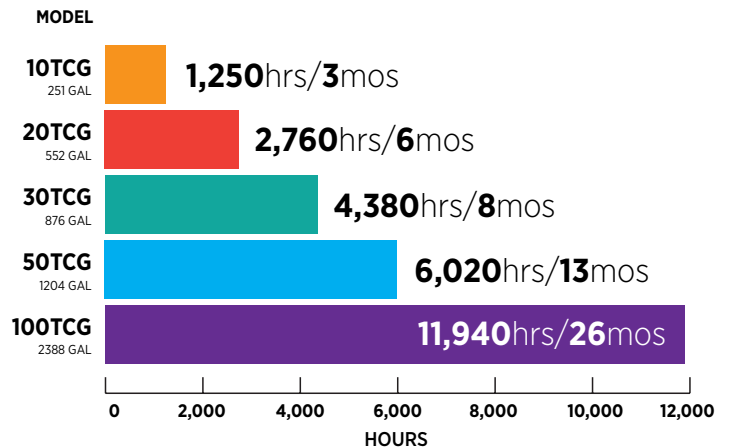

## ENGINE DRIVEN LED TOWERS



### Features include:

- Durable and reliable with easy set-up and operation
- Ability to link two light towers together provides even more illumination
- Efficient engine reduces fuel consumption by 60% vs traditional metal halide light towers
- Built in double-walled spill containment

**GENERAC** MOBILE



**UP TO 184,000 LUMENS**

**UP TO 300 HR MAX RUN TIME**



| MAKE           | MODEL       | TYPE    | MAST HEIGHT | GENERATOR | POWER  | LIGHTS   | RUN TIME | FUEL BURN | WIND SPEED RATING | CAT CLASS |
|----------------|-------------|---------|-------------|-----------|--------|----------|----------|-----------|-------------------|-----------|
| Generac Mobile | G4 ECO2     | Towable | 23 ft       | 4 KW      | Diesel | (4) 320W | 212 hr   | .20 gph   | 68 mph            | 510-1055  |
| Generac Mobile | G4 ECO      | Towable | 26 ft       | 4 KW      | Diesel | (4) 320W | 205 hr   | .20 gph   | 68 mph            | 510-1055  |
| Generac Mobile | Cube+ Hyper | Skid    | 27.5 ft     | 4 KW      | Diesel | (4) 320W | 300 hr   | .20 gph   | 50 mph            | 510-1160  |

## ELECTRIC LED LINK-TOWERS



### Features include:

- Stabilizing outriggers enable towers to withstand windy conditions
- Ideal for construction, outdoor events, sports venues, increased parking lot security, and more

**GENERAC** MOBILE



**UP TO 154,000 LUMENS**


**UNLIMITED RUN TIME**



| MAKE           | MODEL                          | TYPE        | MAST HEIGHT | POWER        | LIGHTS   | RUN TIME  | FUEL BURN | WIND SPEED RATING | CAT CLASS |
|----------------|--------------------------------|-------------|-------------|--------------|----------|-----------|-----------|-------------------|-----------|
| Generac Mobile | Link-Tower PLT240              | Manual push | 16 ft       | 120V/15A-20A | (4) 240W | Unlimited | 0 gph     | 45 mph            | 510-1080  |
| Allmand        | Link-Tower Night-Lite E-Series | Manual push | 23 ft       | 115V/15A     | (4) 250W | Unlimited | 0 gph     | 50 mph            | 510-1082  |
| Allmand        | Link-Tower Mobile              | Towable     | 23 ft       | 120V/15A-20A | (4) 250W | Unlimited | 0 gph     | 50 mph            | 510-1084  |



## Control your light towers from any device, anywhere

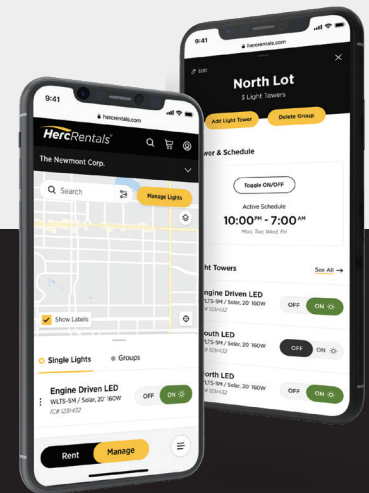

- Turn light towers on or off from anywhere
- Enhanced safety measures and alerts when turning towers on or off
- Reduce labor costs
- Create schedules and groups
- Set up and manage alerts
- Added security to protect job site
- View power status and schedules by single lights or groups
- Activate or deactivate schedules on demand

Learn more at [HercRentals.com](https://www.herc.com)

**ProControl**  
NextGen™

# SOLAR LED TOWERS



## Features include:

- Stabilizing outriggers enable towers to withstand windy conditions
- Ideal for construction, outdoor events, sports venues, increased parking lot security, and more







**UP TO 104,800 LUMENS**

**UNLIMITED RUN TIME**




| MAKE     | MODEL     | MAST HEIGHT | BATTERY CAPACITY | POWER                                    | LIGHTS   | RUN TIME  | FUEL BURN | WIND SPEED RATING | CAT CLASS |
|----------|-----------|-------------|------------------|--|----------|-----------|-----------|-------------------|-----------|
| National | EventLite | 17 ft       | N/A Built-in     | (2) 70W Monocrystalline Solar Collectors | (2) 25W  | Unlimited | 0 gph     | 65 mph            | 510-1010  |
| National | LTS 160   | 20 ft       | 660A hr          | 1,000W Solar Array or 115V/15-20a        | (4) 160W | Unlimited | 0 gph     | 60 mph            | 510-1015  |
| Wanco    | WLTS-SM   | 20 ft       | 400A hr          | 600W Solar Array or 120V/20a             | (4) 50W  | Unlimited | 0 gph     | 60 mph            | 510-1020  |

## SOLAR PERFORMANCE GUIDE

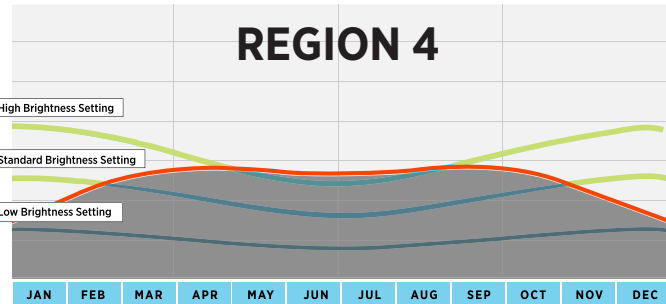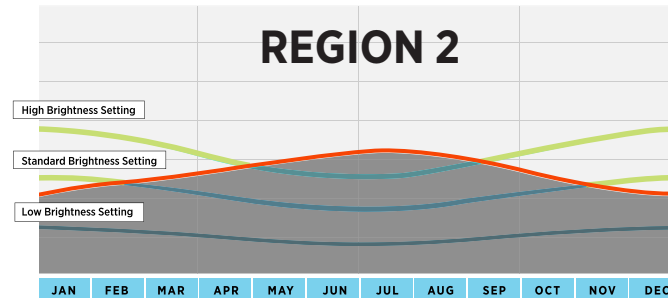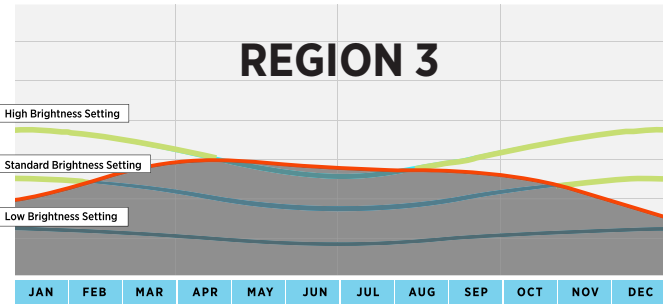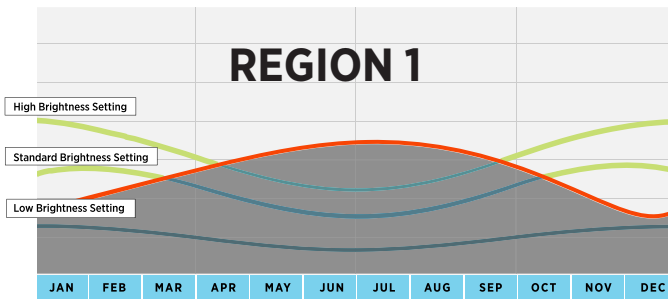

|                           |                      |                   |
|---------------------------|----------------------|-------------------|
| AVAILABLE DAILY SUN HOURS | NO CHARGING REQUIRED | REQUIRES CHARGING |
|---------------------------|----------------------|-------------------|

\*Runtimes may vary based on brightness settings, sun exposure and usage.

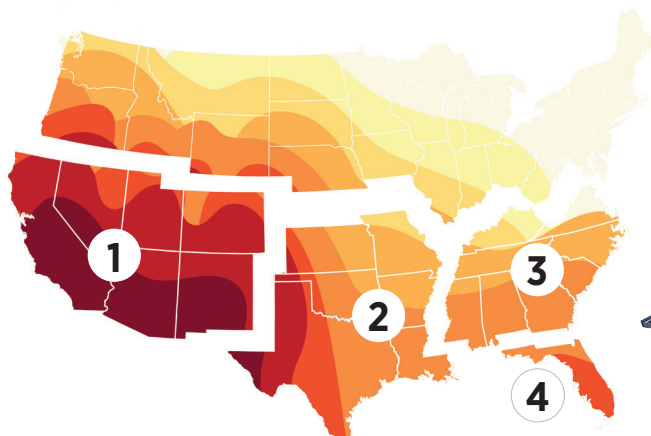

## NATIONAL SIGNAL LTS 160 SOLAR TOWER

\*Calculated run times on full charge with no additional charge

| RUN TIME | BRIGHTNESS |
|----------|------------|
| 23 Hr    | High       |
| 34 Hr    | Medium     |
| 68 Hr    | Low        |










# LIGHTING PERFORMANCE CHART


With the advances in lighting technology, the new generation of LED light towers will match or beat the brightness of a traditional 1,000-watt metal-halide light tower at a reduced operating cost.

50%+ reduction in energy usage/fuel consumption  
 Extend run times up to 300%  
 Instant on/off

Reduced heat  
 No bulb-changing  
 Digital controller for increased efficiency

|                              | METAL HALIDE  |   | LED LIGHT TOWERS  |   |  |   |   |
|------------------------------|---|---|---|---|--|---|---|
|                              |  |  |  |  |  |  |  |
| MAKE/MODEL                   | GENERAC MLT6SK  | GENERAC G4 ECO2   | GENERAC CUBE+ HYPER   | GENERAC PLT240  | ALLMAND NIGHT-LITE E-SERIES  | WANCO WLTS-SM   | NATIONAL SIGNAL LTS 160   |
| LUMENS                       | 246,300   | 188,000   | 184,000   | 88,000  | 154,000  | 20,100  | 104,800   |
| FUEL CONSUMPTION PER HOUR    | 0.42 gal  | 0.20 gal  | 0.20 gal  | 0 gal   | 0 gal  | 0 gal   | 0 gal   |
| DIESEL PRICE PER GALLON AVG. | \$5.27  | \$5.27  | \$5.27  | n/a   | n/a  | n/a   | n/a   |
| FUEL COST PER HOUR           | \$2.21  | \$1.05  | \$1.05  | \$0.10  | \$0.13   | \$0   | \$0   |
| RUN HOURS PER SHIFT          | 10  | 10  | 10  | 10  | 10   | 10  | 10  |
| OPERATING COST PER MONTH*    | <b>\$442</b>  | <b>\$210</b>  | <b>\$210</b>  | <b>\$20</b>   | <b>\$26</b>  | <b>\$0</b>  | <b>\$0</b>  |
| MAX RUN TIME                 | <b>90 Hours</b>   | <b>212 Hours</b>  | <b>300 Hours</b>  | <b>Unlimited</b>  | <b>Unlimited</b>   | <b>Unlimited</b>  | <b>Unlimited</b>  |

\*10 hour shifts per day x 20 workdays per month

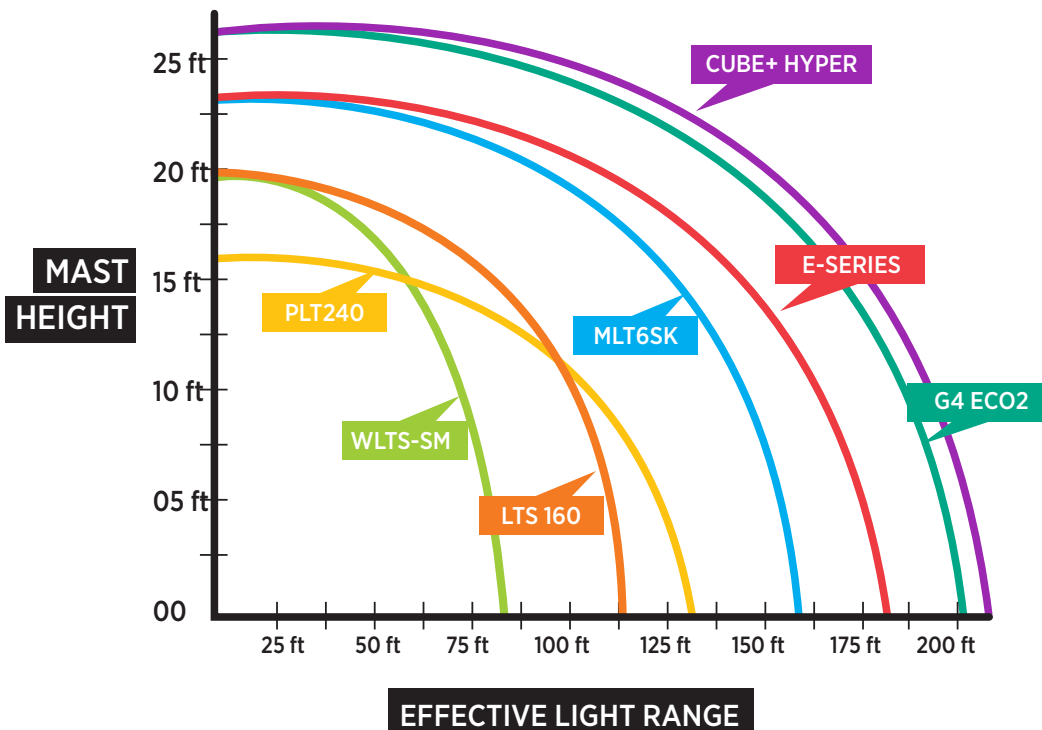



# MATERIAL HANDLING



Pallet Jacks  
Walkie Stackers  
Stand-up Rider Forklifts  
Electric Forklifts  
Standard Capacity Forklifts  
High Capacity Forklifts

Telehandlers  
Rough Terrain Forklifts  
Hand Trucks and Dollies  
Material Lifts  
Gantry Cranes  
Jacks and Cylinders

Chain Hoists  
Portable Conveyors  
Glass Lifts  
Crawler Cranes  
Pick and Carry Cranes  
Carry Deck Cranes

# QUICK REFERENCE GUIDE

|                     |  | Ground level transport only | Lifting and stacking | Order picking | Indoor use | Outdoor and uneven surface | Electric |
|---------------------|--|-----------------------------|----------------------|---------------|------------|----------------------------|----------|
| WAREHOUSE FORKLIFTS | 3,000 LB PNEU DF<br>8FGU15 / CC 450-2020           |                             |                      |               |            |                            |          |
|                     | 4,000 LB 3W SIT ELEC<br>8FBE20U / CC 450-2090      |                             |                      |               |            |                            |          |
|                     | 5,000 LB PNEU DF<br>8FGU25 / CC 450-2120           |                             |                      |               |            |                            |          |
|                     | 5,000 LB CUSHION ELEC<br>8FBCU25 / CC 450-2140     |                             |                      |               |            |                            |          |
|                     | 5,000 LB LOWPRO PNEU DF<br>8FGU25LOW / CC 450-2160 |                             |                      |               |            |                            |          |
|                     | 6,000 LB 4MAST PNEU DF<br>8FGU30 / CC 450-2240     |                             |                      |               |            |                            |          |
|                     | 8,000 LB PNEU DSL<br>8FD35U / CC 450-2260          |                             |                      |               |            |                            |          |
|                     | 8,000 LB PNEU DF<br>8FG35U / CCS 450-2270          |                             |                      |               |            |                            |          |
|                     | 10,000 LB PNEU DF<br>8FG45U / CC 450-2320          |                             |                      |               |            |                            |          |
|                     | 10,000 LB PNEU DSL<br>8FD45U / CC 450-2310         |                             |                      |               |            |                            |          |
|                     | 15,500 LB PNEU DSL<br>8FD70U / CC 450-2370         |                             |                      |               |            |                            |          |
|                     | 26,000 LB PNEU DSL<br>THD2600-24 / CC 450-2430     |                             |                      |               |            |                            |          |
|                     | 36,000 LB PNEU DSL<br>THD3600-24 / CC 450-2450     |                             |                      |               |            |                            |          |
| WALKIE STACKERS     | 3,000 LB COUNT ELEC<br>6BWC15 / CC 480-1230        |                             |                      |               |            |                            |          |
|                     | 2,500 LB STRADDLE ELEC<br>8BWS13 / CC 480-1224     |                             |                      |               |            |                            |          |
|                     | 4,000 LB COUNT ELEC<br>6BWC20 / CC 480-1240        |                             |                      |               |            |                            |          |
|                     | 4,000 LB STRADDLE ELEC<br>6BWS20 / CC 480-1239     |                             |                      |               |            |                            |          |
| WALKIE LIFT         | 6,000 LB ELEC<br>8HBE30 / CC 480-1280              |                             |                      |               |            |                            |          |
|                     | 4,500 LB ELEC<br>8HBW23 / CC 480-1260              |                             |                      |               |            |                            |          |

## PALLET JACKS

Built tough for industrial conditions, resistant to damage and spills and perfect for retail and warehouse receiving operations.

### Features include:

- Up to 48-inch fork lengths
- Max fork heights from 7.5-inches to 31.5 inches

**UP TO 8,000 LB**  
LOAD CAPACITY



| MAKE   | MODEL  | TYPE                 | FORK LENGTH | LOAD CAPACITY | MAX FORK HEIGHT | POWER TYPE   | DIMENSIONS (LWH)            | WEIGHT | CAT-CLASS |
|--------|--------|----------------------|-------------|---------------|-----------------|--------------|-----------------------------|--------|-----------|
| Dayton | 2ZE57  | Pallet jack          | 48 in       | 5,500 lb      | 7.5 in          | Manual       | 63 in / 27 in / 48 in       | 185 lb | 480-1135  |
| Dayton | 2ZE58  | Narrow pallet jack   | 48 in       | 5,500 lb      | 7.75 in         | Manual       | 61-7/8 in / 20.5 in / 48 in | 180 lb | 480-1130  |
| Dayton | 2ZE60  | Pallet jack          | 48 in       | 8,000 lb      | 7.5 in          | Manual       | 63 in / 37 in / 48 in       | 180 lb | 480-1140  |
| Toyota | 8HBW23 | Electric pallet jack | 48 in       | 4,500 lb      |                 | Electric 24V | 71.9 in / 28 in / 47.2 in   |        | 480-1260  |

## WALKIE STACKERS



Designed to take on the most demanding warehouse applications.

### Features and Applications include:

- AC drive with 110V plug-in onboard charger
- Ideal for retail store back rooms, manufacturing and dock to stock applications.

**UP TO 6,000 LB**  
LOAD CAPACITY

**TOYOTA**



| MAKE   | MODEL  | LOAD CAPACITY | FORK LENGTH | OPERATING WEIGHT W/ BATTERY | FLOOR LOAD W/ MAX CAPACITY*                          | TRAVEL SPEED W/ FULL LOAD | POWER TYPE   | MINIMUM AISLE WIDTH | DIMENSIONS (LWH)*          | CAT-CLASS |
|--------|--------|---------------|-------------|-----------------------------|--|---------------------------|--------------|---------------------|----------------------------|-----------|
| Toyota | 8BWS13 | 2,500 lb      | 42 in       | 2,210 lb                    | Front wheel 226 psi per wheel (2) rear wheel 858 psi | 3.4 mph                   | Electric 24V | 7 ft                | 61.3 in / 28 in / 72 in    | 480-1224  |
| Toyota | 6BWS20 | 4,000 lb      | 42 in       | 3,809 lb                    | Front wheel 536 psi per wheel (2) rear wheel 235 psi | 2.6 mph                   | Electric 24V | 7 ft                | 89.9 in / 34.1 in / 71 in  | 480-1239  |
| Toyota | 6BWC20 | 4,000 lb      | 42 in       | 6,400 lb                    | Front wheel 130 psi per wheel (2) rear wheel 352 psi | 2.8 mph                   | Electric 24V | 10 ft               | 76.6 in / 34.1 in / 71 in  | 480-1240  |
| Toyota | 8HBE30 | 6,000 lb      | 48 in       | 2,734 lb                    | Front wheel 154 psi per wheel (2) rear wheel 171 psi | 8.8 mph                   | Electric 24V | 85 ft               | 90.4 in / 36 in / 56.7 in  | 480-1280  |
| Toyota | 8HBE30 | 6,000 lb      | 96 in       | 2,910 lb                    | Front wheel 157 psi per wheel (2) rear wheel 174 psi | 8.8 mph                   | Electric 24V | 142 ft              | 138.8 in / 36 in / 56.7 in | 480-1282  |

\*Dimensions to fork face

## STAND-UP RIDER FORKLIFTS



Versatile and slender, these stand-up forklifts are designed to navigate narrow aisles while maintaining the strength to lift, stack and place items.

### Features include:

- High-visibility mast and overhead guard, dual electric disc brakes and cornering speed control
- Short term and long term charging options

**UP TO 4,000 LB**  
LOAD CAPACITY

**TOYOTA**



\*Dimensions to fork face

| MAKE   | MODEL   | LOAD CAPACITY | FORK LENGTH | MAX FORK HEIGHT | MAX LOWERED HEIGHT | OPERATING WEIGHT W/ BATTERY | TRAVEL SPEED W/ FULL LOAD | POWER TYPE   | MIN AISLE WIDTH | DIMENSIONS W/ FORKS (LWH) | DIMENSIONS (LWH)*       | CAT-CLASS |
|--------|---------|---------------|-------------|-----------------|--------------------|-----------------------------|---------------------------|--------------|-----------------|---------------------------|-------------------------|-----------|
| Toyota | 8BNCU18 | 3,500 lb      | 42 in       | 188 in          | 83 in              | 8,677 lb                    | 7.5 mph                   | Electric 36V | 10 ft           | 110.5 in / 41 in / 88 in  | 68.5 in / 41 in / 88 in | 450-2055  |
| Toyota | 8BNCU20 | 4,000 lb      | 42 in       | 188 in          | 83 in              | 9,200 lb                    | 7.5 mph                   | Electric 36V | 10 ft           | 112.5 in / 41 in / 88 in  | 70.5 in / 41 in / 88 in | 450-2057  |



## ELECTRIC INDUSTRIAL FORKLIFTS



### Features include:

- Exclusive System of Active Stability™ enhances operator safety
- Available with non-marking tires
- Short term or long term charging options on most models
- Attachments available

**UP TO 5,000 LB**  
LOAD CAPACITY

**UP TO 189 IN**  
MAX FORK HEIGHT

**TOYOTA**



| MAKE   | MODEL   | LOAD CAPACITY | FORK LENGTH | MAX FORK HEIGHT     | MAX LOWERED HEIGHT | OPERATING WEIGHT W/ BATTERY | FLOOR LOAD W/ MAX CAPACITY*                          | TRAVEL SPEED W/ FULL LOAD | POWER | MIN AISLE WIDTH | DIMENSIONS (LWH)*           | CAT-CLASS |
|--------|---------|---------------|-------------|---------------------|--------------------|-----------------------------|--|---------------------------|-------|-----------------|-----------------------------|-----------|
| Toyota | 8FBE20U | 4,000 lb      | 42 in       | 189 in 3 stage mast | 83.5 in            | 7,420 lb                    | Front wheel 179 psi per wheel (2) rear wheel 87 psi  | 9.7 mph                   | 48V   | 11 ft           | 77.2 in / 41.5 in / 83.5 in | 450-2090  |
| Toyota | 8FBCU25 | 5,000 lb      | 42 in       | 189 in 3 stage mast | 83.3 in            | 9,759 lb                    | Front wheel 161 psi per wheel (2) rear wheel 114 psi | 11.5 mph                  | 48V   | 12 ft           | 84.5 in / 41.9 in / 88 in   | 450-2140  |

## ELECTRIC FORKLIFT BATTERY CHARGER GUIDE

| EQUIPMENT MODEL | WATERING INTERVAL | CHARGER TYPE  | SHORT TERM RENTAL CHARGER (MAXIMUM 2 WEEK RENTALS) | CAT-CLASS | LONG TERM RENTAL CHARGER (3+ WEEKS AND LONGER) | CAT-CLASS |
|-----------------|-------------------|---------------|--|-----------|--|-----------|
| 8HBW23          | None              | Built In 120V | Use on-board charger                               | N/A       | Use on-board charger                           | N/A       |
| 8HBE30          | 90 Days           | Built In 120V | Use on-board charger                               | N/A       | Use on-board charger                           | N/A       |
| 8BWS13          | None              | Built In 120V | Use on-board charger                               | N/A       | Use on-board charger                           | N/A       |
| 6BWS20          | 90 Days           | Built In 120V | Use on-board charger                               | N/A       | Use on-board charger                           | N/A       |
| 6BWC20          | 90 Days           | Built In 120V | Use on-board charger                               | N/A       | Use on-board charger                           | N/A       |
| 8FBE20U         | 90 Days           | External      | EHIMV48S140 110V Plug-in                           | 490-1690  | EHIMV80M200 208-240/480V 3PH                   | 490-1695  |
| 8FBCU25         | 90 Days           | External      | EHIMV48S140 110V Plug-in                           | 490-1690  | EHIMV80M200 208-240/480V 3PH                   | 490-1695  |
| 8FBM25T         | 90 Days           | External      | EHIMV80M250 208-240/480V 3PH                       | 490-1695  | EHIMV80M250 208-240/480V 3PH                   | 490-1695  |

## LP INDUSTRIAL FORKLIFTS

### Features include:

- Standard or low profile overall height
- Operates on liquid propane
- Solid pneumatic non-marking tires

**UP TO 6,000 LB**  
LOAD CAPACITY

**UP TO 240 IN**  
MAX FORK HEIGHT

**TOYOTA**



| MAKE   | MODEL            | LOAD CAPACITY | FORK LENGTH | MAX FORK HEIGHT     | MAX LOWERED HEIGHT | OPERATING WEIGHT W/ BATTERY | FLOOR LOAD W/ MAX CAPACITY*                         | TRAVEL SPEED W/ FULL LOAD | POWER | MIN AISLE WIDTH | DIMENSIONS (LWH)*            | CAT-CLASS |
|--------|------------------|---------------|-------------|---------------------|--------------------|-----------------------------|---|---------------------------|-------|-----------------|------------------------------|-----------|
| Toyota | 50-8FGU25        | 5,000 lb      | 42 in       | 189 in 3 stage mast | 84.5 in            | 7,840 lb                    | Front wheel 160 psi per wheel (2) rear wheel 87 psi | 10.9 mph                  | LP    | 13 ft           | 104.7 in / 45.3 in / 84.5 in | 450-2122  |
| Toyota | 50-8FGU25 LOWPRO | 5,000 lb      | 42 in       | 189 in 3 stage mast | 84.5 in            | 7,640 lb                    | Front wheel 160 psi per wheel (2) rear wheel 99 psi | 10.9 mph                  | LP    | 13 ft           | 104.7 in / 45.3 in / 79.1 in | 450-2165  |
| Toyota | 50-8FGU30        | 6,000 lb      | 42 in       | 240 in 4 stage mast | 84.8 in            | 10,850                      | Front wheel 160 psi per wheel (2) rear wheel 87 psi | 11.2 mph                  | LP    | 13.5 ft         | 110.5 in / 48.8 in / 85.5 in | 450-2242  |

\*Dimensions to fork face

## STANDARD CAPACITY INTERNAL COMBUSTION FORKLIFTS

### Features include:

- Standard or low profile overall height
- Operates on gasoline or liquid propane
- Solid pneumatic non-marking tires

**UP TO 5,000 LB**  
LOAD CAPACITY

**UP TO 189 IN**  
MAX FORK HEIGHT

**TOYOTA**

8FGU25 LOW  
LOW PROFILE  
79.1 CLEARANCE



| MAKE   | MODEL         | LOAD CAPACITY | FORK LENGTH | MAX FORK HEIGHT     | MAST LOWERED HEIGHT | OPERATING WEIGHT | FLOOR LOAD W/ MAX CAPACITY**                         | TRAVEL SPEED W/ FULL LOAD | POWER TYPE            | MIN AISLE WIDTH | DIMENSIONS (LWH)*            | CAT-CLASS |
|--------|---------------|---------------|-------------|---------------------|---------------------|------------------|--|---------------------------|-----------------------|-----------------|------------------------------|-----------|
| Toyota | 8FGU15        | 3,000 lb      | 42 in       | 189 in 3 stage mast | 84.4 in             | 5,500 lb         | Front wheel 174 psi per wheel (2) rear wheel 105 psi | 11.5 mph                  | Dual fuel - Gas or LP | 11 ft           | 88.6 in / 42.1 in / 84.4 in  | 450-2020  |
| Toyota | 8FGU25        | 5,000 lb      | 42 in       | 189 in 3 stage mast | 84.5 in             | 7,840 lb         | Front wheel 160 psi per wheel (2) rear wheel 99 psi  | 10.9 mph                  | Dual fuel - Gas or LP | 13 ft           | 104.7 in / 45.3 in / 84.5 in | 450-2120  |
| Toyota | 8FGU25 LOWPRO | 5,000 lb      | 42 in       | 170 in 3 stage mast | 78.5 in             | 7,840 lb         | Front wheel 160 psi per wheel (2) rear wheel 99 psi  | 10.9 mph                  | Dual fuel - Gas or LP | 13 ft           | 104.7 in / 45.3 in / 79.1 in | 450-2160  |
| Toyota | 8FDU25        | 5,000 lb      | 42 in       | 189 in 3 stage mast | 84.5 in             | 7,990 lb         | Front wheel 160 psi per wheel (2) rear wheel 99 psi  | 10.7 mph                  | Diesel                | 13 ft           | 104.7 in / 45.3 in / 84.5 in | 450-2110  |

## MID CAPACITY INTERNAL COMBUSTION FORKLIFTS

Designed for long days on construction sites, the lumber yard and many other outdoor applications.

### Features include:

- Dash-mounted instrument display
- Fork positioners available on most models
- Available in fork lengths
- System of Active Stability™

**UP TO 10,000 LB**  
LOAD CAPACITY

**UP TO 240 IN**  
MAX FORK HEIGHT

**TOYOTA**




| MAKE   | MODEL  | LOAD CAPACITY | FORK LENGTH | MAX FORK HEIGHT     | MAST LOWERED HEIGHT | OPERATING WEIGHT | TRAVEL SPEED W/ FULL LOAD | POWER TYPE            | MIN AISLE WIDTH | DIMENSIONS (LWH)*            | CAT-CLASS |
|--------|--------|---------------|-------------|---------------------|---------------------|------------------|---------------------------|-----------------------|-----------------|------------------------------|-----------|
| Toyota | 8FDU30 | 6,000 lb      | 42 in       | 187 in 3 stage mast | 84.5 in             | 10,990 lb        | 10.7 mph                  | Diesel                | 13.5 ft         | 110.5 in / 48.8 in / 85.5 in | 450-2180  |
| Toyota | 8FGU30 | 6,000 lb      | 42 in       | 240 in 4 stage mast | 84.8 in             | 10,850 lb        | 11.2 mph                  | Dual fuel - Gas or LP | 13.5 ft         | 110.5 in / 48.8 in / 85.5 in | 450-2240  |
| Toyota | 8FD35U | 8,000 lb      | 42 in       | 187 in 3 stage mast | 90.2 in             | 12,820 lb        | 13.1 mph                  | Diesel                | 14 ft           | 116.3 in / 53.1 in / 90.2 in | 450-2260  |
| Toyota | 8FG35U | 8,000 lb      | 42 in       | 187 in 3 stage mast | 90.2 in             | 12,640 lb        | 13.7 mph                  | Dual fuel - Gas or LP | 14 ft           | 116.3 in / 53.1 in / 90.2 in | 450-2270  |
| Toyota | 8FG45U | 10,000 lb     | 60 in       | 187 in 3 stage mast | 92.5 in             | 14,650 lb        | 13.7 mph                  | Dual fuel - Gas or LP | 16 ft           | 123.6 in / 57.1 in / 92.5 in | 450-2320  |
| Toyota | 8FD45U | 10,000 lb     | 60 in       | 187 in 3 stage mast | 92.5 in             | 14,650 lb        | 13.1 mph                  | Diesel                | 16 ft           | 123.6 in / 57.1 in / 92.5 in | 450-2310  |

**Get the app**



Search and filter for better results

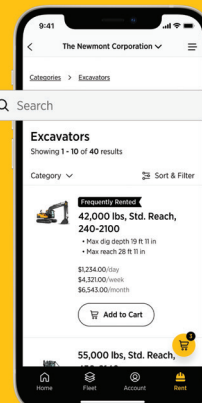

Product details under your thumb



## HIGH CAPACITY INTERNAL COMBUSTION FORKLIFTS

Built to conquer extremely heavy applications, ranging from lifting and moving large items such as shipping containers, oversize boats, steel, lumber and concrete on construction sites.

### Features include:

- Solid pneumatic tires
- Non-marking tires available
- Propane option for 15k models
- Deluxe cab with AC on 26-55k models

**UP TO 36,000 LB**  
LOAD CAPACITY

**UP TO 187 IN**  
MAX FORK HEIGHT  
**TOYOTA**



| MAKE   | MODEL      | LOAD CAPACITY | FORK LENGTH | MAX FORK HEIGHT     | MAST LOWERED HEIGHT | OPERATING WEIGHT | TRAVEL SPEED W/ FULL LOAD | POWER TYPE                  | MIN AISLE WIDTH | DIMENSIONS (LWH)              | CAT-CLASS |
|--------|------------|---------------|-------------|---------------------|---------------------|------------------|---------------------------|-----------------------------|-----------------|-------------------------------|-----------|
| Toyota | 8FD70U     | 15,500 lb     | 72 in       | 187 in 3 stage mast | 100.4 in            | 19,980 lb        | 11.8 mph                  | 74 hp Diesel                | 19 ft           | 140.9 in / 77.5 in / 100.4 in | 450-2370  |
| Toyota | 8FG70U     | 15,500 lb     | 72 in       | 187 in 3 stage mast | 100.4 in            | 20,490 lb        | 11.8 mph                  | 74 hp Dual fuel - Gas or LP | 19 ft           | 140.9 in / 77.4 in / 94.5 in  | 450-2380  |
| Toyota | THD2600-24 | 26,000 lb     | 96 in       | 144 in 2 stage mast | 142 in              | 44,140 lb        | 20 mph                    | 160 hp Diesel               | 26 ft           | 185.9 in / 103 in / 142 in    | 450-2435  |
| Toyota | THD3600-24 | 36,000 lb     | 96 in       | 144 in 2 stage mast | 142 in              | 46,981 lb        | 20 mph                    | 160 hp Diesel               | 26 ft           | 211 in / 103 in / 142 in      | 450-2455  |

\*Dimensions to fork face


## FORKLIFT ATTACHMENTS

| TYPE                        | MODEL       | DESCRIPTION             | CAT-CLASS |
|-----------------------------|-------------|-------------------------|-----------|
| Lift Hook                   | 1371B       | 12,000 lb Lift Capacity | 490-1000  |
| Lift Hook and Trailer Hitch | 1390B       | 10,000 lb Tow Capacity  | 490-1004  |
| Carpet Pole                 | 5020-12     | 12 ft carpet pole       | 490-1030  |
| Dumping Hopper              | 1820        | 2 Yard Bin Dumper       | 490-1215  |
| Jib Hoist                   | 1360B       | 6,000 lb Lift Capacity  | 490-1020  |
| Fork Rotator                | 55G-RRB-30B | 4,500 lb Capacity       | 490-1079  |
| Truss Boom                  | 1302        | 10,000 lb Lift Capacity | 490-1010  |


**HercRentals®**

**We'll give you the tools...  
you provide the talent**

Learn more at  
[careers.hercrentals.com](https://careers.hercrentals.com)

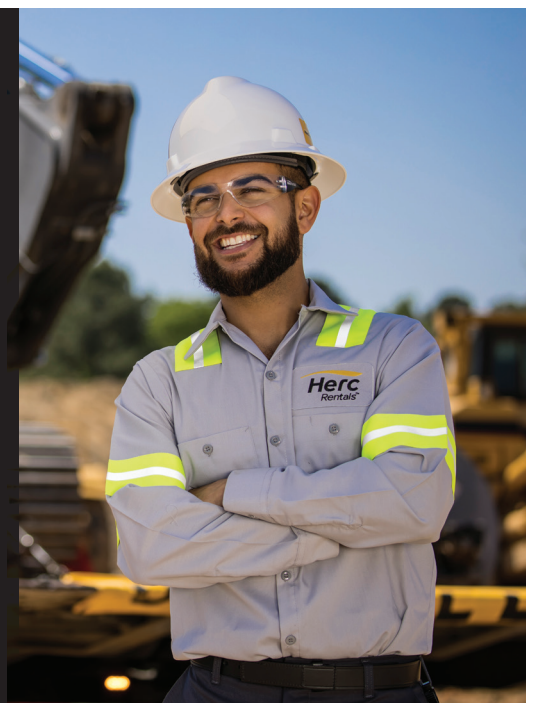

# TELEHANDLER LOAD CHART

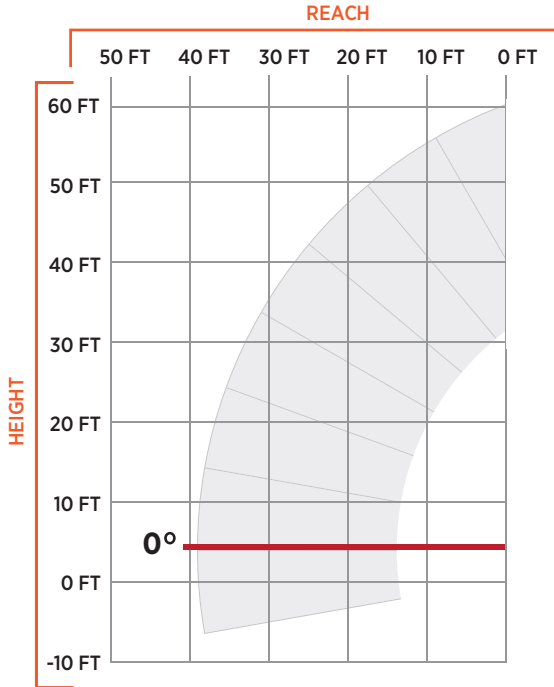

10,000 LB TELEHANDLERS

## Compare the 42 FT to the 54 FT

LIFT HEIGHT



| MODEL | CAT-CLASS | LOAD WEIGHT | OUTRIGGERS UP | OUTRIGGERS DOWN |
|-------|-----------|-------------|---------------|-----------------|
| 10042 | 460-1060  | 6,000 LB    | UP TO 42 FT   | UP TO 42 FT     |
|       |           | 8,000 LB    | UP TO 37 FT   | UP TO 37 FT     |
| 10054 | 460-1070  | 6,000 LB    | UP TO 37 FT   | UP TO 37 FT     |
|       |           | 8,000 LB    | UP TO 21 FT   | UP TO 21 FT     |

CAPACITY AT MAX LIFT HEIGHT

**42 FT = 6,000 LB**  
**54 FT = 4,000 LB**

Outriggers Down

CAPACITY AT MAX REACH

**26 FT = 6,000 LB**  
**39 FT = 3,000 LB**

Outriggers Down

If total load is:  
**8,000 LB**

### 42 FT

Telehandler can lift up to **37 FT** with the Outriggers Up or Down

### 54 FT

Telehandler can lift up to **21 FT** with the Outriggers Up or Down

Always refer to OEM's operations manual load charts for your specific application.

Rated lift capacities are shown for telehandlers equipped with carriage and pallet forks.

Using other methods for lifting such as chains, jibs, slings, etc., will change and alter lift capacities. Follow OSHA approved lifting methods including standard rigging safety guidelines.

Suspended loads should never be attached to chains or slings over the fork carriage.

Be sure to look at the telehandlers' load chart that corresponds with the attachment being used before starting the work.

Generally, fork carriage load charts are based on a horizontal load center that is 24 inches from the front vertical surface of the fork area.

## Factors That Change The Load Capacity

- Carriage Type
- Vertical Lift Height
- Horizontal Reach Length
- Boom Angle



## TELEHANDLERS

Telehandler forklifts are designed for uses in construction, masonry and agriculture.

### Features include:

- Tight turn radius
- Towing
- 4WD and 4WD steering
- Higher ground clearance

**UP TO 20,000 LB**  
MAX LOAD CAPACITY

**UP TO 56 FT**  
MAX LIFT HEIGHT

**SKYJACK** simply reliable **JLG** **Genie**



| MAKE    | MODEL    | TYPE       | MAX LOAD CAPACITY | MAX LIFT HEIGHT | MAX FORWARD REACH | DIMENSIONS (LWH)                     | WEIGHT    | CAT-CLASS |
|---------|----------|------------|-------------------|-----------------|-------------------|--------------------------------------|-----------|-----------|
| Skytrak | 3013     | Telescopic | 2,700 lb          | 13 ft           | 7 ft 1 in         | 8 ft 9 in / 55 in / 79 in *          | 5,280 lb  | 460-1000  |
| JLG     | G5-18A   | Telescopic | 5,512 lb          | 18 ft           | 11 ft             | 12 ft / 6 ft / 6 ft 4 in             | 11,000 lb | 460-1010  |
| Genie   | GTH-5519 | Telescopic | 5,500 lb          | 18 ft 10 in     | 11 ft 3 in        | 12 ft 3 in / 5 ft 11 in / 6 ft 6 in  | 10,360 lb | 460-1010  |
| Skytrak | 6036     | Telescopic | 6,000 lb          | 36 ft 1 in      | 22 ft 4 in        | 18 ft / 9 ft 4 in / 8 ft 3 in        | 21,300 lb | 460-1020  |
| Skytrak | 8042     | Telescopic | 8,000 lb          | 41 ft 11 in     | 26 ft 7 in        | 19 ft / 8 ft 3 in / 8 ft 3 in        | 27,100 lb | 460-1040  |
| Skytrak | 10042    | Telescopic | 10,000 lb         | 42 ft 1 in      | 26 ft 7 in        | 20 ft 8 in / 8 ft 6 in / 8 ft 4 in   | 27,300 lb | 460-1060  |
| Skytrak | 10054    | Telescopic | 10,000 lb         | 53 ft 2 in      | 38 ft 9 in        | 21 ft / 8 ft 6 in / 8 ft 4 in        | 28,200 lb | 460-1070  |
| Genie   | GTH-1056 | Telescopic | 10,000 lb         | 56 ft 10 in     | 42 ft             | 22 ft / 8 ft 6 in / 8 ft 6 in        | 30,000 lb | 460-1070  |
| JLG     | 1255     | Telescopic | 12,000 lb         | 55 ft           | 42 ft             | 20 ft 1 in / 8 ft 5 in / 8 ft 4 in   | 33,960 lb | 460-1080  |
| JLG     | 1644     | Telescopic | 15,650 lb         | 43 ft 7 in      | 31 ft 1 in        | 20 ft 3 in / 8 ft 1 in / 8 ft 9 in * | 33,660 lb | 460-1087  |
| JLG     | 1732     | Telescopic | 16,755 lb         | 31 ft 8 in      | 18 ft 7 in        | 19 ft 5 in / 8 ft 1 in / 8 ft 9 in * | 31,145 lb | 460-1088  |
| Skyjack | ZB2044   | Telescopic | 20,000 lb         | 44 ft 10 in     | 27 ft 5 in        | 20 ft 3 in / 8 ft 6 in / 9 ft        | 45,000 lb | 460-1090  |

\* Less forks

## ROUGH TERRAIN STRAIGHT MAST FORKLIFT

Get the job done fast and easy with nimble balance on uneven terrain, high-performing lift capabilities, operator comfort and visibility.

### Features include:

- Push-button parking brake
- Eye-level operator instrument cluster
- Available 4WD
- Narrow zero-tail swing design

**8,000 LB**  
MAX LOAD CAPACITY

**UP TO 22 FT**  
MAX FORK HEIGHT

**CASE**  
CONSTRUCTION



| MAKE | MODEL | LOAD CAPACITY | MAX FORK HEIGHT | DIMENSIONS (LWH)                     | WEIGHT    | CAT-CLASS |
|------|-------|---------------|-----------------|--------------------------------------|-----------|-----------|
| Case | 586   | 6,000 lb      | 22 ft           | 16 ft 2 in. / 6 ft 9 in / 10 ft 6 in | 13,360 lb | 455-1020  |
| Case | 588   | 8,000 lb      | 22 ft           | 17 ft 11 in / 6 ft 9 in / 10 ft 6 in | 16,102 lb | 455-1040  |

## HAND TRUCKS AND DOLLIES

With overall weight ranging from 11 to 149 pounds and the capability of lifting and moving heavy materials.

**UP TO 16,000 LB**  
LOAD CAPACITY



| MAKE        | MODEL    | TYPE                                       | VOLUME CAPACITY | LOAD CAPACITY | DIMENSIONS (LWH)                  | WEIGHT | CAT-CLASS |
|-------------|----------|--|-----------------|---------------|-----------------------------------|--------|-----------|
| Johnson Bar | 29AK53   | Pry Lever dolly                            | N/A             | 5,000 lb      | 60 in / 10.5 in / 5 in            | 43 lb  | 911-3325  |
| Grainger    | 48LW43   | Heavy duty tilt debris cart                | 1/2 cu yd       | 1,350 lb      | 59-1/4 in / 27-3/4 in / 34-7/8 in | 92 lb  | 930-2073  |
| Grainger    | 48LW45   | Heavy duty tilt debris cart / forkliftable | 1 cu yd         | 2,200 lb      | 70 in / 33-7/8 in / 43-1/8 in     | 149 lb | 930-2076  |
| Hilman      | KRS-8-4S | Roller set                                 | N/A             | 16,000 lb     | 6-1/2 in / 4-1/8 in               | 85 lb  | 480-1340  |
| Grainger    | 35YM02   | General purpose dolly                      | N/A             | 1,200 lb      | 30 in / 18 in / 6-1/2 in          | 15 lb  | 930-2228  |

## MATERIAL LIFTS

These lifts, including stacker lifts, contractor lifts, pneumatic material lifts, Roust-A-Bouts, Rol-A-Lifts, electric hand trucks, gantry cranes, drywall/sheetrock lifts, duct lifts and stair-climber dollies.

**UP TO 6,000 LB**  
MAX LOAD CAPACITY

**UP TO 25 FT**  
MAX LIFT HEIGHT

**SUMNER**



| MAKE      | MODEL   | TYPE                            | LOAD CAPACITY        | MAX HEIGHT     | POWER TYPE          | OPERATING DIMENSIONS (LWH) | WEIGHT      | CAT-CLASS |
|-----------|---------|---------------------------------|----------------------|----------------|---------------------|----------------------------|-------------|-----------|
| Genie     | GH3.8   | Pneumatic material lift         | 300 lb               | 12 ft 5-1/2 in | CO2 (Tank required) | 17 in / 53 in / 41 in      | 75 lb       | 480-3500  |
| Sumner    | 2010    | Contractor lift - outriggers    | 1,000 lb             | 11 ft 7-1/8 in | Manual winch        | 62 in / 74 in / 76 in      | 223 lb      | 480-3460  |
| Sumner    | 2412    | Contractor lift - no outriggers | 450 lb               | 13 ft          | Manual winch        | 48 in / 26.4 in / 62.8 in  | 195 lb      | 480-3475  |
| Sumner    | 2416    | Contractor lift - outriggers    | 450 lb               | 17 ft          | Manual winch        | 48 in / 55.3 in / 62.8 in  | 243 lb      | 480-3525  |
| Sumner    | 2118    | Contractor lift - outriggers    | 650 lb               | 18 ft          | Manual winch        | 73 in / 74 in / 84 in      | 321 lb      | 480-3540  |
| Sumner    | 2124    | Contractor lift - outriggers    | 650 lb               | 24 ft          | Manual winch        | 73 in / 74 in / 84 in      | 399 lb      | 480-3600  |
| Sumner    | 2012S   | Contractor lift - outriggers    | 800 lb               | 13 ft          | Manual winch        | 62 in / 74 in / 63.5 in    | 320 lb      | 480-3630  |
| Sumner    | 2615    | Contractor lift - outriggers    | 1,100 lb             | 15 ft          | Manual winch        | 62 in / 74.5 in / 76.5 in  | 346 lb      | 480-3660  |
| Sumner    | R-150   | Roust-A-Bout                    | 1,500 lb             | 15 ft          | Manual winch        | 40 in / 40 in / 79 in      | 336 lb      | 480-1925  |
| Sumner    | R-250   | Roust-A-Bout                    | 1,500 lb             | 25 ft          | Manual winch        | 60 in / 60 in / 119 in     | 493 lb      | 480-1920  |
| Sumner    | 2311    | Drywall lift                    | 99 lb                | 11 ft 2-3/4 in | Manual winch        | 55 in / 55 in / 52 in      | 109 lb      | 100-7030  |
| Powermate | M1      | Stair climber                   | 650 lb               | 5 ft           | 12V battery         | 16.5 in / 24 in / 60 in    | 75 lb       | 480-1060  |
| Skarnes   | M-4-6   | Rol-A-Lift                      | 4,000 lb<br>6,000 lb | 12 in 6 in     | Hydraulic jack      | 10 in / 23 in / 44 in      | 340 lb/pair | 480-1080  |
| Makinex   | PHT-140 | Hand truck - electric           | 309 lb               | 6 ft 3 in      | 12V battery         | 76.8 in / 33 in / 13 in    | 121 lb      | 480-3040  |

## GANTRY CRANES

Easy to assemble and easy to move safely under their full-rated load.

**UP TO 11,000 LB**  
LOAD CAPACITY



| MAKE | MODEL  | LOAD CAPACITY | BEAM LENGTH | LEG SPAN | DIMENSIONS (LWH - MIN/MAX HEIGHT TO LIFT RING) | WEIGHT | CAT-CLASS |
|------|--------|---------------|-------------|----------|--|--------|-----------|
| EME  | 4400T  | 4,400 lb      | 15 ft       | 67 in    | 180 in / 61 in / 113.5 / 153.5 in              | 355 lb | 480-3065  |
| EME  | 4400M  | 4,400 lb      | 8 ft        | 48 in    | 96 in / 61 in / 81.5 / 111.5 in                | 240 lb | 480-3065  |
| EME  | 6600R  | 9,900 lb      | 15 ft       | 70 in    | 180 in / 72 in / 106 / 162 in                  | 575 lb | 480-3080  |
| EME  | 11000R | 11,000 lb     | 15 ft       | 70 in    | 180 in / 73 in / 105.5 / 153.5 in              | 725 lb | 480-3100  |

## JACKS AND CYLINDERS

These low-height cylinders provide the maximum power-to-height ratio and are designed to work in confined spaces where other cylinders cannot fit.

### Features include:

- Used for lifting, pushing, pulling, and holding
- Compatible with manual or electric pumps

**UP TO 100 TON**  
LOAD CAPACITY



| MAKE      | MODEL   | CAPACITY | STROKE       | HEIGHT    | CAT-CLASS |
|-----------|---------|----------|--------------|-----------|-----------|
| Enerpac   | RSM-50  | 5 Ton    | 5/8 in       | 4.88 in   | 481-1012  |
| PowerTeam | C55C    | 5 Ton    | 5-1/4 in     | 5.25 in   | 481-1018  |
| PowerTeam | C57C    | 5 Ton    | 6-3/4 in     | 7.25 in   | 481-1024  |
| Enerpac   | RSM-100 | 10 Ton   | 1 in         | 1.69 in   | 481-1030  |
| Enerpac   | RC-102  | 10 Ton   | 2-1/8 in     | 4.78 in   | 481-1036  |
| Enerpac   | RC-104  | 10 Ton   | 4-1/8 in     | 6.75 in   | 481-1040  |
| Enerpac   | RC-106  | 10 Ton   | 6-1/8 in     | 9.75 in   | 481-1042  |
| Enerpac   | RSM100  | 10 Ton   | 7/16 in      | 1.69 in   | 481-1030  |
| Enerpac   | RC-108  | 10 Ton   | 8 in         | 11.75 in  | 481-1048  |
| Enerpac   | RSM100  | 10 Ton   | 15/32 in     | 2-9/32 in | 481-1028  |
| Enerpac   | RC256   | 25 Ton   | 6.25 in      | 10-3/4 in | 481-1112  |
| Enerpac   | RCH-121 | 12 Ton   | 1.63 in      | 4.75 in   | 481-1066  |
| Enerpac   | RC156   | 15 Ton   | 6 in         | 10.69 in  | 481-1076  |
| Enerpac   | RSM-200 | 20 Ton   | 7/16 in Flat | 2.03 in   | 481-1090  |
| Enerpac   | RSS202  | 20 Ton   | 1-3/4 in     | 2.47 in   | 481-1092  |
| Enerpac   | RC-252  | 25 Ton   | 2 in         | 6.5 in    | 481-1108  |

| MAKE      | MODEL    | CAPACITY | STROKE    | HEIGHT   | CAT-CLASS |
|-----------|----------|----------|-----------|----------|-----------|
| Enerpac   | RC-254   | 25 Ton   | 4 in      | 6.5 in   | 481-1110  |
| Enerpac   | RC-256   | 25 Ton   | 6-1/4 in  | 10.25 in | 481-1112  |
| SPX       | C256C    | 25 Ton   | 6-5/8 in  | 21 in    | 481-1112  |
| Enerpac   | RC-2514  | 25 Ton   | 14-1/4 in | 18.75 in | 481-1126  |
| Enerpac   | RSM-300  | 30 Ton   | 1/2 in    | 2.31 in  | 481-1132  |
| Enerpac   | RCH-306  | 30 Ton   | 6-1/8 in  | 13 in    | 481-1150  |
| Enerpac   | RC-504   | 50 Ton   | 3.94 in   | 8.94 in  | 481-1169  |
| Enerpac   | RSM-500  | 50 Ton   | .63 in    | 2.63 in  | 481-1160  |
| Enerpac   | RCS-502  | 50 Ton   | 2-1/8 in  | 4.81 in  | 481-1162  |
| Enerpac   | RC-506   | 50 Ton   | 6-1/4 in  | 11.13 in | 481-1170  |
| PowerTeam | C556C    | 55 Ton   | 6 in      | 11.13 in | 481-1186  |
| Enerpac   | RCS-1002 | 100 Ton  | 2 in      | 5.56 in  | 481-1242  |
| Enerpac   | RC-1002  | 100 Ton  | 2-1/8 in  | 5.56 in  | 481-1238  |
| Enerpac   | RC-1006  | 100 Ton  | 6-5/8 in  | 14.06 in | 481-1254  |
| Enerpac   | RC-2510  | 25 Ton   | 10.25 in  | 14.75 in | 481-1120  |
| Enerpac   | RC-2514  | 25 Ton   | 14.25 in  | 18.75 in | 481-1126  |

## CHAIN HOISTS

Designed to handle the most demanding lifting operations with a tough exterior shell and machined interior components.

### Features include:

- All-steel construction for extreme durability
- Low headroom and lightweight design for ease of use
- Slip clutch prevents lifting damaging loads beyond rated capacity

**UP TO 10 TON**  
LOAD CAPACITY



| MAKE       | MODEL   | HEADROOM   | DIAMETER    | LOAD      | CAT-CLASS |
|------------|---------|------------|-------------|-----------|-----------|
| Harrington | CB005   | 11.2 in    | 5 in 1 in   | 1/2 Ton   | 480-2120  |
| Harrington | CB010   | 12 in hook | 6.3 in 1 in | 1 Ton     | 480-2220  |
| Harrington | CB015   | 18 in hook | 7.1 in 1 in | 1-1/2 Ton | 480-2240  |
| Harrington | CB020   | 24 in hook | 8 in 1 in   | 2 Ton     | 480-2320  |
| Harrington | CB030   | Triple     | 7.1 in 2 in | 3 Ton     | 480-2400  |
| Harrington | CB050   | 23.6 in    | 9 in 2 in   | 5 Ton     | 480-2500  |
| Harrington | CB05020 | 23.6 in    | 9 in 2 in   | 5 Ton     | 480-2540  |
| Harrington | CB080   | 21.3 in    | 10 in 2 in  | 6 Ton     | 480-2580  |
| Harrington | CB100   | 29.9 in    | 9 in 4 in   | 10 Ton    | 480-2620  |

## PORTABLE CONVEYORS



Move soil, stone, aggregate, roofing material, brick, mortar and more faster and safer.

### Features include:

- Two belt speeds
- 110V power supply
- Forward and reverse belt directions
- Internal waterproof motor
- Detachable hopper

**UP TO 18 IN**  
BELT WIDTH



| MAKE   | MODEL      | BELT LENGTH | BELT WIDTH | MOTOR | BELT CAPACITY | WEIGHT | CAT-CLASS |
|--------|------------|-------------|------------|-------|---------------|--------|-----------|
| LINKIT | LKS300-3.2 | 10 ft       | 12 in      | 110V  | 330 lb        | 228 lb | 480-2790  |
| LINKIT | LKS450-3.2 | 10 ft       | 18 in      | 110V  | 440 lb        | 256 lb | 480-2795  |

## GLASS HANDLERS



Lift glass windows, curtain walls, or any airtight material including granite, marble, concrete, steel plates, fire doors and more.

**UP TO 2,200 LB**  
LIFT CAPACITY



\*Weight with Counterweight

| MAKE   | MODEL | POWER    | LIFT CAPACITY | MAX EXTENSION / LIFT HEIGHT | MAX LOAD AT MAX EXTENSION | HYDRAULIC ROTATION / TILT FUNCTION | DIMENSIONS (LWH)         | WEIGHT*  | CAT-CLASS |
|--------|-------|----------|---------------|-----------------------------|---------------------------|------------------------------------|--------------------------|----------|-----------|
| Winlet | 770   | Electric | 770 lb        | 3 ft 5 in / 9 ft 4 in       | 440 lb                    | 360 degree / 140 degree            | 57 in / 27 in / 112 in   | 1,090 lb | 340-1050  |
| Winlet | 1265  | Electric | 1,265 lb      | 5 ft 11 in / 11 ft 10 in    | 605 lb                    | 180 degree / 180 degree            | 101.5 in / 35 in / 63 in | 2,864 lb | 340-1060  |
| Winlet | 1730  | Electric | 1,730 lb      | 8 ft 2 in / 12 ft 9 in      | 220 lb                    | 180 degree / 180 degree            | 101 in / 35 in / 63 in   | 2,916 lb | 340-1080  |
| Winlet | 2200  | Electric | 2,200 lb      | 8 ft 4 in / 13 ft 5 in      | 661 lb                    | 180 degree / 180 degree            | 109 in / 35 in / 59 in   | 3968 lb  | 340-1090  |



## CRAWLER CRANES



\*Eco Clean options available

Versatile, flexible and strong, these mini-cranes are an essential tool for any commercial or large-scale indoor or outdoor job.

**UP TO 8,920 LB**  
LOAD CAPACITY

**SPYDERCRANE**




### Features include:

- Battery, gas-propane, diesel or diesel-battery powered
- 360-degree continuous rotation
- Audible warning system relays the state of operation the crane is in

| MAKE        | MODEL            | LOAD CAPACITY | POWER          | TIP HEIGHT | FOOTPRINT (EXTENDED) | DIMENSIONS (LWH)             | WEIGHT    | CAT-CLASS |
|-------------|------------------|---------------|----------------|------------|----------------------|------------------------------|-----------|-----------|
| SPYDERCRANE | URW094           | 1,990 lb      | Battery        | 22 ft      | 10.5 ft / 10.5 ft    | 74 in / 23 in / 51 in        | 2,400 lb  | 350-1130  |
| SPYDERCRANE | URW095           | 1,990 lb      | Gas-propane    | 31 ft      | 12.5 ft / 12.5 ft    | 108 in / 24 in / 56 in       | 4,300 lb  | 350-1145  |
| Jekko       | SPX309 - Derated | 1,950 lb      | Electric       | 35 ft 9 in | 12 ft / 12 ft        | 9 ft 5 in / 2 in / 5 ft 6 in | 4,600 lb  | 350-1150  |
| SPYDERCRANE | URW095           | 1,990 lb      | Battery        | 31 ft      | 12.5 ft / 12.5 ft    | 108 in / 24 in / 56 in       | 4,300 lb  | 350-1150  |
| SPYDERCRANE | URW295           | 6,450 lb      | Battery        | 31 ft      | 12.5 ft / 12.5 ft    | 108 in / 24 in / 56 in       | 4,300 lb  | 350-1205  |
| SPYDERCRANE | URW295           | 6,450 lb      | Gas-propane    | 31 ft      | 12.5 ft / 12.5 ft    | 108 in / 24 in / 56 in       | 4,300 lb  | 350-1200  |
| SPYDERCRANE | URW295           | 6,450 lb      | Diesel         | 31 ft      | 12.5 ft / 12.5 ft    | 108 in / 24 in / 56 in       | 4,300 lb  | 350-1210  |
| SPYDERCRANE | URW205           | 5,800 lb      | Battery        | 31 ft      | 12.5 ft / 12.5 ft    | 108 in / 21 in / 55 in       | 4360 lb   | 350-1186  |
| SPYDERCRANE | URW306           | 5,800 lb      | Battery        | 52 ft      | 15 ft / 14.5 ft      | 171 in / 51 in / 71 in       | 8,760 lb  | 350-1225  |
| SPYDERCRANE | URW506           | 5,800 lb      | Diesel         | 54 ft      | 19.5 ft / 19.5 ft    | 54 in / 78 in / 195 in       | 11,000 lb | 350-1270  |
| SPYDERCRANE | URW376           | 6,680 lb      | Diesel-battery | 52 ft      | 15 ft / 14.5 ft      | 171 in / 71 in / 51 in       | 8,900 lb  | 350-1240  |
| SPYDERCRANE | URW376T          | 6,680 lb      | Diesel-battery | 52 ft      | 15 ft / 14.5 ft      | 171 in / 71 in / 51 in       | 8,900 lb  | 350-1265  |
| SPYDERCRANE | URW547           | 8,920 lb      | Diesel-battery | 68 ft      | 19.5 ft / 19.5 ft    | 195 in / 78 in / 54 in       | 11,000 lb | 350-1285  |

## CRAWLER CRANE ATTACHMENTS

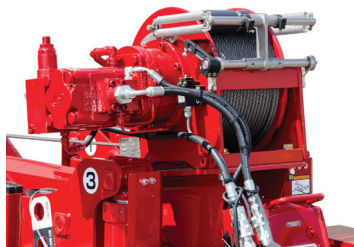

**AUXILIARY WINCH**



**GLASS MANIPULATOR**

| MAKE        | TYPE                          | DESCRIPTION            | CAT-CLASS |
|-------------|-------------------------------|------------------------|-----------|
| SPYDERCRANE | Auxiliary Winch               | 300 ft of usable wire  | 350-1410  |
| SPYDERCRANE | Glass Manipulator             | 1,300 lb lift capacity | 350-1400  |
| Jekko       | Glass Manipulator-Quadra Tilt | 1,400 lb lift capacity | 350-1360  |

## PICK AND CARRY CRANES



Compact, self-propelled cranes designed to lift, shift and place loads without the need for outriggers, which means the crane can move while handling the load. Suitable for work in warehouses or spaces where access is difficult for other cranes and where handling of heavy loads through doors is required.

### Features include:

- Battery Powered
- Radio Remote Controlled
- Compact Footprint
- No outriggers

**UP TO 11,000 LB**  
LOAD CAPACITY

**UP TO 30 FT**  
LIFT HEIGHT



| MAKE  | MODEL   | FUEL TYPE | LOAD CAPACITY                | LIFT HEIGHT | DIMENSIONS (LWH)                    | WEIGHT    | CAT-CLASS |
|-------|---------|-----------|------------------------------|-------------|-------------------------------------|-----------|-----------|
| Jekko | MPK10   | Electric  | 1,950 lb                     | 16 ft       | 8 ft 8 in / 3 ft 1 in / 6 ft 4 in   | 4,400 lb  | 350-3225  |
| Jekko | MPK20   | Electric  | 4,400 lb hook 3,960 lb winch | 16 ft       | 8 ft 8 in / 3 ft 1 in / 6 ft 4 in   | 4,400 lb  | 350-3220  |
| Jekko | MPK50W+ | Electric  | 11,000 lb                    | 30 ft 2 in  | 9 ft 10 in / 3 ft 11 in / 5 ft 8 in | 10,000 lb | 350-3230  |

## CARRY DECK CRANES

Ideal for lifting materials that require a compact low-profile crane that can clear overhead obstacles and maneuver in tight spaces.

### Features include:

- 3-section boom with 90-degree rotation or 360-degree continuous boom rotation
- Two-wheel, four-wheel or crab steering
- Available features include all-weather cab, a/c, 4WD, boom work lights and more

**UP TO 15 TON**  
LOAD CAPACITY

**UP TO 50 FT**  
LIFT HEIGHT



| MAKE      | MODEL     | FUEL TYPE | LOAD CAPACITY | CAPACITY ON OUTRIGGERS | CAPACITY W/O OUTRIGGERS | LIFT HEIGHT | DIMENSIONS (LWH)                  | WEIGHT    | CAT-CLASS |
|-----------|-----------|-----------|---------------|------------------------|-------------------------|-------------|-----------------------------------|-----------|-----------|
| Broderson | IC-20-1J  | Diesel    | 2.5 Ton       | 5,000 lb               | 2,500 lb                | 15 ft       | 22 ft / 4 ft / 7 ft 6 in          | 6,380 lb  | 350-2000  |
| Broderson | IC-20-1J  | Dual fuel | 2.5 Ton       | 5,000 lb               | 2,500 lb                | 15 ft       | 22 ft / 4 ft / 7 ft 6 in          | 6,380 lb  | 350-2010  |
| Broderson | IC-35-2F  | Diesel    | 4 Ton         | 8,000 lb               | 6,700 lb                | 19 ft       | 27 ft / 5 ft / 6 ft 6 in          | 7,860 lb  | 350-2030  |
| Broderson | IC-35-2F  | Dual fuel | 4 Ton         | 8,000 lb               | 6,700 lb                | 19 ft       | 27 ft / 5 ft / 6 ft 6 in          | 7,860 lb  | 350-2040  |
| Broderson | IC-80-3J  | Diesel    | 8 Ton         | 18,000 lb              | 11,700 lb               | 30 ft       | 40 ft / 6 ft 6 in / 7 ft 3 in     | 16,750 lb | 350-2060  |
| Broderson | IC-80-3J  | Dual fuel | 8 Ton         | 18,000 lb              | 11,700 lb               | 30 ft       | 40 ft / 6 ft 6 in / 7 ft 3 in     | 16,750 lb | 350-2070  |
| Broderson | IC-200-3J | Diesel    | 15 Ton        | 30,000 lb              | 17,000 lb               | 50 ft       | 40 ft / 6 ft / 7 ft 11 in         | 31,080 lb | 350-2090  |
| Broderson | IC-200-3J | Dual fuel | 15 Ton        | 30,000 lb              | 17,000 lb               | 50 ft       | 66 ft / 7 ft 10.5 in / 7 ft 11 in | 31,080 lb | 350-2100  |
| Broderson | IC-250-3E | Diesel    | 18 Ton        | 36,000 lb              | 18,500 lb               | 50 ft       | 70 ft / 7- 10.5 in / 7 ft 11 in   | 37,700 lb | 350-2100  |
| Broderson | IC-250-3E | Dual fuel | 18 Ton        | 36,000 lb              | 18,500 lb               | 50 ft       | 70 ft / 7- 10.5 in / 7 ft 11 in   | 37,700 lb | 350-2115  |


# ProControl<sup>TM</sup>

NextGen



## Herc Rentals' live delivery and pick-up tracking.

Increase security and know exactly when your rented equipment will arrive or leave your job site.

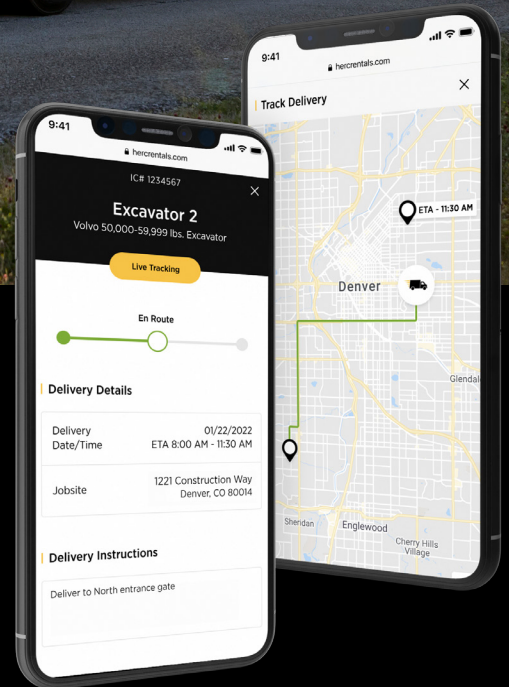

- Plan your workday based on when equipment will arrive
- Grant access to job sites at specified times to maintain security



Learn more at [HercRentals.com](https://www.HercRentals.com)

**HercRentals**<sup>®</sup>





# PUMP AND POWER



## Pumps

- Contractor Pumps
- Diaphragm Pumps
- Electric Sewage Submersible Pumps
- Electric Dewatering Submersible Pumps
- Air-Operated Double Diaphragm
- High-Volume Diesel Pumps
- Sound-Attenuated Diesel Pumps
- High-Head Diesel Pumps
- Electric Pumps
- Speciality Diesel Pumps
- Hydraulic Pumps
- Well Point Pumps

## Generators

- Portable Generators
- Towable Generators
- Skid-Mounted Generators
- Load Banks
- Containment Berms
- Noise Reduction Panels
- Fuel Tanks



## CONTRACTOR PUMPS


These trash pumps dewater job sites fast and are capable of passing water containing debris, other solids or materials.

### Features include:

- Self-priming
- Radial flow design
- Automatic low oil shutdown

**UP TO 569 GPM**  
MAX FLOW

 **TSURUMI PUMP**



| MAKE    | MODEL      | SUCTION X DISCHARGE | MAX FLOW | MAX HEAD | FUEL CAPACITY | RUN TIME | DIMENSIONS (LWH)            | WEIGHT | CAT CLASS |
|---------|------------|---------------------|----------|----------|---------------|----------|-----------------------------|--------|-----------|
| Tsurumi | TE3-50HA   | 2 x 2 in            | 137 gpm  | 105 ft   | 0.66 gal      | 3 hr     | 18.5 in / 14.6 in / 17.1 in | 55 lb  | 800-1020  |
| Tsurumi | TE3-80HA   | 3 x 3 in            | 264 gpm  | 105 ft   | 0.95 gal      | 3.3 hr   | 20.5 in / 16.5 in / 18.1 in | 64 lb  | 800-1030  |
| Tsurumi | EPT3-50HA  | 2 x 2 in            | 185 gpm  | 92 ft    | 0.95 gal      | 3.3 hr   | 23.3 in / 18.3 in / 17.4 in | 82 lb  | 800-1080  |
| Tsurumi | EPT3-80HA  | 3 x 3 in            | 357 gpm  | 92 ft    | 1.6 gal       | 3.2 hr   | 27.5 in / 20.1 in / 25.6 in | 136 lb | 800-1090  |
| Tsurumi | EPT3-100HA | 4 x 4 in            | 569 gpm  | 95 ft    | 1.7 gal       | 2.6 hr   | 30.1 in / 20.1 in / 26 in   | 160 lb | 800-1110  |

## DIAPHRAGM PUMPS

Uses two sets of flexible membranes to pump fluids and a series of check valves to ensure fluid can only travel in one direction through the chamber.

### Features include:

- Motor design delivers optimum air efficiency
- Can handle solids, and run dry without damage

**88 GPM**  
MAX FLOW



| MAKE          | MODEL | SUCTION X DISCHARGE | MAX FLOW | MAX HEAD | FUEL / CAPACITY    | RUN TIME | DIMENSIONS (LWH)        | WEIGHT | CAT CLASS |
|---------------|-------|---------------------|----------|----------|--------------------|----------|-------------------------|--------|-----------|
| Wacker Neuson | PDT3A | 3 x 3 in            | 88 gpm   | 25 ft    | Gasoline / 2.6 gal | 2.2 hrs  | 33 in / 32 in / 31.5 in | 140 lb | 800-1130  |

## ELECTRIC SEWAGE SUBMERSIBLE PUMPS



Designed to safely handle solids-laden wastewater in dewatering, effluent waste handling, onsite wastewater treatment, municipal sewer systems and septic system pumping applications.

### Features include:

- Side discharge
- Single or 3-phase power
- Mechanical seals
- 50-foot power cord

**UP TO 1,980 GPM**  
MAX FLOW

 **TSURUMI PUMP**



| MAKE    | MODEL                | DESCRIPTION                            | MAX FLOW  | MAX HEAD | CAT CLASS |
|---------|----------------------|--|-----------|----------|-----------|
| Tsurumi | 80C211               | 3 in Electric submersible sewage 15 hp | 305 gpm   | 165 ft   | 809-1940  |
| Tsurumi | MQB100B 18.5/6AW 334 | 4 in Electric submersible sewage 25 hp | 1,550 gpm | 37 ft    | 809-2100  |
| Tsurumi | MQB150B 37/6AW 405   | 6 in Electric submersible sewage 50 hp | 1,980 gpm | 76 ft    | 809-2180  |

## HOSES AND PIPING

- Pump accessories

| TYPE                   | SIZE           |
|------------------------|----------------|
| Suction Hose           | 2 in - 12 in   |
| Layflat Discharge Hose | 2 in - 8 in    |
| Chemical Hose          | 2 in - 8 in    |
| Stainless Steel Hose   | 3/4 in - 12 in |

| TYPE                             | SIZE                    |
|----------------------------------|-------------------------|
| Flanged Dock Hose                | 4 in - 14 in            |
| Fusible HDPE                     | 4 in, 12 in, 18 in      |
| Quick Disconnect Galvanized Pipe | 4 in, 6 in, 8 in, 12 in |
| Victaulic Aluminum Pipe          | 8 in, 12 in             |

## ELECTRIC DEWATERING SUBMERSIBLE PUMPS



Designed to remove clean or lightly contaminated water from flooded basements, sumps, rooftops and construction and dump sites.

### Features include:

- Compact and lightweight
- No suction lift limitations
- Top discharge design
- Extended run dry capabilities

**UP TO 5,500 GPM**  
MAX FLOW



| MAKE    | MODEL           | DESCRIPTION                              | MAX FLOW  | MAX HEAD | CAT CLASS |
|---------|-----------------|--|-----------|----------|-----------|
| Tsurumi | LB480           | 2 in Electric Submersible                | 62 gpm    | 39 ft    | 809-1860  |
| Tsurumi | LBT-800         | 2 in Electric Submersible HV 1 hp 3PH    | 82 gpm    | 59 ft    | 809-1900  |
| Tsurumi | LH23.7-61(460V) | 2 in Electric Submersible HHead 4 hp 3PH | 119 gpm   | 119 ft   | 809-1930  |
| Tsurumi | NK2-15          | 3 in Electric Submersible                | 110 gpm   | 69 ft    | 809-1880  |
| Tsurumi | LH25.5W         | 3 in Electric Submersible HHead 6 hp     | 129 gpm   | 213 ft   | 809-1980  |
| Tsurumi | KTV2-37         | 3 in Electric Submersible HV 5 hp 3PH    | 217 gpm   | 94 ft    | 809-2020  |
| Tsurumi | KTZ411          | 4 in Electric Submersible HHead 15 hp    | 378 gpm   | 167 ft   | 809-2060  |
| Tsurumi | KTZ45.5         | 4 in Electric Submersible                | 425 gpm   | 79 ft    | 809-2120  |
| Tsurumi | KRS2-8S         | 6 in Electric Submersible HV 15 hp 3PH   | 1,453 gpm | 59 ft    | 809-2190  |
| Tsurumi | KRS815          | 6 in Electric Submersible HV 20 hp 3PH   | 1,664 gpm | 75 ft    | 809-2200  |
| Tsurumi | GPN622-61       | 6 in Electric Submersible                | 1,368 gpm | 94 ft    | 809-2220  |
| Tsurumi | KRS822          | 8 in Electric Submersible HV 3PH         | 1,400 gpm | 112 ft   | 809-2230  |
| Sulzer  | J604            | 10 in Electric Submersible               | 5,500 gpm | 190 ft   | 809-2240  |


## AIR-OPERATED DOUBLE DIAPHRAGM PUMPS

Pump thick liquids, slurries, moderately abrasive fluids and suspended solids easily and efficiently.

### Features include:

- Low maintenance
- Stainless steel, polypropylene and aluminum options
- Buna, Viton, and Teflon Elastomer options

**UP TO 280 GPM**  
MAX FLOW



| MAKE        | MODEL           | DESCRIPTION                          | MAX FLOW | CAT-CLASS |
|-------------|-----------------|--------------------------------------|----------|-----------|
| Versa-Matic | E1PP5T9C        | AODD 1 in E-series polypropylene     | 36 gpm   | 812-2360  |
| Versa-Matic | E1AA2R229C-ATEX | AODD 1 in E-series aluminum          | 49 gpm   | 812-2370  |
| Versa-Matic | E2PA5T9C        | AODD 2 in E-series polypropylene     | 145 gpm  | 812-2390  |
| Versa-Matic | E2SA3R330C-ATEX | AODD 2 in E-series clamped stainless | 185 gpm  | 812-2400  |
| Versa-Matic | E2AA2R220C-ATEX | AODD 2 in E-series clamped aluminum  | 185 gpm  | 812-2410  |
| Versa-Matic | E3PP5T559A      | AODD 3 in E-series polypropylene     | 280 gpm  | 812-2430  |
| Versa-Matic | E3SA3R339C-ATEX | AODD 3 in E-series bolted stainless  | 273 gpm  | 812-2440  |
| Versa-Matic | E3AA2R220C-ATEX | AODD 3 in E-series clamped aluminum  | 234 gpm  | 812-2450  |

## HIGH-VOLUME DIESEL PUMPS

Also known as solids handling pumps, these pumps are efficient, durable and designed to handle the most difficult solids applications.

### Features include:

- Continuous auto-priming
- Run dry capabilities
- Solids handling
- Suction lifts up to 28 feet

**UP TO 19,000 GPM**  
MAX FLOW



| MAKE    | MODEL                 | DESCRIPTION                     | MAX FLOW                             | MAX HEAD | SOLIDS HANDLING | MAX FUEL CONS @ 1,800 RPM | CAT-CLASS |
|---------|-----------------------|---------------------------------|--------------------------------------|----------|-----------------|---------------------------|-----------|
| Pioneer | PP44S10L71-D2.9L4     | 4 in Pump vac assist T4F DSL    | 1,520 gpm (345 m <sup>3</sup> /h)    | 155 ft   | 3 in            | 2.07 gph (7.83 L/h)       | 801-1220  |
| Pioneer | PP66S12L71-TD2.9L4    | 6 in Pump vac assist DSL        | 2,840 gpm (645 m <sup>3</sup> /h)    | 182 ft   | 3 in            | 3.07 gph (11.62 L/h)      | 801-1230  |
| Pioneer | PP66S14L71-4045HFC06  | 6 in Pump vac assist SUPER DSL  | 3,050 gpm (693 m <sup>3</sup> /h)    | 223 ft   | 3 in            | 7.03 gph (26.6 L/hr)      | 801-1250  |
| Pioneer | PP88S12L71-TCD3.6L4   | 8 in Pump vac assist SUPER DSL  | 4,280 gpm (972 m <sup>3</sup> /h)    | 193 ft   | 3 in            | 5.48 gph (20.7 L/hr)      | 801-1280  |
| Pioneer | PP121S17L71-6068CI550 | 12 in Pump vac assist DSL       | 9,750 gpm (2,214 m <sup>3</sup> /h)  | 205 ft   | 3.6 in          | 11.72 gph (44.4 L/h)      | 801-1290  |
| Pioneer | PP121S17L71-6090CI550 | 12 in Pump vac assist SUPER DSL | 10,600 gpm (2,408 m <sup>3</sup> /h) | 298 ft   | 3.6 in          | 15.69 gph (59.39 L/h)     | 801-1300  |
| Pioneer | PP141S17L71-6090CI550 | 14 in Pump vac assist DSL       | 12,900 gpm (2,930 m <sup>3</sup> /h) | 186 ft   | 4 in            | 15.69 gph (59.39 L/h)     | 801-1320  |
| Pioneer | PP181S22L71-6135HFC09 | 18 in Pump vac assist DSL       | 19,000 gpm (4,315 m <sup>3</sup> /h) | 195 ft   | 4.5 in          | 25.3 gph (95.8 L/h)       | 801-1330  |

## SOUND-ATTENUATED DIESEL PUMPS



Sound level  
70 DBA @ 30 ft

Designed for sewer bypass projects in residential areas and other areas that have noise restrictions, such as hospitals, nursing homes and commercial areas.

### Features include:

- 14-gauge solid steel outer shell
- Hinged, lockable swinging doors for easy access
- Auto-start capabilities


**UP TO 12,900 GPM**  
MAX FLOW



| MAKE    | MODEL                   | DESCRIPTION           | MAX FLOW                             | MAX HEAD | SOLIDS HANDLING | MAX FUEL CONS @ 1,800 RPM | CAT-CLASS |
|---------|-------------------------|-----------------------|--------------------------------------|----------|-----------------|---------------------------|-----------|
| Pioneer | SAPP44S10L71-D2.9L4     | 4 in Pump vac assist  | 1,470 gpm (334 m <sup>3</sup> /h)    | 114 ft   | 3 in            | 2.04 gph (7.7 L/hr)       | 802-1340  |
| Pioneer | SAPP66S12L71-TD2.9L4-UP | 6 in Pump vac assist  | 2,720 gpm (618 m <sup>3</sup> /h)    | 128 ft   | 3 in            | 3.07 gph (11.6 L/hr)      | 802-1350  |
| Pioneer | SAPP88S12L71-TCD3.6L4   | 8 in Pump vac assist  | 4,280 gpm (972 m <sup>3</sup> /h)    | 193 ft   | 3 in            | 5.48 gph (20.7 L/hr)      | 802-1360  |
| Pioneer | SAPPI21S17L71-6068CI550 | 12 in Pump vac assist | 9,750 gpm (2,214 m <sup>3</sup> /h)  | 205 ft   | 3.6 in          | 11.72 gph (44.4 L/h)      | 802-1370  |
| Pioneer | SAPPI41S17L71-6090CI550 | 14 in Pump vac assist | 12,900 gpm (2,930 m <sup>3</sup> /h) | 203 ft   | 4 in            | 15.69 gph (59.39 L/h)     | 802-1380  |

## ROAD CROSSINGS

- Four lifting rings
- Angled approach ramps
- Constructed from 1/4 in steel wall material



| MAKE    | MODEL                | DESCRIPTION                     | CAT-CLASS |
|---------|----------------------|---------------------------------|-----------|
| Brahman | 4 in Flange x 12 in  | 4 in Brahman Board              | 820-2825  |
| Brahman | 6 in Flange x 12 in  | 6 in Brahman Board              | 820-2900  |
| Dragon  | 8 in Flange x 12 in  | 8 in Road Crossing Single Wide  | 820-2880  |
| Dragon  | 12 in Flange x 12 in | 12 in Road Crossing Single Wide | 820-2870  |
| Dragon  | 12 in Flange x 24 in | 12 in Road Crossing Double Wide | 820-2890  |


## HIGH HEAD DIESEL PUMPS

Designed to efficiently and effectively handle a variety of liquids and offer a higher head rating than most trash pumps.

### Features include:

- 24-hour running fuel capacity — most models
- Produce enough pressure to eliminate need for series pumping
- Safety shutdown switches

**UP TO 10,600 GPM**  
MAX FLOW

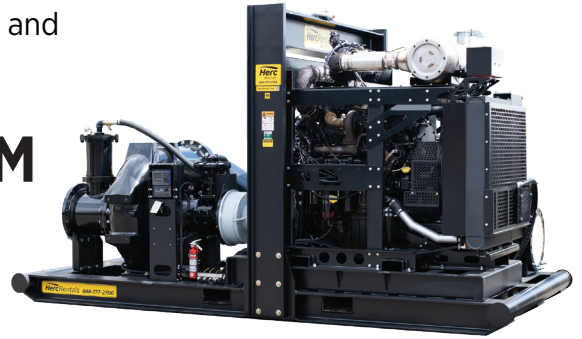

| MAKE    | MODEL                  | DESCRIPTION                        | MAX FLOW                             | MAX HEAD | SOLIDS HANDLING | MAX FUEL CONS @ 1,800 RPM | CAT-CLASS |
|---------|------------------------|------------------------------------|--------------------------------------|----------|-----------------|---------------------------|-----------|
| Pioneer | PP43C21L71-4045HFC06   | 4x3 in Pump vac assist high head   | 600 gpm (136 m <sup>3</sup> /h)      | 678 ft   | 0.75 in         | 7.03 gph (26.6 L/hr)      | 804-1455  |
| Pioneer | PP53C14L71-TD2.9L4     | 5x3 in Pump vac assist high head   | 775 gpm (176 m <sup>3</sup> /h)      | 232 ft   | 0.75 in         | 3.07 gph (11.6 L/hr)      | 804-1460  |
| Pioneer | PP63C17L71-4045HFC06   | 6x3 in Pump vac assist high head   | 1120 gpm (254 m <sup>3</sup> /h)     | 342 ft   | 0.75 in         | 7.03 gph (26.6 L/hr)      | 804-1470  |
| Pioneer | PP64S17L71-6068CI550   | 6x4 in Pump vac assist high head   | 2,820 gpm (640 m <sup>3</sup> /h)    | 470 ft   | 3 in            | 11.7 gph (44.29 L/h)      | 804-1480  |
| Pioneer | PP86S17L71-6068CI550   | 8x6 in Pump vac assist high head   | 4,700 gpm (1,067 m <sup>3</sup> /h)  | 432 ft   | 3 in            | 11.72 gph (44.4 L/h)      | 804-1520  |
| Pioneer | PP108S17L71-6090CI550  | 10x8 in Pump vac assist high head  | 7,000 gpm (1,590 m <sup>3</sup> /h)  | 380 ft   | 3.5 in          | 15.69 gph (59.39 L/h)     | 804-1540  |
| Pioneer | PP128S20L71-6135HFC09  | 12x8 in Pump vac assist high head  | 8,450 gpm (1,919 m <sup>3</sup> /h)  | 422 ft   | 3 in            | 25.3 gph (95.8 L/h)       | 804-1545  |
| Pioneer | PP86C21L71-6135HFC09   | 8x6 in Pump vac assist head 600 hp | 4,000 gpm (908 m <sup>3</sup> /h)    | 650 ft   | 1.5 in          | 25.35 gph (95.9 L/hr)     | 804-1590  |
| Pioneer | PP1212S17L71-6090CI550 | 12 in Pump vac assist              | 10,600 gpm (2,408 m <sup>3</sup> /h) | 298 ft   | 3.6 in          | 15.69 gph (59.39 L/h)     | 801-1300  |

## ELECTRIC PUMPS



These pumps run clean and quiet and are ideal for dewatering construction and industrial applications where diesel engines are prohibited or impractical.

### Features include:

- Environmental-permit exempt
- Minimizes emission footprint
- Available options include: high volume, high head, soft start, and VFD

**UP TO 4,750 GPM**  
MAX FLOW



| MAKE    | MODEL                     | DESCRIPTION                      | MAX FLOW                            | MAX HEAD | SOLIDS HANDLING | CAT-CLASS |
|---------|---------------------------|----------------------------------|-------------------------------------|----------|-----------------|-----------|
| Pioneer | PP44S10L71-HO-40-4 w/VFD  | 4 in Pump vac assist             | 1,500 gpm (340 m <sup>3</sup> /h)   | 115 ft   | 3 in            | 808-1750  |
| Pioneer | PP63C17L71-HO-150-4 w/VFD | 6X3 in Pump vac assist high head | 2,800 gpm (636 m <sup>3</sup> /h)   | 156 ft   | 3 in            | 808-1800  |
| Pioneer | PP66S12L71-HO-60-4 w/VFD  | 6 in Pump vac assist             | 2,720 gpm (618 m <sup>3</sup> /h)   | 128 ft   | 3 in            | 808-1770  |
| Pioneer | PP88S12L71-HO-125-4 w/VFD | 8 in Pump vac assist             | 4,750 gpm (1,079 m <sup>3</sup> /h) | 193 ft   | 3 in            | 808-1780  |

## CONTAINMENT BERMS

- Sidewalls are folded up/down, creating a containment system for leaks and spills of oil, fuel, chemicals and other environmentally harmful chemicals.



| MAKE   | MODEL    | SIZE          | CAT-CLASS |
|--------|----------|---------------|-----------|
| PACTEC | PT8812   | 8 in x 8 in   | 913-1024  |
| PACTEC | PT101012 | 10 in x 10 in | 913-1039  |
| PACTEC | PT121212 | 12 in x 12 in | 913-1051  |
| PACTEC | PT122512 | 12 in x 25 in | 913-1060  |



## SPECIALITY DIESEL PUMPS

Designed to efficiently and effectively handle a variety of liquids and offer a higher head rating than most trash pumps.

### Features include:

- 24-hour running fuel capacity
- Produce enough pressure to eliminate need for series pumping
- Safety shutdown switches

**UP TO 7,300 GPM**  
MAX FLOW



| MAKE    | MODEL                | DESCRIPTION                          | MAX FLOW                            | MAX HEAD | SOLIDS HANDLING | MAX FUEL CONS @ 1,800 RPM | CAT-CLASS |
|---------|----------------------|--------------------------------------|-------------------------------------|----------|-----------------|---------------------------|-----------|
| Pioneer | PP44S10L2-D2.9L4     | 4 in Pump vac assist SS              | 1,470 gpm (334 m <sup>3</sup> /h)   | 114 ft   | 3 in            | 2.04 gph (7.7 L/hr)       | 803-1400  |
| Pioneer | PP66S12L2-TD2.9L4-GL | 6 in Pump vac assist SS              | 2,840 gpm (645 m <sup>3</sup> /h)   | 182 ft   | 3 in            | 3.07 gph (11.62 L/h)      | 803-1410  |
| Pioneer | PP66S14L2-4045HFC06  | 6 in Super Pump vac assist SS        | 3,170 gpm (720 m <sup>3</sup> /h)   | 275 ft   | 3 in            | 7.03 gph (26.6 L/hr)      | 803-1430  |
| Pioneer | PP63C17L2-4045HFC06  | 6X3 in Pump vac assist SS high head  | 1,120 gpm (254 m <sup>3</sup> /h)   | 342 ft   | 0.75 in         | 7.03 gph (26.6 L/hr)      | 804-1560  |
| Pioneer | PP88S12L2-TCDD3.6L4  | 8 in Super Pump vac assist SS        | 4,280 gpm (972 m <sup>3</sup> /h)   | 193 ft   | 3 in            | 5.48 gph (20.7 L/hr)      | 803-1440  |
| Pioneer | PP108S17L2-6090CI550 | 10X8 in Pump vac assist SS high head | 7,300 gpm (1,658 m <sup>3</sup> /h) | 326 ft   | 3.5 in          | 15.69 gph (59.39 L/h)     | 804-1570  |

## HYDRAULIC PUMPS

Designed for dewatering mines, quarries and other high suction lift applications.

### Features include:

- Residential muffler
- Automatic oil pressure/temperature safety shut down
- Submersible pump head options

**UP TO 5,750 GPM**  
MAX FLOW

| MAKE | MODEL  | DESCRIPTION   | MAX FLOW              | SOLIDS HANDLING | MAX FUEL CONS | CAT-CLASS |
|------|--------|---|-----------------------|-----------------|---------------|-----------|
| D&D  | 4SSS44 | 4 in Stainless steel sludge pumphead - 44 gpm       | 900 gpm @ 20 in TDH   | 3 in            | N/A           | 811-2270  |
| D&D  | 4S44   | 4 in Sludge pumphead - 44 gpm                       | 900 gpm @ 20 in TDH   | 3 in            | N/A           | 811-2280  |
| D&D  | 6S44   | 6 in Sludge pumphead - 44 gpm                       | 2,150 gpm @ 20 in TDH | 3 in            | N/A           | 811-2310  |
| D&D  | 8T44   | 8 in Trash pumphead - 44 gpm                        | 2,750 gpm @ 20 in TDH | 3 in            | N/A           | 811-2320  |
| D&D  | 12T96  | 12 in Trash pumphead - 96 gpm                       | 5,750 gpm @ 20 in TDH | 4 in            | N/A           | 811-2340  |
| D&D  | 400DTR | 65 hp John Deere, 400D Power unit, trailer-mounted  | N/A                   | N/A             | 2.8 gal/hr    | 814-2633  |
| D&D  | 800DTR | 200 hp John Deere, 800D Power unit, trailer-mounted | N/A                   | N/A             | 7.3 gal/hr    | 814-2640  |


## WELL POINT PUMPS

Designed to handle large volumes of water and air.

### Features include:

- High-efficiency performance
- Diesel and electric options
- Integral fuel tank designed for 24-hour operation

**UP TO 2,200 GPM**  
MAX FLOW

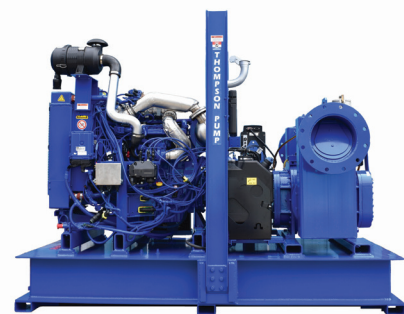

| MAKE     | MODEL            | DESCRIPTION                           | MAX FLOW  | AIR MOVING CAPACITY | MAX FUEL CONS | CAT-CLASS |
|----------|------------------|---------------------------------------|-----------|---------------------|---------------|-----------|
| Thompson | 6PW-DHS-ID90E-SK | 6 in Piston Pump (Enclosed)           | 400 gpm   | 53 cfm              | 0.4 gph       | 806-1650  |
| Thompson | 8RW-DDS-3.6-X    | 8 in Rotary Wellpoint Pump (Open)     | 1,750 gpm | 275 cfm             | 4.48 gph      | 806-1675  |
| Thompson | 8RW-DDS-3.6-XC   | 8 in Rotary Wellpoint Pump (Enclosed) | 1,750 gpm | 275 cfm             | 4.48 gph      | 806-1680  |
| Thompson | 12R-DDS-3.6-X    | 12 in Rotary Wellpoint Pump (Open)    | 2,200 gpm | 400 cfm             | 4.48 gph      | 806-1690  |


# Power Solutions

Delivering power to a construction site, special event or a variety of any industrial site or facility requires careful planning and consideration. Our power experts will walk your job with you to gain understanding of all of your power needs. We'll specify the most efficient and economical power solution to ensure your mission-critical power needs are met.



Generators ranging from:

**20kW TO 1,000kW**

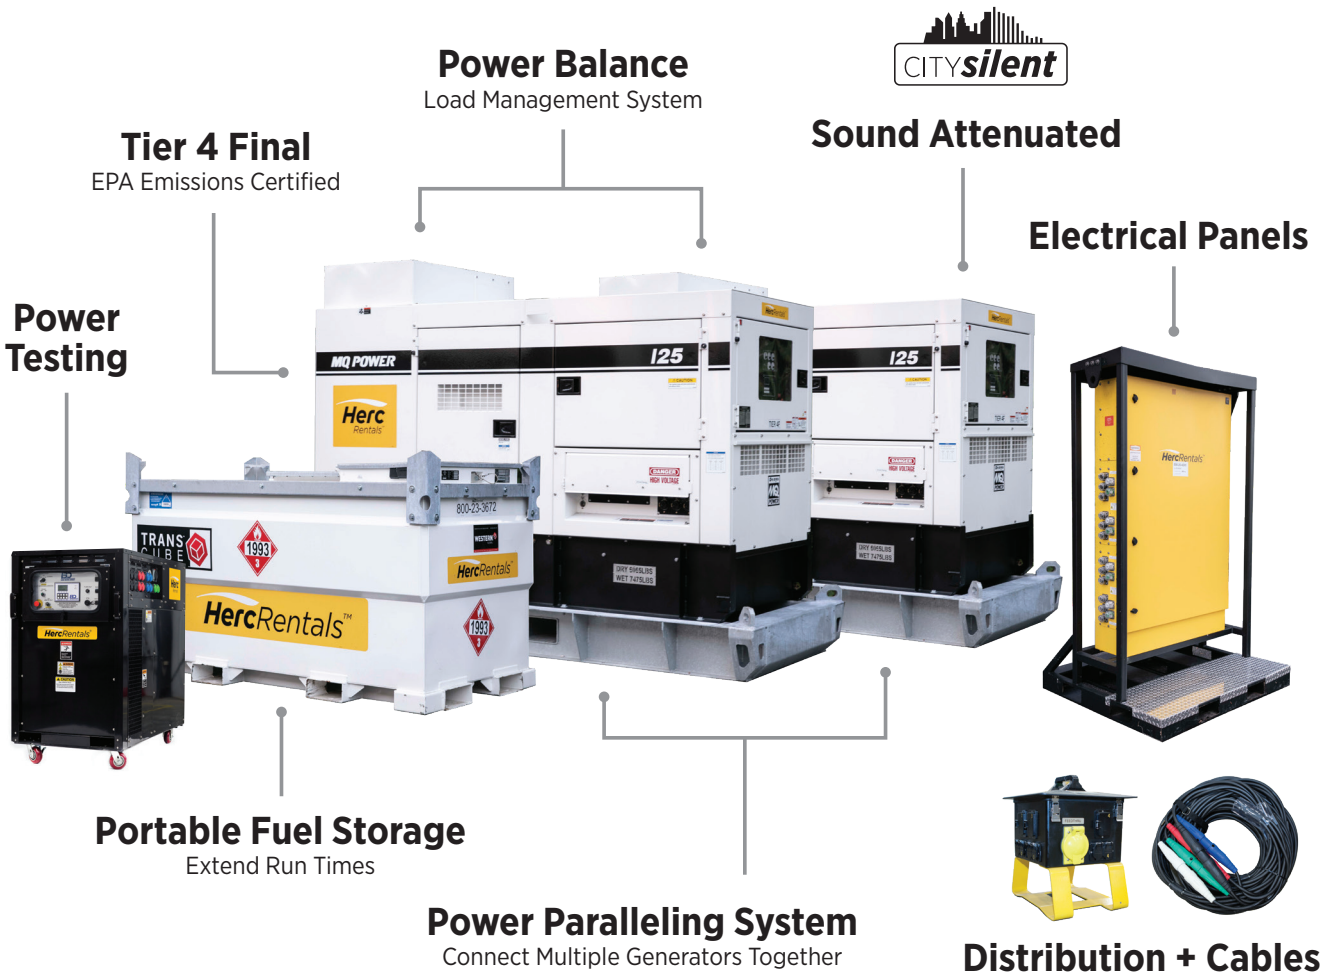

## PORTABLE GENERATORS

These compact but powerful generators can be used to power tools and equipment at job sites, outdoor events, offices and residences.

### Features include:

- Heavy duty frames
- 2-7 outlets
- Reduced noise level
- Electronic ignition

**UP TO 8 HR**  
RUN TIME

**2-14 KW**



| MAKE            | MODEL          | TYPE               | RATED WATTS | SURGE WATTS | VOLTAGE/AMPS                | FUEL CAPACITY | RUN TIME | WEIGHT  | CAT CLASS |
|-----------------|----------------|--------------------|-------------|-------------|-----------------------------|---------------|----------|---------|-----------|
| Honda           | EU2200iTA1     | Inverter generator | 1,600       | 2,000       | 120V SS / 16.7A             | 0.9 gal       | 4.0 hr   | 46 lb   | 500-1025  |
| Briggs-Stratton | BGP2400        | Inverter           | 1,800       | 2,400       | (2) 120V/20A                | 1 gal         | 8 hr     | 50.4 lb | 500-1025  |
| Honda           | EB3000CK2A     | Portable generator | 2,600       | 3,000       | 120V / 25A                  | 2.6 gal       | 6.1 hr   | 71 lb   | 500-1030  |
| Honda           | EU3000iS1A     | Inverter generator | 2,800       | 3,000       | 120V / 25A                  | 3.4 gal       | 7.2 hr   | 134 lb  | 500-1035  |
| Briggs-Stratton | BGP4500        | Inverter           | 3,700       | 4,500       | (4) 120V/20A / (1) 120V/30A | 3.5 gal       | 16 hr    | 104 lb  | 500-1045  |
| Honda           | EB5000XK3      | Portable generator | 4,001       | 6,000       | 120-240V                    | 6.2 gal       | 8.1 hr   | 214 lb  | 500-1050  |
| Honda           | EU7000iAT1     | Inverter generator | 5,500       | 7,000       | 120-240V / 58.3-29.1A       | 5.1 gal       | 6.5 hr   | 262 lb  | 500-1075  |
| Briggs-Stratton | BGP6500        | Inverter           | 5,000       | 6,500       | (4) 120V/20A / (1) 240V/30A | 5 gal         | 14 hr    | 128 lb  | 500-1075  |
| Honda           | EB10000        | Portable generator | 9,000       | 10,000      | 120-240V / 83.8-41.6A       | 8.1 gal       | 5.3 hr   | 403 lb  | 500-1100  |
| Mi-T-M          | GEN-14000-1MHE | Portable generator | 12,000      | 14,000      | 120-240V / 116.7-58.3A      | 13.2 gal      | 8.0 hr   | 508 lb  | 500-1110  |

## TOWABLE GENERATORS

Designed to provide long-lasting, reliable power to meet the most demanding requirements and built to withstand tough environments.

### Features include:

- Auto start/stop allows generator to start from a remote location
- Weatherproof steel housing decreases noise level to 65 dB(A).
- Fuel tank capacity allows for lengthy, continuous run time

**UP TO 33 HR**  
RUN TIME

**20-1,000 KW**



| MODEL         | TIER   | KW PRIME (STANDBY) | STYLE   | DIMENSIONS (LWH)            | DRY WEIGHT | WET WEIGHT | TOTAL FUEL CAPACITY | FUEL CONSUMPTION (FULL LOAD) | RUN TIME | CAT CLASS |
|---------------|--------|--------------------|---------|-----------------------------|------------|------------|---------------------|------------------------------|----------|-----------|
| DCA25SSIU4F   | 4F     | 20 (22)            | Trailer | 105 in / 57 in / 62 in      | 2,365 lb   | 2,705 lb   | 42 gal              | 1.62 gph                     | 25 hr    | 501-1020  |
| DCA45SSIU4F   | 4F     | 36 (40)            | Trailer | 148 in / 66 in / 77 in      | 3,395 lb   | 4,035 lb   | 79 gal              | 2.93 gph                     | 27 hr    | 501-1040  |
| DCA70SSJU4i   | 4i     | 56 (62)            | Trailer | 166 in / 72 in / 85 in      | 4,683 lb   | 5,414 lb   | 103 gal             | 4.30 gph                     | 23 hr    | 501-1055  |
| DCA70SSIU4F   | 4F     | 56 (62)            | Trailer | 166 in / 72 in / 85 in      | 4,420 lb   | 5,300 lb   | 103 gal             | 4.40 gph                     | 23 hr    | 501-1055  |
| DCA125SSJU4i  | 4i     | 100 (110)          | Trailer | 182 in / 80 in / 90 in      | 6,856 lb   | 8,049 lb   | 168 gal             | 7.30 gph                     | 23 hr    | 501-1100  |
| DCA125SSIU4F  | 4F     | 100 (110)          | Trailer | 181 in / 79 in / 120 in     | 7,010 lb   | 8,210 lb   | 169 gal             | 7.11 gph                     | 23 hr    | 501-1100  |
| DCA150SSJU4F  | 4F     | 120 (132)          | Trailer | 209 in / 85 in / 96 in      | 9,195 lb   | 11,176 lb  | 279 gal             | 8.40 gph                     | 33 hr    | 501-1120  |
| DCA220SSJU4F  | 4F     | 176 (194)          | Trailer | 210 in / 88 in / 99 in      | 10,456 lb  | 13,076 lb  | 369 gal             | 12.50 gph                    | 29 hr    | 501-1175  |
| DCA300SSJU4F  | 4F     | 240 (264)          | Trailer | 223 in / 95 in / 106 in     | 13,418 lb  | 16,258 lb  | 400 gal             | 17.20 gph                    | 23 hr    | 501-1250  |
| DCA300SSJU4F2 | 4F     | 240 (264)          | Trailer | 224 in / 100 in / 120 in    | 14,296 lb  | 17,353 lb  | 431 gal             | 16.70 gph                    | 25 hr    | 501-1250  |
| DCA400SSI4F   | 4F     | 320 (336)          | Trailer | 265 in / 94 in / 111 in     | 16,560 lb  | 19,439 lb  | 406 gal             | 22.50 gph                    | 18 hr    | 501-1320  |
| C500D6RG      | TIER 2 | 455 (500)          | Trailer | 239 in / 96 in / 148 in     | 29,440 lb  | 35,380 lb  | 849 gal             | 30.4 gph                     | 27 hr    | 501-1500  |
| C500D6RE      | 4F     | 500 (550)          | Trailer | 360 in / 96 in / 163 in     | 26,920 lb  | 34,786 lb  | 1,000 gal           | 34 gph                       | 29 hr    | 501-1510  |
| C1000D6RE     | TIER 4 | 500 (550)          | Trailer | 286.92 in / 102 in / 123 ft | 22,440 lb  | 26,250 lb  | 547 gal             | 23.5 gph                     | 23 hr    | 501-1510  |
| C1000D6RG     | TIER 2 | 900 (1000)         | Trailer | 359 in / 96 in / 160 ft     | 41,280 lb  | 53,378 lb  | 1,704 gal           | 63.9 gph                     | 26 hr    | 501-2100  |



## SKID-MOUNTED GENERATORS

Skid mounted designed to reduce the job site foot print, reliable power to meet the most demanding requirements and built to withstand tough environments.

### Features include:

- Auto start/stop allows generator to start from a remote location
- Weatherproof steel housing decreases noise level to 65 dB(A).
- External fuel connection allows for lengthy, continuous run time

**UP TO 25 HR**  
**RUN TIME**

**100-325 KW**



| MODEL         | TIER | KW PRIME (STANDBY) | STYLE | DIMENSIONS (LWH)        | DRY WEIGHT | WET WEIGHT | TOTAL FUEL CAPACITY | FUEL CONSUMPTION (FULL LOAD) | RUN TIME | CAT CLASS |
|---------------|------|--------------------|-------|-------------------------|------------|------------|---------------------|------------------------------|----------|-----------|
| DCA125SSIU4F  | 4F   | 100 (110)          | Skid  | 138 in / 56 in / 96 in  | 6,065 lb   | 7,475 lb   | 169 gal             | 7.11 gph                     | 23 hr    | 501-1105  |
| DCA220SSJU4F  | 4F   | 176 (194)          | Skid  | 153 in / 59 in / 96 in  | 8,570 lb   | 9,365 lb   | 69 gal              | 12.50 gph                    | 5 hr     | 501-1180  |
| DCA300SSJU4F  | 4F   | 240 (264)          | Skid  | 167 in / 67 in / 86 in  | 12,335 lb  | 13,045 lb  | 100 gal             | 17.20 gph                    | 5 hr     | 501-1255  |
| DCA300SSJU4F2 | 4F   | 240 (264)          | Skid  | 167 in / 67 in / 108 in | 12,335 lb  | 16,125 lb  | 431 gal             | 16.70 gph                    | 25 hr    | 501-1255  |
| DCA400SSI4F   | 4F   | 320 (336)          | Skid  | 193 in / 67 in / 106 in | 13,450 lb  | 14,355 lb  | 56 gal              | 22.50 gph                    | 2 hr     | 501-1325  |

## LOAD BANKS



Can prevent a loss of power resulting in productions delays and rising costs during an emergency or disaster.

## 125-3,000 KW

### Features include:

- Portable built to fit through any industrial door
- Quick-Connect, color-coded Cam-Lok power connectors
- Control Power Emergency-Stop (E-STOP) push button is provided to disable control power voltage to all operator control power circuits
- Backlit LCD offers superior viewing for both bright and dim light conditions



| MAKE              | MODEL                         | RATING   | DIMENSIONS   | WEIGHT                                     | CAT-CLASS |
|-------------------|-------------------------------|--|--|--|-----------|
| Load Banks Direct | LP125-240-480-IDM-CB-CASE     | 125 KW @ 480V 3PH 150A per phase<br>125 KW @ 240V 3PH 301A per phase     | 18 in / 28 in / 38 in<br>Case: 22 in / 32 in / 50 in | Load Bank 140 lb<br>Travel Case 76 lb      | 525-1362  |
| Load Banks Direct | LP600H-240-480-IDMT-CB + Cage | 600 KW @ 480V 3PH 722A per phase<br>600 KW @ 240V 3PH 1443A per phase    | 34 in / 58 in / 60 in<br>Cage: 43 in / 66 in / 73 in | Load Bank 1,300 lb<br>Shipping Cage 445 lb | 525-1364  |
| Load Banks Direct | LP1000-480-IDMT-CB + Cage     | 1,000 KW @ 480V 3PH 1202A per phase                                      | 34 in / 50 in / 77 in<br>Cage: 43 in / 57 in / 89 in | Load Bank 1,300 lb<br>Shipping Cage 412 lb | 525-1366  |
| Load Banks Direct | LT3000-480-IDMT-CB + Trailer  | 3,000 KW @ 480V 3PH 6308A per phase<br>750 KW @ 240V 3PH 1804A per phase | 113 in / 48 in / 98 in                               | 5,000 lb                                   | 525-1368  |



## GENERATOR PERFORMANCE CHART

| MODEL        | PRIME POWER OUTPUT RATING |     | AMPS AT 3-PHASE 0.8 PF |     | AMPS AT 1-PHASE 1.0 PF |         |                  |      | MAIN LINE CB RATING AMPS | OCR TRIP SET AMPS | MSKVA @ 30% VDIP |
|--------------|---------------------------|-----|------------------------|-----|------------------------|---------|------------------|------|--------------------------|-------------------|------------------|
|              |                           |     |                        |     | 4-WIRE                 |         | 240/120V ZIG ZAG |      |                          |                   |                  |
|              |                           |     |                        |     | 120V                   | 240V    | 120V             | 240V |                          |                   |                  |
| DCA25SSIU4F  | 25                        | 20  | 60                     | 30  | 56 x 3                 | 28 x 3  | 60 x 2           | 60   | 60                       | 30                | 65               |
| DCA45SSIU4F  | 45                        | 36  | 108                    | 54  | 100 x 3                | 50 x 3  | 108 x 2          | 108  | 125                      | 54                | 100              |
| DCA70SSIU4F  | 70                        | 56  | 168                    | 84  | 155 x 3                | 78 x 3  | 168 x 2          | 168  | 175                      | 84                | 170              |
| DCA125SSIU4F | 125                       | 100 | 300                    | 150 | 278 x 3                | 139 x 3 | 301 x 2          | 301  | 300                      | 152               | 410              |
| DCA150SSJU4F | 150                       | 120 | 361                    | 180 | 333 x 3                | 167 x 3 | 361 x 2          | 361  | 400                      | 180               | 500              |
| DCA220SSJU4F | 220                       | 176 | 529                    | 265 | 488 x 3                | 244 x 3 |                  |      | 600                      | 265               | 700              |
| DCA300SSJU4F | 300                       | 240 | 722                    | 361 | 666 x 6                | 333 x 3 |                  |      | 800                      | 361               | 800              |
| DCA400SSI4F  | 400                       | 320 | 962                    | 481 | 888 x 3                | 444 x 3 |                  |      | 1,000                    | 481               | 1,000            |
| C500D6RG     | 600                       | 500 | 1908                   | 827 |                        |         |                  |      | 2,000                    | 827               | 2,000            |

## SAFE AND SOUND KITS



\*Eco Clean options available

Reduce work site noise pollution by up to 97%, increase job site security, and protect from costly drips and spills all in one easy to create package.



X-Guard containment berm



Fence and crash barrier



Noise reduction panels

| MAKE            | MODEL        | DESCRIPTION                                   | DIMENSIONS (LWH)       | CAT CLASS |
|-----------------|--------------|---|------------------------|-----------|
| Traffix Devices | 45332        | Water-cable crash barrier (TL-1 + TL-2 rated) | 6 ft / 1.5 ft / 3.2 ft | 913-3766  |
| Traffix Devices | 45032-WWF    | Chain link fence section for crash barrier    | 6 ft / 2 in / 4 ft     | 913-3780  |
| Traffix Devices | 45032-WWFG-C | Chain link gate kit for crash barrier         | 6 ft / 2 in / 6 ft     | 913-3782  |
| Justrite        | 26460H       | Noise reduction panel                         | 4.3 ft / 6.7 ft        | 913-3860  |
| Pactec Inc      | IBXP81612    | X-Guard containment berm                      | 16 ft / 8 ft / 1 ft    | 913-1033  |
| Pactec Inc      | IBXP91812    | X-Guard containment berm                      | 18 ft / 9 ft / 1 ft    | 913-1037  |
| Pactec Inc      | IBXP102212   | X-Guard containment berm                      | 22 ft / 10 ft / 1 ft   | 913-1049  |
| Pactec Inc      | IBXP122512   | X-Guard containment berm                      | 25 ft / 12 ft / 1 ft   | 913-1060  |
| Pactec Inc      | IBXP123212   | X-Guard containment berm                      | 32 ft / 12 ft / 1 ft   | 913-1063  |



# Fuel Storage Tanks

Compact, transportable, diesel fuel storage tanks enable keeping a ready fuel supply on hand where and when you need it. These tanks are designed for on-site equipment refueling, backup fuel supply and preventing fuel delivery downtime.

**Ideal For:** Generators, refueling of job site machinery, vehicles, and light towers

**UP TO 2,388 GAL**  
TANK CAPACITY




PRIMARY CONTAINER  
SECONDARY CONTAINER

**Lifting and Stacking**  
Liftable by crane and easily stackable.  
2 high full, 3 high empty.

**110% Containment**  
Double walled and built in weather proof containment. No need for pans or basins.

**Four-way Forklift Pockets**  
Quick and easy maneuvering and mobility.

**Monitor Fuel Levels**  
With ProControl NextGen



## Extend Run Time



Fuel 2+ Pieces of Equipment

For 2+ Weeks

= SAVINGS  
Rental pays for itself

## Job Site Fuel Solution

Avoid Fuel Run-outs






## FUEL TANKS

Diesel fuel storage tanks enable keeping a ready fuel supply on hand where and when you need it.

### Features include:

- Stackable, with forklift pockets that allow for easy moving and placement
- Takes advantage of bulk fuel savings

**UP TO 2,388 GAL**  
TANK CAPACITY

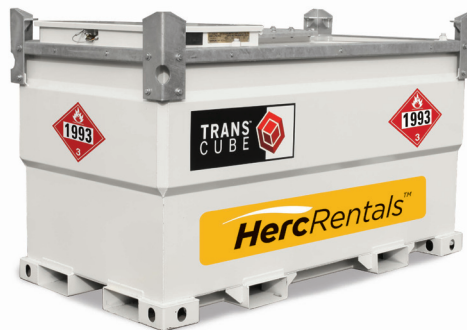

| MAKE           | MODEL                       | CAPACITY  | DIMENSIONS (LWH)                | DRY WEIGHT | WET WEIGHT | CAT CLASS |
|----------------|-----------------------------|-----------|---------------------------------|------------|------------|-----------|
| Western Global | 10TCG                       | 251 gal   | 45.31 in / 45.31 in / 52.17 in  | 1,131 lb   | 3,114 lb   | 530-1020  |
| Western Global | 20TCG                       | 552 gal   | 90.31 in / 45.35 in / 52.13 in  | 1,830 lb   | 6,315 lb   | 530-1050  |
| Western Global | H20 TCG-HERC-12VK (TOWABLE) | 523 gal   | 164.8 in / 85 in / 75 in        | 3,028 lb   | 7,408 lb   | 530-1060  |
| Western Global | 30TCG                       | 787 gal   | 91 in / 61 in / 52 in           | 2,425 lb   | 8,721 lb   | 530-1070  |
| Western Global | 50TCG                       | 1,204 gal | 90.87 in / 90.87 in / 52.13 in  | 3,695 lb   | 13,329 lb  | 530-1090  |
| Western Global | 100TCG                      | 2,388 gal | 100.83 in / 89.80 in / 99.09 in | 7,432 lb   | 26,539 lb  | 530-1100  |

## DEF REPLENISHMENT SYSTEM

Manage diesel exhaust fluid required by Tier 4 Final diesel engines. This system extends runtimes by monitoring the DEF level in diesel powered generators and automatically refills DEF into the generator DEF tank unattended.

### Features include:

- Extends generator run time
- Complements applications using external fuel

**100 GAL**  
TANK CAPACITY



| MAKE      | MODEL    | CAPACITY | FLUID TYPE                                    | DIMENSIONS (LWH)               | DRY WEIGHT | WET WEIGHT | CAT CLASS |
|-----------|----------|----------|---|--------------------------------|------------|------------|-----------|
| Multiquip | DEF-TANK | 100 gal  | Diesel Exhaust fluid, complies with ISO-22241 | 65.75 in / 44.75 in / 39.80 in | 1,050 lb   | 2,020 lb   | 530-1005  |

**HercRentals**<sup>®</sup>


**We'll give you the tools...  
you provide the talent**

Learn more at [careers.hercrentals.com](https://careers.hercrentals.com)



# FUEL TANK RUN TIME CHART

Generators running at full load can consume large quantities of diesel fuel to keep the power on. Applications requiring long run times at peak load power can benefit from the addition of a fuel tank beyond the generator's day tank.

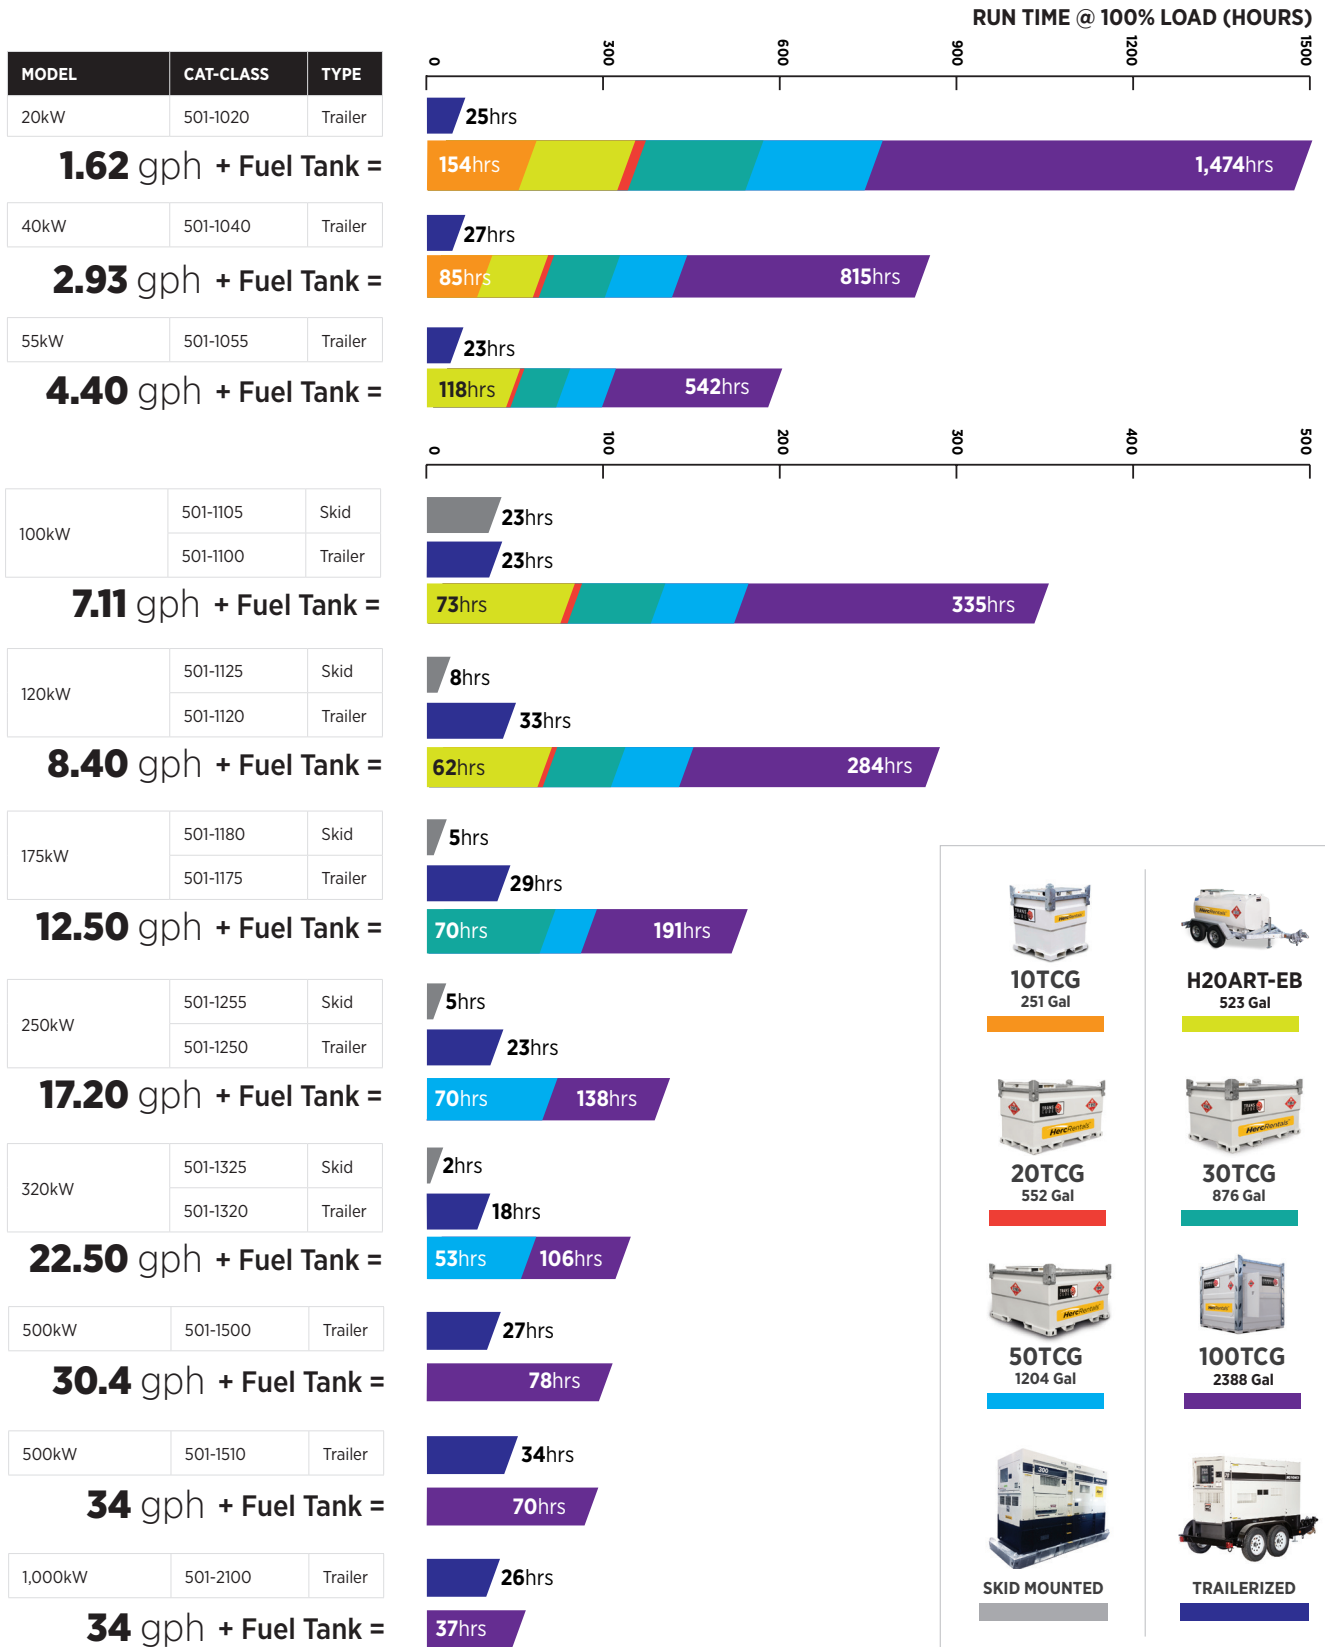



# Real-time data to improve fleet efficiency and job site productivity.

## ProControl<sup>TM</sup> NextGen



### Fleet Diagnostics

Improve inefficiencies and reduce equipment downtime.

Monitor:

- Fuel and DEF levels
- Coolant temperatures
- Battery voltage
- Ignition status and more

### Fleet Utilization

Reduce equipment downtime, become more proactive, and cost-conscious.

Track:

- Usage trends
- Utilization percentage
- Hours of equipment usage
- Miles traveled and more

### Analytics and Reporting

Make informed decisions for your business with our robust reporting suite. Select from a library of pre-built reports or build your own.

- Analyze data that is meaningful, useful and actionable
- Schedule and send reports to yourself and other account contacts



Learn more at [HercRentals.com](https://www.HercRentals.com)

**HercRentals**<sup>®</sup>



# TRUCKS AND TRAILERS



## TRUCKS

Pick-up Trucks  
Utility Trucks  
Contractor Trucks  
Vans  
Stake Body Trucks  
Dump Trucks  
Water Trucks  
Bucket Trucks  
Attenuator Trucks  
Crane Trucks  
Terminal Tractors

## TRAILERS

Tilt Trailers  
Utility Trailers  
Dump Trailers  
Equipment Trailers  
Water Trailers  
Reel Trailers

## CARTS

Diesel  
Gas  
Electric





# We Have a Truck for That

Herc Rentals is the only source you will need for a wide variety of quality trucks and trailers ready for rent. Choose from various cab configurations, capacities, bed lengths, and tow packages.



Gas



Diesel



Tow Package



Bluetooth\*



Backup Camera



## PICK-UP TRUCKS



### Features:

- 1/2 Ton - 1 Ton models

**GVWR**  
7,000-11,200 LB



## UTILITY TRUCKS



### Features:

- Storage Compartments

**GVWR**  
10,700 LB



## VANS



### Features:

- Passenger and Cargo vans

**GVWR**  
9,000 LB



## BUCKET TRUCKS



### Features:

- Insulated Bucket

**GVWR**  
19,500 LB



## STAKE BODY



### Features:

- Removable Stakes
- Lift Gate

**GVWR**  
16,500-25,999 LB



## DUMP TRUCKS



### Features:

- In-cab Controls
- Tarp System

**GVWR**  
19,500-58,000 LB



## WATER TRUCKS



### Features:

- In-cab Controls
- 5 Spray Heads

**CDL  
REQUIRED**

**GVWR**  
33,000-62,000 LB



## ATTENUATOR



### Features:

- Removable Stakes
- 65 mph attenuator

**GVWR**  
25,999 LB

## ADD A TRAILER EQUIPMENT TRAILERS



**GVWR**  
25,900-44,920 LB



## PICK-UP TRUCKS


### Features include:

- Back-up camera
- Bluetooth
- Tow package
- Spray-in bedliner
- ProControl NextGen

**UP TO 1 TON**



| MAKE      | MODEL          | BODY / CAB STYLE | DRIVE TRAIN | FUEL TYPE | GVWR      | PAYLOAD CAPACITY | TOW CAPACITY | CAT CLASS |
|-----------|----------------|------------------|-------------|-----------|-----------|------------------|--------------|-----------|
| Chevrolet | Colorado       | Crew             | 4x4         | Gas       | 6,000 lb  | 1,560 lb         | 7,000 lb     | 659-5005  |
| Chevrolet | Silverado 1500 | Regular          | 4x4         | Gas       | 7,000 lb  | 2,052 lb         | 9,500 lb     | 659-5010  |
| Chevrolet | Silverado 1500 | Double           | 4x4         | Gas       | 7,200 lb  | 1,967 lb         | 9,200 lb     | 659-5030  |
| Chevrolet | Silverado 1500 | Crew             | 4x4         | Gas       | 7,200 lb  | 1,800 lb         | 9,100 lb     | 659-5050  |
| Chevrolet | Silverado 2500 | Crew             | 4x4         | Gas       | 9,900 lb  | 2,968 lb         | 13,900 lb    | 659-5160  |
| Chevrolet | Silverado 3500 | Crew             | 4x4         | Gas       | 11,000 lb | 4,099 lb         | 13,700 lb    | 659-5240  |

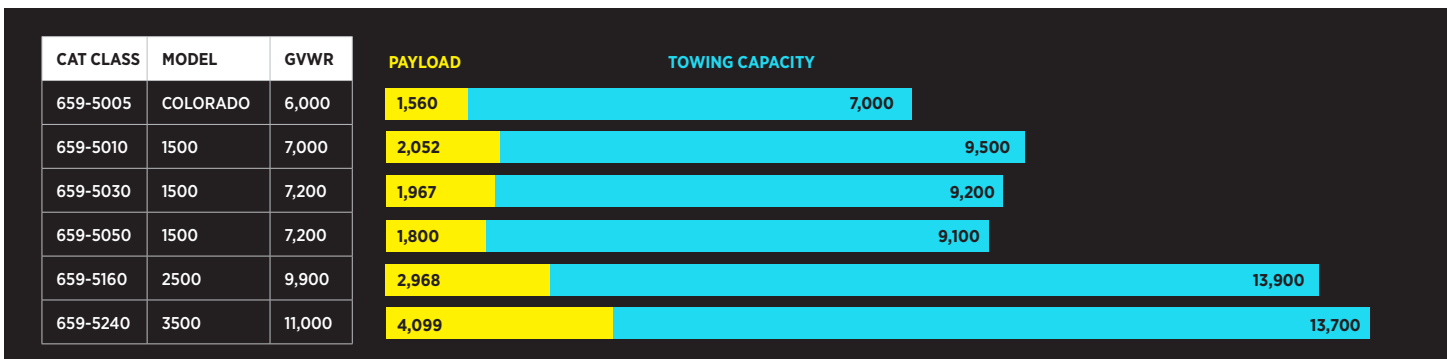

## UTILITY TRUCK

### Features include:

- Storage compartments
- Ladder rack
- Back-up camera
- Bluetooth
- Tow package

**CREW CAB**



| MAKE      | MODEL | DRIVE TRAIN | FUEL TYPE | GVWR      | CDL REQUIRED | CAT CLASS |
|-----------|-------|-------------|-----------|-----------|--------------|-----------|
| Chevrolet | 3500  | 4x4         | Gas       | 11,500 lb | No           | 659-5925  |

## CONTRACTOR TRUCK

### Features include:

- Fork lift loadable material rack
- Built-in cab guard
- (2) 96 inch L topside toolboxes
- (2) 48 inch L underbody toolboxes

**11 FT BED**



| MAKE | MODEL | BODY / CAB STYLE | DRIVETRAIN | FUEL TYPE | GVWR   | CDL REQUIRED | CAT CLASS |
|------|-------|------------------|------------|-----------|--------|--------------|-----------|
| Ford | F-550 | Regular          | 4x4        | Gas       | 19,500 | No           | 659-5965  |
| Ford | F-550 | Crew             | 4x4        | Gas       | 19,500 | No           | 659-5975  |

## CARGO VANS

### Features include:

- Large cargo volume behind front seat
- Swing-open rear doors; sliding side door
- Bluetooth
- Tow package
- ProControl NextGen

**3/4 TON**  
**100 IN**  
**ROOF HEIGHT**



| MAKE | MODEL | DRIVE TRAIN | FUEL TYPE | GVWR     | PAYLOAD CAPACITY | TOW CAPACITY | CAT CLASS |
|------|-------|-------------|-----------|----------|------------------|--------------|-----------|
| Ford | T250  | 4x2         | Gas       | 9,000 lb | 3,600 lb         | 5,200 lb     | 659-5470  |

## PASSENGER VANS

### Features include:

- Backup camera
- Tow package
- ProControl NextGen

**UP TO 15 PERSON**



| MAKE | MODEL | SEATING   | DRIVE TRAIN | FUEL TYPE | GVWR     | PAYLOAD CAPACITY | TOW CAPACITY | CAT CLASS |
|------|-------|-----------|-------------|-----------|----------|------------------|--------------|-----------|
| Ford | T350  | 12 person | 4x2         | Gas       | 9,000 lb | 2,800 lb         | 4,300 lb     | 659-5510  |
| Ford | T350  | 15 Person | 4x2         | Gas       | 9,400 lb | 2,800 lb         | 4,300 lb     | 659-5540  |

## STAKE BODY TRUCKS

Built to be versatile and tough and are ideal for hauling bulk materials and pallets.

### Features include:

- Removable stakes
- Lift gate
- Tow package

**UP TO 22 FT**



| MAKE | MODEL | BODY / CAB STYLE           | DRIVE TRAIN | FUEL TYPE | GVWR      | PAYLOAD CAPACITY | TOW CAPACITY | CAT CLASS |
|------|-------|----------------------------|-------------|-----------|-----------|------------------|--------------|-----------|
| Ford | F-550 | 12 ft Stake bed / Standard | 4x4         | Gas       | 19,500 lb | 7,600 lb         | 10,000 lb    | 659-5630  |
| Ford | F-550 | 12 ft Stake bed / Crew     | 4x4         | Gas       | 19,500 lb | 5,900 lb         | 10,000 lb    | 659-5725  |
| Ford | F-750 | 22 ft Stake bed / Standard | 4x2         | Gas       | 25,999 lb | 10,100 lb        | 6,000 lb     | 659-5790  |

## DUMP TRUCKS

Haul gravel, sand, demolition waste or other loose material.

### Features include:

- Tarp system
- In-cab bed controls
- Tow package

**UP TO 14 YD  
DUMP CAPACITY**



| MAKE         | MODEL  | BODY /CAB STYLE                       | DRIVE TRAIN | FUEL TYPE | GVWR   | CDL REQUIRED | PAYLOAD CAPACITY | TOW CAPACITY | CAT CLASS |
|--------------|--------|---------------------------------------|-------------|-----------|--------|--------------|------------------|--------------|-----------|
| Ford         | F-550  | 3 - 4 Yard / Standard                 | 4x4         | Gas       | 19,500 | No           | 7,000 lb         | 10,000 lb    | 659-6110  |
| Ford         | F-550  | 3 - 4 Yard / Crew                     | 4x4         | Gas       | 19,500 | No           | 7,000 lb         | 10,000 lb    | 659-6135  |
| Ford         | F-750  | 5 - 6 Yard                            | 4x2         | Gas       | 25,999 | No           | 10,900 lb        | 10,000 lb    | 659-6160  |
| Freightliner | M2-106 | 12 - 14 Yard - Automatic Transmission | 4x2         | Diesel    | 58,000 | Yes          | 33,000 lb        | 44,920 lb    | 659-6210  |

## WATER TRUCKS

Ideal for controlling dust on construction sites, as well as for mining, cleaning, fire-prevention, landscape and agricultural watering and filling swimming pools.

### Features include:

- Creek and hydrant fill options
- 5 spray heads
- In-cab controls
- Back-up camera
- Bluetooth

**UP TO 4,000 GAL  
TANK CAPACITY**



| MAKE         | MODEL  | TANK CAPACITY | DRIVE TRAIN | FUEL TYPE | GVWR      | CDL REQUIRED | CAT CLASS |
|--------------|--------|---------------|-------------|-----------|-----------|--------------|-----------|
| Ford         | F750   | 2,000 gal     | 4x2         | Gas       | 33,000 lb | Yes          | 659-6030  |
| Freightliner | M2-106 | 4,000 gal     | 4x2         | Diesel    | 58,000 lb | Yes          | 659-6050  |
| Freightliner | 108SD  | 4,000 gal     | 6x6         | Diesel    | 62,000 lb | Yes          | 659-6052  |

## BUCKET TRUCKS

### Features include:

- Articulating arm
- Insulated bucket
- 3-story reach

**45 FT  
WORKING HEIGHT**



| MAKE | MODEL | DRIVE TRAIN | FUEL TYPE | GVWR      | CDL REQUIRED | CAT CLASS |
|------|-------|-------------|-----------|-----------|--------------|-----------|
| Ford | F-550 | 4x4         | Gas       | 19,500 lb | No           | 659-6315  |

## ATTENUATOR TRUCKS

Designed to save lives in a construction work zone, the attenuator absorbs the impact of a high or low speed crash when struck from behind.

### Features include:

- Removable stakes
- Personnel bucket
- Strobe and work lights

**62 MPH**  
RATED ATTENUATOR



| MAKE | MODEL | DRIVE TRAIN | FUEL TYPE | GVWR      | CDL REQUIRED | CAT CLASS |
|------|-------|-------------|-----------|-----------|--------------|-----------|
| Ford | F750  | 4x2         | Gas       | 25,999 lb | No           | 659-6250  |

## CRANE TRUCKS

Mobile cranes that use hydraulics to lift equipment or supplies that weigh thousands of pounds safely and efficiently.

### Features include:

- Anti two-block
- Hydraulic capacity alert

**18 TON** | **71 FT**  
BOOM



| MAKE | MODEL | DRIVE TRAIN | FUEL TYPE | GVWR      | CDL REQUIRED | CAT CLASS |
|------|-------|-------------|-----------|-----------|--------------|-----------|
| Ford | F-750 | 4x2         | Diesel    | 33,000 lb | Yes          | 659-6380  |

## TERMINAL TRACTORS

Ideal for ports, intermodal, or warehouse and distribution purposes where there are rough surface conditions like potholes and railroad crossings.

### Features include:

- 33 mph max road speed
- Backup alarm, front and rear tow eyes

**70,000 LB**  
TOW CAPACITY



| MAKE     | MODEL  | DRIVE TRAIN | FUEL TYPE | GVWR      | CDL REQUIRED | CAT CLASS |
|----------|--------|-------------|-----------|-----------|--------------|-----------|
| Capacity | TJ5000 | 4x2         | Diesel    | 81,000 lb | Yes          | 659-6440  |
| Ottawa   | T2     | 4x2         | Diesel    | 81,000 lb | Yes          | 659-6440  |



## TILT TRAILERS

Ideal for transporting equipment, riding mowers, off-road vehicles, motorcycles and more.

### Features include:

- D-rings/corner ties
- Chains/binders
- Headache rack

**UP TO 18 FT**  
LENGTH



| MAKE    | MODEL       | DESCRIPTION    | GVWR      | PAYLOAD CAPACITY | HITCH TYPE  | CAT CLASS |
|---------|-------------|----------------|-----------|------------------|-------------|-----------|
| Felling | FT-6T-GW    | 12 ft Pan Tilt | 7,000 lb  | 5,350 lb         | 2 in Ball   | 610-1766  |
| Felling | FT-10IT-I-G | 16 ft Tilt     | 9,980 lb  | 7,380 lb         | 3 in Pintle | 610-1770  |
| Felling | FT-12IT-I-G | 18 ft Tilt     | 15,200 lb | 12,000 lb        | 3 in Pintle | 610-1780  |

## UTILITY TRAILERS

Lightweight trailers easily attach to any hitch and provide the extra room you need for tools, equipment, supplies or yard waste.

### Features include:

- Tailgate ramp
- Safety chains
- LED taillights
- D-rings/corner ties

**UP TO 10 FT**  
LENGTH

**UP TO 36 IN**  
DEPTH



| MAKE    | MODEL  | DESCRIPTION       | GVWR     | PAYLOAD CAPACITY | HITCH TYPE | CAT CLASS |
|---------|--------|-------------------|----------|------------------|------------|-----------|
| Felling | FT-3-G | 10 ft Pan Utility | 2,900 lb | 1,800 lb         | 2 in Ball  | 610-1059  |
| Best    | 5x8US  | 8 ft Open Top Box | 2,999 lb | 2,000 lb         | 2 in Ball  | 610-2600  |

## DUMP TRAILERS

When you need to haul heavy loads, but your project doesn't require a full-sized dump truck.

### Features include:

- Swing-open rear doors or ramp with gate
- Magnetized remote
- Roll tarp

**UP TO 10 FT**  
LENGTH



| MAKE    | MODEL         | GVWR     | PAYLOAD CAPACITY | HITCH TYPE  | CAT CLASS |
|---------|---------------|----------|------------------|-------------|-----------|
| Felling | FT-6DT-GAS-G  | 7,000 lb | 4,500 lb         | 2 in Ball   | 610-2200  |
| Felling | FT-10DT-GAS-G | 9,980 lb | 7,000 lb         | 3 in Pintle | 610-2230  |

## CABLE REEL TRAILERS

Design to move reels of cable from job site to job site.



| MAKE    | MODEL   | DESCRIPTION               | GVWR     | PAYLOAD  | CAT CLASS |
|---------|---------|---------------------------|----------|----------|-----------|
| Felling | FT8-R-G | Single cable reel trailer | 9,200 lb | 7,200 lb | 610-1500  |

## EQUIPMENT TRAILERS

The payload capacity you need to move the biggest and heaviest equipment from one job site to another.

### Features include:

- Toolbox with lockable cover
- LED lighting
- D-rings

**20 FT  
DECK LENGTH**



| MAKE    | MODEL   | DESCRIPTION                | GVWR      | PAYLOAD CAPACITY | BRAKE TYPE | HITCH TYPE  | CAT CLASS |
|---------|---------|----------------------------|-----------|------------------|------------|-------------|-----------|
| Felling | FT-20LP | 20 ft Flat deck with ramps | 25,900 lb | 20,000 lb        | Electric   | 3 in Pintle | 610-1170  |
| Felling | FT-40LP | 40 ft Flat deck with ramps | 44,920 lb | 36,320 lb        | Air        | 3 in Pintle | 610-1240  |

## WATER TRAILERS

Ideal for a variety of uses, including dust control, emergency fire response, construction, agricultural support and washing down field equipment.

### Features include:

- 2-inch centrifugal pumps
- DOT/NHTSA approved dual axle trailer
- Quick fill tank

**150 GAL  
PER MINUTE**

**525 GAL  
TANK CAPACITY**



| MAKE      | MODEL     | GVWR      | TANK CAPACITY | HITCH TYPE | CAT CLASS |
|-----------|-----------|-----------|---------------|------------|-----------|
| Multiquip | WT5C      | 10,000 lb | 525 gal       | 2 in ball  | 610-2420  |
| Wylie     | EXP-800-S | 10,000 lb | 800 gal       | 2 in ball  | 610-2430  |

**HercRentals®**

**We'll give  
you the tools...  
you provide  
the talent**

Learn more at [careers.hercrentals.com](https://careers.hercrentals.com)



## OFF-ROAD VEHICLES

Off-road utility passenger vehicles, sometimes called side-by-sides or UTVs, are small, two-to-six person, 4WD, off-road vehicles.

### Features include:

- Seatbelts
- Roll-over protection
- Dynamic braking
- Rear cargo box can be modified into a hydraulic dumping bed
- 19.1 cu. ft. of dump bed capacity with rear seats removed

**UP TO 4 PASSENGERS**  
**Kubota**



| MAKE       | MODEL          | TOP SPEED | SHORT BED CAPACITY | LONG BED CAPACITY | PASSENGERS | DRIVE TRAIN | FUEL TYPE | HORSEPOWER | CAT CLASS |
|------------|----------------|-----------|--------------------|-------------------|------------|-------------|-----------|------------|-----------|
| John Deere | 815E           | 25 mph    | N/A                | 1,000 lb          | 2          | 4WD         | Diesel    | 18.2 hp    | 630-1230  |
| Kubota     | RTV-X1100 CAB  | 25 mph    | N/A                | 1,102 lb          | 2          | 4WD         | Diesel    | 24.8 hp    | 630-1240  |
| Kubota     | RTV-X1140 ROPS | 25 mph    | 661 lb             | 1,102 lb          | 2 or 4     | 4WD         | Diesel    | 24.8 hp    | 630-1280  |
| John Deere | 855M           | 32 mph    | N/A                | 1,000 lb          | 4          | 4WD         | Diesel    | 22.8 hp    | 630-1280  |

## CARTS

Small Motorized vehicle designed to transport personnel typically on paved or hard surfaces.

### Features include:

- Bench Style Seating
- Shaded Canopy

**UP TO 6 PASSENGERS**  
**EZGO CUSHMAN**



| MAKE     | MODEL         | PASSENGERS | POWER TYPE | DIMENSIONS (LWH)*         | CAT-CLASS |
|----------|---------------|------------|------------|---------------------------|-----------|
| Club Car | Tempo         | 4          | Gas        | 108 in / 43.75 in / 71 in | 630-1120  |
| Club Car | Tempo         | 4          | Electric   | 108 in / 43.75 in / 71 in | 630-1130  |
| EZGO     | TXT           | 4          | Electric   | 115 in / 48.5 in / 82 in  | 630-1130  |
| Cushman  | Shuttle 6 EFI | 6          | Gas        | 136 in / 48.5 in / 72 in  | 630-1160  |

## BURDEN CARTS

Carriers are that are equipped with a platform that can be used to carry materials and supplies.


### Features include:

- Up to 40 Mile Range
- 3000 lb Load Capacity

**7,500 LB TOWING CAPACITY**  
**TAYLOR-DUNN**



| MAKE        | MODEL       | TOWING CAPACITY | PASSENGERS | RANGE    | POWER TYPE | CAT-CLASS |
|-------------|-------------|-----------------|------------|----------|------------|-----------|
| Taylor Dunn | Bigfoot 36V | 7,500 lb        | 2          | 30 Miles | Electric   | 630-1060  |
| Taylor Dunn | Bigfoot 48V | 7,500 lb        | 2          | 40 Miles | Electric   | 630-1060  |
| Taylor Dunn | Bigfoot 48V | 7,500 lb        | 4          | 40 Miles | Electric   | 630-1080  |

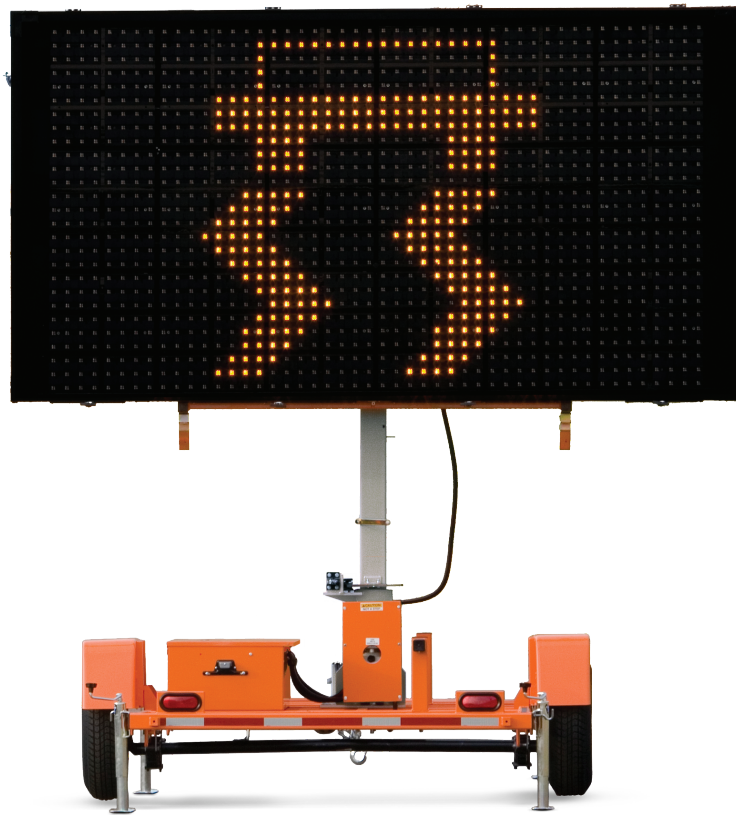

# JOB SITE AND TRAFFIC SOLUTIONS



Storage Containers  
Surveillance  
Ground Protection  
Noise Reduction Panels  
Traffic Cones

Barriers and Fencing  
Message Boards  
Arrow Boards  
Speed Radar



## STORAGE CONTAINERS

Protect your tools, equipment and building materials with Herc Rentals' storage containers.

### Features include:

- Steel containers with wood floors
- Lockbox cover to deter theft
- 20-foot container has door handles at 36-inches for easy opening/closing, 4 vents for improved air circulation and moisture build-up prevention
- 40-foot container has doors on each side, making access easier and allows for installation of dividing wall for office space

# 20-40 FT CONTAINERS



| MAKE                 | MODEL | EXTERNAL DIMENSIONS (LWH) | EMPTY WEIGHT | CAT CLASS |
|----------------------|-------|---------------------------|--------------|-----------|
| Waterfront Container | 20 ft | 20 ft / 8 ft / 8 ft 6 in  | 4,800 lb     | 610-2810  |
| Waterfront Container | 40 ft | 40 ft / 8 ft / 8 ft 6 in  | 8,400 lb     | 610-2845  |

## SURVEILLANCE



Keep a watchful eye on your job site, parking lot, outdoor event and more.

### Features include:

- Heavy-duty secure battery box
- Tie-downs can be anchored to the ground or other equipment
- High-speed 4G LTE cellular modem with built-in GPS
- LAN Wi-Fi connectivity, 2.4 or 5.8 GHz
- Cameras are day/night PTZ dome style with 360° rotation




| MAKE  | MODEL                         | POWER SOURCE                              | DIMENSIONS (LWH)       | WEIGHT   | CAT CLASS |
|-------|-------------------------------|---|------------------------|----------|-----------|
| Wanco | WCTS-Mini HD secondary camera | 390W Solar Panel, (2) 200AH AGM Batteries | 72 in / 82 in / 108 in | 1,300 lb | 175-1100  |
| Wanco | Mini-Dome                     | Surveillance Tower                        | 22 in / 5 in / 5 in    | 15 lb    | 175-1110  |

## GROUND PROTECTION

Wet or unsteady ground can cause trucks to become stuck, equipment to fail, and create a hazardous work environment for your team.

### Features and applications include:

- Stronger than plywood and will not rot or splinter
- Each mat is 4 X 8 feet molded HDPE plastic that weighs 86 pounds
- Can be placed and positioned without any special tools
- Ideal for use in the oil and gas industry, construction sites, mining operations, pipeline construction, disaster relief, public works, special events and more

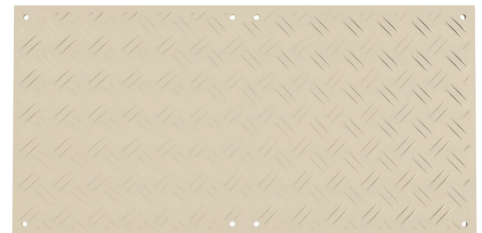

| MAKE       | MODEL       | APPLICATION | WEIGHT CAPACITY | DIMENSIONS TOTAL (LWH) | DIMENSIONS USABLE (LWH) | WEIGHT | CAT CLASS |
|------------|-------------|-------------|-----------------|------------------------|-------------------------|--------|-----------|
| Blue Gator | GTMAT4X8NAT | Heavy duty  | 200 psi         | 4 ft / 8 ft / .5 in    | 4 ft / 8 ft / .5 in     | 80 lb  | 930-9110  |
| Blue Gator | GTMAT4X8BLK | Heavy duty  | 200 psi         | 4 ft / 8 ft / .5 in    | 4 ft / 8 ft / .5 in     | 80 lb  | 930-9110  |

## NOISE REDUCTION PANELS



Also known as noise attenuation barriers, the units are easy-to-move, easy-to-install, easy-to-store and a cost-effective way to curtail noise.

### Features and applications include:

- Can be double or triple stacked for added sound reduction
- Reflective strips enhance nighttime visibility
- Lightweight, waterproof and fire, chemical and dust resistant

**UP TO 40 DB**  
NOISE CONTROL



| MAKE     | MODEL  | DIMENSIONS (LWH) | CAT CLASS |
|----------|--------|------------------|-----------|
| Justrite | 26460H | 4.3 ft / 6.7 ft  | 913-3860  |

## SAFETY CONES

Traffic control devices are highly-visible and durable.

### Features include:

- Hot and cold weather performance
- High visibility
- Industry leading stability and durability



| MAKE            | MODEL                     | TYPE         | HEIGHT | WEIGHT | CAT CLASS |
|-----------------|---------------------------|--------------|--------|--------|-----------|
| Traffix Devices | 16036-HIWB-10 Enviro-Cone | Traffic Cone | 36 in  | 12 lb  | 913-3747  |

## TRAFFIC CONES

With our urbanite pedestrian barrier, you can create a safe pedestrian walkway around or through a construction zone.

### Features include:

- Industry leading stability and durability
- Built-in handles for ease of movement and deployment



| MAKE            | MODEL                            | TYPE        | HEIGHT | WEIGHT | CAT CLASS |
|-----------------|----------------------------------|-------------|--------|--------|-----------|
| Traffix Devices | 42144-TS0212-HIP Grabber-Tube II | Delineators | 42 in  | 12 lb  | 913-3712  |

## CRASH BARRIERS / FENCING

Designed with water fill-holes for stability and integrated steel cables to reduce vehicle penetration on impact.

### Features include:

- Stackable, lock together and have forklift slots for easy movement
- Capable of attaching 6-foot fencing and gate for added protection




| MAKE            | MODEL        | DESCRIPTION                                   | DIMENSIONS (LWH)       | CAT CLASS |
|-----------------|--------------|---|------------------------|-----------|
| Traffix Devices | 45332        | Water-cable crash barrier (TL-1 + TL-2 rated) | 6 ft / 1.5 ft / 3.2 ft | 913-3766  |
| Traffix Devices | 45032-WWF    | Chain link fence section for crash barrier    | 6 ft / 2 in / 4 ft     | 913-3780  |
| Traffix Devices | 45032-WWFG-C | Chain link gate kit for crash barrier         | 6 ft / 2 in / 6 ft     | 913-3782  |

## PEDESTRIAN BARRIERS

Create a safe pedestrian walkway around or through a construction zone.

### Features include:

- Integrated handrail system
- Lock together

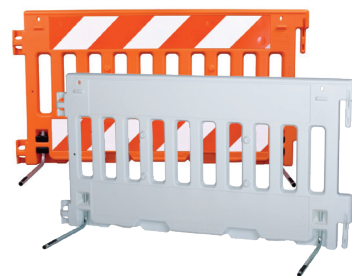

| MAKE            | MODEL        | DESCRIPTION                   | DIMENSIONS (LWH)     | WEIGHT | CAT CLASS |
|-----------------|--------------|-------------------------------|----------------------|--------|-----------|
| Traffix Devices | 45032-WWF    | 6 ft Chain Link Fence Section | 72 in / 2 in / 48 in | 32 lb  | 913-3780  |
| Traffix Devices | 45032-WWFG-C | 6 ft Single Gate Attachment   | 72 in / 2 in / 72 in | 65 lb  | 913-3782  |


## MESSAGE BOARDS



Ideal for when you need to get information to the public.

### Features include:

- Easiest programming in the industry
- 2,650 lb so can be towed by most vehicles
- Rotates 360 degrees for optimal positioning



| MAKE   | MODEL   | TYPE                      | POWER             | LIFT TYPE | DIMENSIONS               | CAT CLASS |
|--------|---------|---------------------------|-------------------|-----------|--------------------------|-----------|
| Wanaco | WTMMB-A | Full Matrix Message Board | Battery and Solar | Hydraulic | 186 in / 138 in / 123 in | 660-1070  |
| Wanaco | WTLMB-A | 3-Line Message Board      | Battery and Solar | Hydraulic | 186 in / 138 in / 123 in | 660-1040  |

## ARROW BOARDS



Ideal for directing traffic around work zones.

### Features include:

- Consumes 80% less power than other boards
- At least 1-mile visibility
- 7-pattern display and 5-pattern sequencing



| MAKE   | MODEL       | POWER             | LIFT TYPE           | DIMENSIONS              | CAT CLASS |
|--------|-------------|-------------------|---------------------|-------------------------|-----------|
| Wanaco | WTSP55-LSAC | Battery and Solar | Hand-operated winch | 119 in / 96 in / 136 in | 660-1020  |

## SPEED RADAR



Often deployed in school zones, work zones and high-incident areas, these signs provide a degree of traffic calming unmatched by other roadway signs.

### Features include:

- Perfect for residential and 2-lane roads
- Battery powered and solar charging
- Under 900 lb, can be towed by most vehicles
- Bold, highly visible, 26-inch LED numbers



| MAKE   | MODEL   | POWER             | LIFT TYPE           | DIMENSIONS              | CAT CLASS |
|--------|---------|-------------------|---------------------|-------------------------|-----------|
| Wanaco | WSDT3-S | Battery and Solar | Hand-operated winch | 106 in / 61 in / 123 in | 660-1100  |



# SCAN QR CODE TO FIND A LOCATION NEAR YOU.




## TYPES OF BRANCHES



**General Rental** - Our classic fleet includes aerial, earthmoving, material handling, trucks and trailers, air compressors, compaction, lighting, and ProContractor specialty equipment includes professional grade tools.



**ProSolutions** - Our Industry-specific solutions-based services, includes power generation, climate control remediation and restoration, and studio and production equipment.

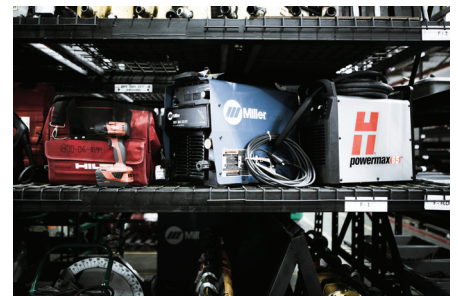

**ProResources** - Industrial line of products and services that include equipment, supplies, tools, customized mobile tool rooms, and high-tech asset management systems.

## OTHER SPECIALITY BRANCHES

**ProTrucks** - Herc Rentals is the only source you will need for a wide variety of quality commercial trucks and trailers ready for rent. Choose from various cab configurations, capacities, bed lengths, and tow packages.

**HES** - Herc Entertainment Service (HES) specializes in Film, TV, and Live Event rentals. We carry entertainment specific products to fit your production's needs. From aerial equipment, forklifts, carts, lighting equipment, generators, ground cover, and climate products.



# ProControl<sup>TM</sup>

NextGen

## The Future of the Equipment Rental Industry is Here.



### Account Management

Customize your dashboard to put analytics, PO management, bill payment and more right at your fingertips.




### Fleet Management

Real-time analytics, utilization, diagnostics, and alerts. Use actionable data to reduce downtime, right-size rental fleet and eliminate redundancy.



### Herc Rentals Ecommerce

Customer-focused ecommerce experience. Browse and rent equipment anytime, from anywhere.

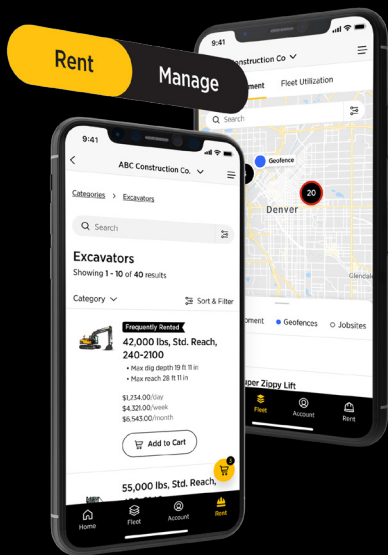

ProControl NextGen delivers visibility and insight into your entire rental and fleet management experience.

ProControl NextGen from Herc Rentals is the new standard for fleet and account management in the equipment rental industry. This new solution uses advanced technology to power a feature-rich website and mobile app, a user-friendly ecommerce solution, robust account management tools, a revolutionary fleet management platform, including telematics for optimum fleet productivity and analytics, and unparalleled custom reporting — all-in-one, easy to navigate place.



HercRentals.com