



V052023

FLOOR CARE SOLUTIONS

FLOOR CARE EQUIPMENT AND ATTACHMENT GUIDE

REMOVAL

- Scrapers
- Grinders and tooling
- Shot blasters
- Shot magnets
- Scarifiers and planers
- Scabblers
- Sanders
- Dust collectors

FINISHING / MAINTENANCE

- Polishers
- Buffers
- Burnishers
- Sweepers
- Scrubbers
- Carpet cleaners
- Linoleum rollers
- Dust collectors


OTHER EQUIPMENT

- Generators
- Power distribution
- Scanners
- Demolition robots



We equip our customers and communities to build a brighter future.

Herc Rentals® is a leading equipment rental supplier with more than 360 company-operated locations, principally in North America. With nearly 60 years of experience, Herc Rentals offers a full-line equipment rentals that serves key markets, including commercial and residential construction, industrial and manufacturing, civil infrastructure, automotive, government and municipalities, energy, remediation, emergency response, facilities, entertainment, and agriculture, as well as refineries and petrochemicals. The equipment rental business is supported by ProSolutions® (our industry-specific solutions-based services), ProContractor™ professional grade tools, commercial vehicles, and pump, power, and climate control product offerings, all of which are aimed at helping customers work more efficiently, effectively, and safely. For more information visit HercRentals.com.

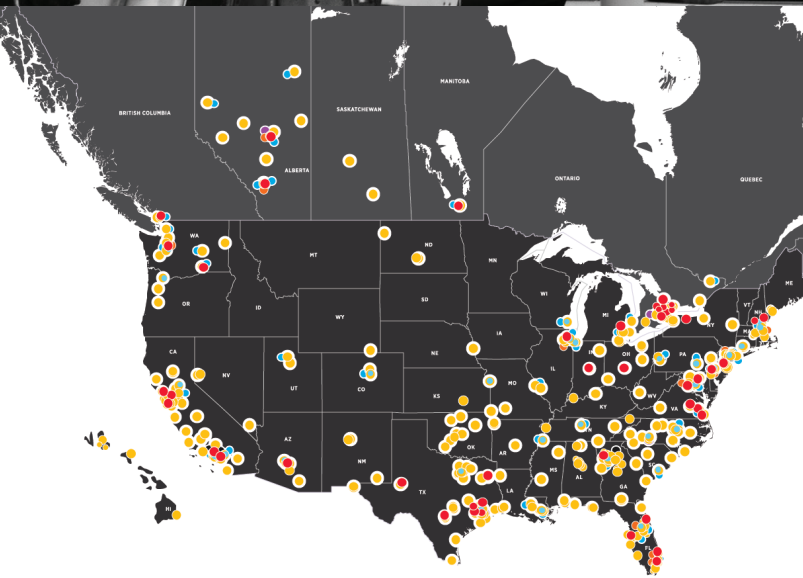

SERVICES AND INFORMATION

Safety First

Safe operation of our rental equipment is a top priority. SAFETY FIRST. SAFETY ALWAYS.

We offer Equipment Safe Operation Training with top-notch instructors for many of the equipment categories we rent.

All courses include theory, hands-on practical training, and evaluation. Upon successful course completion, you'll be issued a wallet card and certificate for the following operator certification courses:

Aerial/MEWP Scissor, Boom, Vertical Mast, Atrium, Towable, plus film and entertainment supplemental	Earthmoving
Powered Industrial Trucks Class 1, 4, 5 (warehouse forklift) Class 7 (Rough Terrain Forklift, Variable Reach & Straight Mast) Class 2 (Narrow Aisle) Class 3 (Electric Pallet Jack) Class 6 (Tugger & Ground Support Equipment)	Fall protection
	UTV
	Silica dust
	Trench solutions and more

Training is offered, in a variety of methods, at your local branch or your job site.

Rental Terms

Herc Rentals provides daily, weekly, monthly and long-term rentals. Acceptable forms of payment are checks and major credit cards, or if you're a frequent customer, we invite you to open a commercial account with us.

Please note: two forms of identification are required from all customers who do not have a commercial account, preferably a valid driver's license and a major credit card.

For your convenience, visit [HercRentals.com/us/credit](https://www.herc.com/us/credit) to download, or complete our online credit application.

Transportation Services

Herc Rentals has one of the largest equipment delivery fleets in North America. Utilizing our special delivery fleet, we ensure your equipment arrives safely and on time.

Rental Protection Plan (RPP)

Accept RPP at the start of your rental for peace of

mind! Herc Rentals offers 100% coverage for the repair or replacement costs when accidental damage or theft occurs on your jobsite, for covered equipment. Have a Certificate of Insurance (COI)? You don't have to worry about submitting a claim to your insurance company or paying your insurance deductible when damage occurs for approved RPP coverage! For more information, visit our website at [HercRentals.com/services/rpp-rental-protection-plan](https://www.herc.com/services/rpp-rental-protection-plan)

Refueling and Cleaning Services

All equipment is delivered clean and with a full tank of fuel, and if returned in the same condition, no charges apply. For your convenience upon return, we offer cleaning and refueling services.

Refueling

Customer can either refuel equipment themselves before return or return equipment to be refueled by Herc for a fee. Fees will be based on gallons used. Refueling rates include costs for fuel tanks, maintenance, and labor.

Cleaning

Equipment must be cleaned prior to return; if not returned clean, fees will be assessed to bring equipment to rental-ready condition. Cleaning rates include costs for labor and materials.

Preventative Maintenance Services

To maintain the highest level of operating performance of our fleet of generators, pumps, carry deck cranes and similar equipment, Herc Rentals performs preventative maintenance as recommended by the manufacturer. In addition, Herc Rentals complies with all inspection requirements and applies a Preventative Maintenance (PM) charge associated with performing the maintenance and service.

The PM charge is a per hour charge that is applied to every hour the equipment is operating or running while on rent. The PM charge is between \$1 - \$7 depending on the type and size of the equipment and the number of hours which is determined by the meter machine installed on the equipment. PM charges are billed monthly based on 160 hours of use. At time of final invoice, the PM charge for the time on rent will be adjusted up or down to reflect actual hours used. Inspection fees may apply separately or as part of the PM charge. The PM charge is not a tax, or a government mandated charge and Herc Rentals may change it from time to time in its discretion.

SCRAPERS

Ideal for removing floor coverings off wood or concrete floors.

Applications include:

Removing plastic floor coverings, paint, chewing gum, parquet, ceramic, linoleum, ice, rubber-backed and glued-down carpeting, and epoxy.

18.5-2,943 LB
OPERATING WEIGHT



MAKE	MODEL	TYPE	TRAVEL SPEED	POWER	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
EDCO	ALR-E	Handheld chisel scaler	Manual	Pneumatic 8 cfm @ 90 psi	66 in long	18.5 lb	100-4620
National	550	Manual push	Manual	115V 1PH 14A	33 in / 18 in / 43 in	123 lb	100-4000
Hilti	TE 1000-AVR	Manual push	Manual	120V 1PH 15A	28 in / 6 in / 12 in	26 lb	100-1260
Makinex	JHT-H	Manual cart for Hilti TE1000	Manual	N/A	43 in / 20 in / 43 in	62 lb	100-1320
National	6280HD GLADIATOR	Self-propelled	Up to 30 ft min	115V 1.5HP 14.7A	50 in / 18 in / 47 in	490 lb	100-4025
Innovatech	BULL	Self-propelled	Up to 40 ft min	115V 2HP 16.4A	35.4 in / 15 in / 43.3 in	517 lb	100-4025
National	5700	Ride-on	Up to 120 ft min	(12) 180A AGM batteries	54 in / 25 in / 51 in	2,244 lb	100-4030
National	7700	Ride-on	Up to 200 ft min	(12) 200A AGM batteries	59 in / 30 in / 51 in	2,572 lb	100-4035
Innovatech	T5500PRO	Ride-on	Up to 375 ft min	55HP Propane	67 in / 27.5 in / 62 in	2,943 lb	100-4040
Blast It All	SSA4524V3	Skid steer scraper attachment					290-2105

EDCO CHISEL SCALER BLADES/HOLDER

MAKE	MODEL	DESCRIPTION	ALR-E	CAT-CLASS
EDCO	C10324	Narrow chisel scaler 1.25 in	●	902-5905
EDCO	C10302	Wide chisel scaler 4 in	●	902-5910
EDCO	C10306	4-12 in scraper blade holder	●	902-5920
EDCO	C10329	Scraper blade 4 in	●	-
EDCO	C10304	Scraper blade 8 in	●	-


MAKINEX TE1000 BLADES/HOLDER



MAKE	MODEL	TYPE	WIDTH	LENGTH	CAT CLASS
Makinex	TSHC-HS-US-V2	Flex blade holder	5.5 in	18 in	902-1140
Makinex	TSH-B	Flex Chisel Blade	6 in	6 in	


NATIONAL SCRAPER HOLDERS

MAKE	MODEL	DESCRIPTION	6280HD	5700 7700	CAT-CLASS
National	7280-6	6 in blade holder	●	-	902-6237
National	7280-12	12 in blade holder	●	-	902-6238
National	7050-6	6 in blade holder	-	●	902-6230
National	7050-12	12 in blade holder	-	●	902-6234
National	7050-27	27 in blade holder	-	●	902-6236



NATIONAL PREMIUM HIGH-TEMPERED BLADES


Best for glued-down carpets, VCT, VAT, rubber tile, cork, and re-scraping adhesive.



MAKE	MODEL	DIMENSIONS LWH	550	6280HD	5700 7700
National	7050-200	3 in / 6 in / .062 in	●	●	-
National	7050-203	3 in / 12 in / .062 in	●	●	-
National	7050-205	3 in / 27 in / .062 in	-	-	-

NATIONAL HEAVY-DUTY BLADES

Best for VCT, VAT, wood, tile, rubber, epoxy, elastomeric coatings, scraping thin-set, and glued ceramic.



MAKE	MODEL	DIMENSIONS LWH	550	6280HD	5700 7700
National	6285	3 in / 6 in / .094 in	●	●	●
National	6284	3 in / 12 in / .094 in	●	●	●
National	6283	3 in / 27 in / .094 in	●	●	●

NATIONAL EXTRA HEAVY-DUTY BLADES

VCT, VAT, wood, tile, light ceramic, re-scraping thin-set and rubber, carpets, cork, elastomeric and urethane coatings.



MAKE	MODEL	DIMENSIONS LWH	550	6280HD	5700 7700
National	6290	3 in / 6 in / .187 in	●	●	●
National	6292	3 in / 12 in / .187 in	●	●	●

NATIONAL ANGLE SHANK WITH CARBIDE TIP


Remove ceramic and thin-set re-scraping. Light-duty and commercial-grade ceramic and porcelain tile.



MAKE	MODEL	DIMENSIONS LWH	6280HD	5700 7700	CAT-CLASS
National	7281-12	4 in / 2 in / .312 in	●	–	911-6305
National	7281-1	6 in / 1 in / .500 in	●	–	911-6300
National	7079-2	6 in / 2 in / .500 in	–	●	911-6310
National	7079-4	6 in / 4 in / .500 in	–	●	911-6320

NATIONAL SCRAPER RAZOR BLADES/HOLDERS


For super hard thin epoxies, thin mil coatings (like urethane paint).



MAKE	MODEL	DESCRIPTION	6280HD	5700 7700	CAT-CLASS
National	7280-12RBH	12 in blade holder	●	–	902-6240
National	7050-12RBH	12 in blade holder	–	●	902-6235
National	368-12	.937 / 12 / .045 in Blade	●	●	N/A

NATIONAL SELF-SCORING BLADES

Work on attached cushion, unitary or secondary backing, vinyl back, soft to medium PVC, linoleum, carpet tiles, soft cork, enhancer, and unibond hot melts.



MAKE	MODEL	DIMENSIONS LWH	550	6280HD	5700 7700
National	6260-BD	3 in / 6 in / .094 in	–	●	●
National	6249-BU	3 in / 12 in / .094 in	–	●	●

NATIONAL ULTRA HD ANGLE SHANK WITH REMOVABLE CARBIDE TIP


Remove ceramic and thin-set re-scraping. Light-duty and commercial-grade ceramic and porcelain tile. Replaceable tip.



MAKE	MODEL	DESCRIPTION	5700 7700	CAT-CLASS
National	403112	2 in ultra HD shanks, 3 carbide tips, set screws, and tool	●	902-6221
National	402394	3 carbide tips, set screws, and tool	●	N/A

NATIONAL WOOD FLOOR SHANKS

Remove Wood or LVT floors, either glued or nailed.



MAKE	MODEL	DIMENSIONS LWH	6280HD	5700 7700	CAT-CLASS
National	7082-8	2.5 in / 8 in / .300 in	●	–	911-6340
National	7075-8	2 in / 8 in / .300 in	–	●	911-6345
National	7077-8	3.5 in / 8 in / .300 in	–	●	911-6350

SCABLERS

Roughen, reduce and level concrete. Prepare surfaces for coatings and finishes.

8-24 IN
WORKING WIDTHS

UP TO 250 SQ FT
PRODUCTION RATE PER HOUR



MAKE	MODEL	VACUUM REQUIRED	TYPE	POWER	PRODUCTION RATE	WORKING WIDTH	WEIGHT	CAT CLASS
UNITEC	153.5200	200 cfm	Handheld	Pneumatic 15.9 cfm @ 90 psi	Up to 100 sq ft hr	8 in	11.5 lb	100-4400
EDCO	CD-5	300 cfm	Walk-behind push	Pneumatic 160 cfm @ 100 psi	Up to 250 sq ft hr	24 in	278 lb	100-4410

EDCO TUNGSTEN CARBIDE SCABBLER BIT

MODEL	TYPE	CD-5
18810	5 point bit for concrete - heavy texture	●



LINOLEUM ROLLER

Essential for all linoleum and vinyl flooring installations. Ensure a flat and level installation while the roller does all the work, helping to evenly distribute and flatten adhesive build-ups.

Features and applications include:

- Segmented rollers which exert even pressure on uneven surfaces
- Removable handle

15 IN
WORKING WIDTH



MAKE	MODEL	TYPE	WORKING WIDTH	WEIGHT	CAT CLASS
Roberts	10-952	Manual walk-behind (Grainger PN: 12L723)	15 in	100 lb	911-6205

GRINDERS

Floor preparing, grinding, removal and polishing systems ideal for concrete, granite, marble and more.

Features and applications include:

- Vacuum ports eliminate dust
- Capable of conquering small and large projects, including industrial use

5-32 IN
WORKING WIDTHS



MAKE	MODEL	VACUUM REQUIRED	TYPE	POWER	PRODUCTION RATE	WORKING WIDTH	WEIGHT	CAT CLASS
Hilti	DGH 130	150 cfm	Hand held / chamfer	120V 1PH 12A	N/A	5 in	5.6 lb	100-4560
Hilti	DG 150	300 cfm	Hand held	120V 1PH 16A	N/A	6 in	9 lb	100-4570
Husqvarna	HTC 270EG	250 cfm	Edge grinder	240V 1PH 10A	Up to 150 sq ft hr	10.6 in	121 lb	100-4236
Husqvarna	PG 280	250 cfm	Grinder	120V 1PH 15A	Up to 150 sq ft hr	11 in	154.3 lb	100-4230
EDCO	TG-10-11H	200 cfm	Grinder	Gasoline 11HP	Up to 500 sq ft hr	10 in	180 lb	100-4250
Husqvarna	PG 400	250 cfm	Grinder	240V 1PH 18A	Up to 500 sq ft hr	16 in	254 lb	100-4239
Husqvarna	PG 400 GAS	250 cfm	Grinder	Gasoline 10.2HP	Up to 500 sq ft hr	15.75 in	308 lb	100-4255
Husqvarna	PG 450	250 cfm	Grinder / polisher	120V 1PH 15A	Up to 225 sq ft hr	18 in	240 lb	100-4237
EDCO	2GC-NG-11H	200 cfm	Grinder	Gasoline 11HP	Up to 500 sq ft hr	22 in	282 lb	100-4260
EDCO	2EC-NG-1.5	200 cfm	Grinder	120/240V 1PH 16/8A	Up to 500 sq ft hr	22 in	258 lb	100-4220
Husqvarna	PG 540	300 cfm	Grinder / polisher	240V 1PH 30A	Up to 440 sq ft hr	20 in	392 lb	100-4275
Husqvarna	PG 690P	400 cfm	Grinder / polisher	Propane 22HP	Up to 1,300 sq ft hr	26.4 in	766 lb	100-4281
Husqvarna	PG 830S	350 cfm	Grinder / polisher	480V 3PH 22A	Up to 150-1,320 sq ft hr	32 in	1226 lb	100-4282
OZTEC	CG12E-DC7-H	Included	Ceiling grinder 7 ft - 12 ft	120V 1PH 12A+11A	N/A	7 in		100-4290


GRINDER RELATIVE PRODUCTION RATES (SQ FT/HR)

APPLICATION	PG 280	HTC 270 EG	PG 450	PG 400 ELEC	PG 400 GAS	PG 540	PG 690 P	PG 830S
Thin surface contaminate removal	150	150	225	500	500	110-275	500-1,100	550-1,100
Thick surface contaminate removal	80	80	80	400	400	88-275	325-760	330-880
Smoothen rain damaged concrete	150	150	225	500	500	220-440	760-1,300	80-1,320
Flatten exposed aggregate in concrete	70	70	100	300	300	110-275	375-850	440-880
Expose aggregate in concrete	30	30	70	200	200	66-275	200-760	280-880
Preparation of clean concrete	150	150	225	400	400	165-385	450-1,150	550-1,320
Scratch removal using metal diamonds	100	100	150	300	300	165-330	500-950	660-990
Polishing	N/A	N/A	150	N/A	N/A	275-440	760-1,300	880-1,320

SURFACE PREP DIAMOND TOOLING

Coding

The diamond tools are coded to be able to easily find the correct level of performance, applications, bond, grit, and segment size for any project.



PRODUCT CODE GUIDE	
A - APPLICATION	
G for grinding applications	
P for polishing applications	
B - LEVEL OF PERFORMANCE	
G1400 series represents the highest level of performance for all professionals focusing on high efficiency and profitability.	
G600 series is a good, low cost alternative where production outweighs tool life.	
P1200 Dry	
P100 Wet	
B - LEVEL OF PERFORMANCE	
G1410 - very soft tool to grind the hardest floors	
G1420 - soft tool for hard surface grinding	
G1440 - medium tool for medium-hard concrete	
G1470 - hard tool for soft and abrasive concrete	
G1480 - very hard tool for very abrasive surface	
G620 - soft tool for hard surface grinding	
G640 - medium tool for soft and abrasive concrete	
G670 - hard tool for soft and abrasive concrete	
P1240 - highest performance in concrete and terrazzo polishing	
P1280 - very hard tool for wet applications and stain removal	
D - GRIT SIZE REFERENCE/RELATED MESH SIZE	
3 - 20/30	Material Removal
4 - 30/40	Rough Grinding
5 - 60/80	Medium Grinding
6 - 120/140	Fine Grinding
E - REFERENCE/SEGMENT	
S - Single	
D - Double	
T - Triple	
F - GRIT SIZE REFERENCE/RELATED MESH SIZE	
2 - 50	
3 - 100	
4 - 200	
5 - 400	
6 - 800	
7 - 1,500	
8 - 3,000	

Wet vs Dry Grinding

These range of metal bond tools covers tooling for both wet and dry grinding.

Wet

- Production rates will be higher than dry grinding.
- Diamond segments can wear faster due to presence of abrasive slurry.
- Scratches from diamond grit may be deeper.
- Increased clean up time.

Dry or Slightly Wet

- Production rates will be slower on harder materials than when wet grinding.
- Softer bond segments are required in order to encourage segment wear.
- Scratches from diamond grit may not be as deep when compared to wet grinding.
- More heat is generated by the diamond segment.
- Cleaner work environment.

Power & Weight

A more powerful machine enables the operator to choose harder bond tools.

Grit Size

Changing the size of the diamond grit to a smaller particle/grit size will affect the performance of the diamond tool in the following ways:

- Create a finer scratch pattern.
- Increase the life of the diamond tool.
- The opposite will occur when changing to a larger particle/grit size.

Half Set vs Full Set

Half Set – Diamonds are placed at three alternating positions (or four on the PG 400) on the diamond holder disc. When using a half set, the diamonds tend to follow the surface of the floor. This puts more weight per square inch on the diamond tooling, making it grind more aggressively on hard floors. It does not completely flatten the floor.

Full Set – Diamonds are placed at each of the six positions (or eight on the PG 400) on the diamond holder disc. The full set is used when a flat floor is desired. If the floor has undulations, the machine will grind the high areas to match the low spots. The result is a smooth surface.

Single Segment vs Double Segment

Single Segment – Working with a single segment will increase the pressure on each segment. This will lead to more aggressive and increased productivity; however, the life of the tool will be shorter.


Double Segment – Working with a double segment will decrease the pressure on each segment, reducing the wear rate on the diamond segments. This will lead to a smoother scratch pattern, and will also reduce the load on the machine.

TOOLS FOR COATING & CONCRETE CAP REMOVAL

MATERIAL	G1400 SERIES					G600 SERIES				SHARX	G200
	G1410	G1420	G1440	G1470	G1480	G620	G640	G670	ARROW		
Removal											
Porous ceramic glues	—	—	•	•••	••	•	—	•••	—	—	—
Plastic-like ceramic glues	—	•	•••	—	—	•	•••	—	•••	—	•••
Vinyl glues	•	••	•••	•	•	••	•••	•	•••	—	•••
Paint and thin epoxy (<2 mm)	•	••	•••	•	•	••	•••	•	•••	—	•••
Thick epoxy (15-40 mm)	—	•	•••	•	—	•	•••	•	—	—	•••
Grinding											
Rain-damaged concrete	—	—	—	••	•••	—	•	••	—	—	•
Concrete, soft	—	—	—	•••	••	—	••	•••	—	—	••
Concrete, medium hard	—	•	•••	•	—	•	•••	•	—	—	•••
Concrete, hard	•••	•••	•	—	—	•••	•	—	—	•	•
Semi-polished concrete	•••	•	—	—	—	•	—	—	—	—	—
•	••	•••	••••	•••••	••••••	•••••••	••••••••	•••••••••	••••••••••	•••••••••••	••••••••••••
•	ACCEPTABLE	••	GOOD	•••	OPTIMAL	••••	GOLD	•••••	SILVER	••••••	BRONZE

G200 RENTAL SEGMENTS


3 mm height, 3 piece



MODEL	SHAPE	SINGLE/DOUBLE	GRIT SIZE (MESH)	PART NUMBER
G225S	Hexagonal	Single	30	588099901
G225D	Hexagonal	Double	30	588099904
G227S	Convex	Single	60	588099902
G227D	Convex	Double	60	588099905
G243S	Round	Double	120	588099903

G640 GRINDING SEGMENTS


10.5 mm height, 3 piece



MODEL	SHAPE	SINGLE/DOUBLE	GRIT SIZE (MESH)	PART NUMBER
G643S	Hexagonal	Single	20	503883401
G643D	Hexagonal	Double	20	503883402
G644S	Hexagonal	Single	30	503883403
G644D	Hexagonal	Double	30	503883404
G645S	Round	Double	50	503883405
G645D	Round	Double	50	503883406
G647D	Round	Double	100	503883408

ARROW G600 SERIES


Removes epoxy glue



MODEL	BOND HARDNESS	GRIT SIZE (MESH)	PART NUMBER
G621D	Soft	20	585672404
G641D	Medium	20	585672408
G671D	Hard	20	585672406

G620 GRINDING SEGMENTS


10.5 mm height, 3 piece



MODEL	SHAPE	SINGLE/DOUBLE	GRIT SIZE (MESH)	PART NUMBER
G623S	Hexagonal	Single	20	503847902
G623D	Hexagonal	Double	20	503847903
G624S	Hexagonal	Single	30	503847904
G624D	Hexagonal	Double	30	503847905
G625S	Round	Single	50	503847906
G625D	Round	Double	50	503847907
G627S	Round	Single	100	503847908
G627D	Round	Double	100	503847909

G670 GRINDING SEGMENTS

10.5 mm height, 3 piece



MODEL	SHAPE	SINGLE/DOUBLE	GRIT SIZE (MESH)	PART NUMBER
G673S	Hexagonal	Single	20	503885501
G673D	Hexagonal	Double	20	503885502
G674S	Hexagonal	Single	30	503885503
G674D	Hexagonal	Double	30	503885504
G675D	Round	Double	60	503885505
G677D	Round	Double	100	503885506


HUSQVARNA CARBIDE HOLDER/ATTACHMENT



MODEL	TYPE	PG540	PG690P	PG830S	CAT-CLASS
581276802	Holder	•	•	•	902-6105
581285001	1 x 1 in Replacement	•	•	•	N/A

POLISHING HOLDERS/PADS

RESIN PAD HOLDER PLATES



MODEL	PG450	PG540	PG690P	PG830	CAT-CLASS
596901303	●	–	–	–	902-6190
596901302	–	●	–	–	902-6191
596901301	–	–	●	●	902-6192

T60 TRANSITIONAL PADS


Honing of concrete. Use between metal and resin polishing pads. Velcro backed, must use slightly wet.



PART NUMBER	MODEL	DIM.	GRIT	PG450	PG540	PG690P	PG830
587682601	T62 green	2.5 in	50	●	–	–	–
587682602	T63 red	2.5 in	100	●	–	–	–
587682603	T64 yellow	2.5 in	200	●	–	–	–
542868130	T62 green	3 in	50	–	●	●	●
542868131	T63 red	3 in	100	–	●	●	●
542868132	T64 yellow	3 in	200	–	●	●	●
542868133	TG5 blue	3 in	400	–	●	●	●

FP40 HIPERFLEX PADS

Dry concrete polishing. Polished and cleans at the same time providing a superior and durable shine.



PART NUMBER	MODEL	DOTS	DIM.	GRIT	PG450	PG540	PG690P	PG830
587546701	FP44	3	7 in	200	●	–	–	–
587546702	FP45	3	7 in	400	●	–	–	–
587546703	FP46	3	7 in	800	●	–	–	–
587546704	FP47	3	7 in	1,500	●	–	–	–
587546705	FP48	3	7 in	3,000	●	–	–	–
587546712	FP43	4	9 in	100	–	●	●	–
542779316	FP44	4	9 in	200	–	●	●	–
542779317	FP45	4	9 in	400	–	●	●	–
542779318	FP46	4	9 in	800	–	●	●	–
542779319	FP47	4	9 in	1,500	–	●	●	–
542779320	FP48	4	9 in	3,000	–	●	●	–
587546711	FP43	5	11 in	100	–	–	–	●
542870056	FP44	5	11 in	200	–	–	–	●
542868407	FP45	5	11 in	400	–	–	–	●
542868408	FP46	5	11 in	800	–	–	–	●
542868409	FP47	5	11 in	1,500	–	–	–	●
542868410	FP48	5	11 in	3,000	–	–	–	●

5 INCH POLISH PADS FOR HILTI DGH 130

Velcro-backed. Reach high gloss levels in fewer steps.

PART NUMBER	GRIT	COLOR	PART NUMBER	GRIT	COLOR
574428901	50	Green	574429301	800	White
574429001	100	Black	574429601	1,500	Blue
574429101	200	Red	574429701	3,000	Gray
574429201	400	Yellow			

HILTI DIAMOND GRINDING WHEELS FOR DGH 130 AND DG 150



MODEL	DESCRIPTION	DGH 130	DG 150	CAT-CLASS
2144038	SPX 5 in / grinding smooth finish	●	–	903-1278
2143786	SPX 6 in / grinding smooth finish	–	●	903-1280
2144034	SPX 6 in / coating removal	–	●	903-1280

VIRGINIA ABRASIVE GRINDING CUPS FOR OZTEC CEILING GRINDER

Wet/dry concrete grinding.



PART NUMBER	DESCRIPTION	CUP DIAMETER	CHUCK SIZE
425-04079	Single row	7 in	5/8 in-11 thread
425-06573	Double row	7 in	5/8 in-11 thread
425-07234	Double turbo	7 in	5/8 in-11 thread

FLOOR TREATMENT PRODUCTS

HIPERLITH™

Lithium-based densifier applied to the concrete surface. A crystalline structure is formed that increases the surface hardness of the concrete.

DESCRIPTION	PART NUMBER
Hiperlith (1 gal/5 L)	581995701
Hiperlith (5 gal/20 L)	578273601



HIPERGUARD™ WB/SB

Penetrates the concrete to form a film along the surface. This increases the surface tension of the floor, restricting the absorption of water, oil, fats and dirt.

DESCRIPTION	PART NUMBER
Hiperguard (1 gal/5 L)	593906508
Hiperguard (5 gal/20 L)	593906509



HIPERSEAL™

Improves the surface sheen and stain resistance, making it more resistant to fats, oils, water, foods, and mild acids.

DESCRIPTION	PART NUMBER
Hiperseal (1 gal/5 L)	586916401



SHOT BLASTERS

A one-step method for stripping, cleaning and profiling floors in preparation for coatings and overlays.

Features and applications include:

- Height-adjustable handle with built-in operator controls
- Front swivel casters increase maneuverability and control

UP TO 2,000 SQ FT
BLASTING CAPACITY PER HOUR
8-10 IN
WORKING WIDTHS



MAKE	MODEL	VACUUM REQUIRED	TYPE	BLASTING WIDTH	BLASTING CAPACITY	POWER	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
National Flooring	A95	200 cfm	Walk-behind	8 in	Up to 430 sf hr	120V 1PH 17A	43.4 in / 11 in / 41 in	121 lb	100-4700
National Flooring	A97	315 cfm	Walk-behind	10 in	Up to 2,000 sf hr	240V 3PH 25A	63 in / 15.25 in / 44 in	430 lb	100-4705

STEEL SHOT

DESCRIPTION	PART NUMBER
S-330 / 50 lb bag	3411



MAGNETIC SHOT SWEEPER

Quickly pickup metal debris like shot and nails.

Features include:

- Quick release handle

5.5-24 IN
WORKING WIDTH

MAKE	MODEL	TYPE	WORKING WIDTH	OVERALL WIDTH	APPROXIMATE LB PULL	WEIGHT	CAT CLASS
National Flooring	6555	Manual handheld	5.5 in	5.5 in	N/A	2 lb	911-6648
National Flooring	6552	Manual walk-behind	24 in	30.25 in	400 lb	41 lb	911-6650

SCARIFIERS AND PLANERS

A one-step method for leveling, removing, and texturing (scarifying) surfaces.

Features include:

- Height-adjustable handle with built-in operator controls
- Vacuum port equipped

UP TO 700 SQ FT
PRODUCTION RATE PER HOUR
8-10 IN
WORKING WIDTHS



MAKE	MODEL	VACUUM REQUIRED	POWER	PRODUCTION RATE	WORKING WIDTH	WEIGHT	CAT CLASS
EDCO	CPL-8-1.5	200 cfm	115/230V 1PH 17.2A	Up to 250 sq ft hr	8 in	145 lb	100-4295
EDCO	CPM8-5	200 cfm	230V 1PH 19.8A	Up to 500 sq ft hr	8 in	220 lb	100-4300
EDCO	CPM8-9H	200 cfm	Gas 9 HP	Up to 500 sq ft hr	8 in	190 lb	100-4310
EDCO	CPM-10-13H	200 cfm	Gas 13 HP	Up to 700 sq ft hr	10 in	267 lb	100-4320



CONCRETE SCANNER

Provides real-time view of the inside of concrete and generates accurate images automatically. Locates rebar, post tension cable, metal and plastic conduits, glass-fiber cables, voids and wood in dry concrete structures.

12 IN
SCAN DEPTH



MAKE	MODEL	POWER	SCAN DEPTH	RUN TIME	LOCALIZED ACCURACY	ACCURACY OF DEPTH INDICATED	DIMENSIONS (LWH)	WEIGHT	CAT CLASS
Hilti	PS 1000-B	Li-Ion battery - rechargeable	12 in	4 hr	+/- 0.5 in	< 4 in: +/- 0.5 in >4 in: +/- 15% in	12.5 in / 5.6 in / 7.5 in	5.4 lb	100-1410

DUST CONTROL VACUUMS / DROP BAG

These industrial dust collectors comply with or exceeds OSHA standards and are suitable to use when grinding, scraping, shot blasting, scarifying, and sawing.

Features include:

- The Longopac® bag system ensures simple, dust-free bag changes.
- Both propane and electric models available

UP TO 400 CFM
AIR FLOW



MAKE	MODEL	LONGOPAC DUST BAG PN	AIR FLOW	POWER	WEIGHT	CAT CLASS
Husqvarna	S26	590429201	250 cfm	120V 1PH 20A 3.2HP	105 lb	105-1740
Husqvarna	S36 120V	590429201	300 cfm	120V 1PH 20A 3.2HP	140 lb	105-1746
Husqvarna	S36 240V	590429201	300 cfm	240V 1PH 15.7A 4.8HP	140 lb	105-1743
National Flooring	DL4000P	590429201	318 cfm	240V 3PH 20A 4.5HP	386 lb	105-1742
Husqvarna	T8600	590429201	350 cfm	480V 3PH 14A 11.5HP	454 lb	105-1747
Husqvarna	T8600P	590429201	400 cfm	Propane 18HP	628 lb	105-1749

DUST CONTROL VACUUMS / CANNISTER

These industrial dust collectors comply with or exceed OSHA standards and are suitable for use when grinding, sawing, coring, and drilling.

UP TO 300 CFM
AIR FLOW



MAKE	MODEL	AIR FLOW	POWER	WEIGHT	CAT CLASS
EDCO	Vortex 200	200 cfm	120V 1PH 16A	99 lb	105-1746
Hilti	VC 300-17 X	300 cfm	120V 1PH 9.2A	26 lb	105-1743

WET/DRY VACUUMS / CANNISTER

Collect and contain dust, debris and water easier and more cost-effectively than ever.

3.7-12.5 GAL
TANK CAPACITY

135 CFM
FLOW



MAKE	MODEL	TYPE	TANK CAPACITY	RATED FLOW	POWER	CAT CLASS
Nilfisk/Alto	Attix 30 AS/E	Wet/dry	8 gal	135 cfm air	120V 1PH 8.3A	105-1630
Nilfisk/Alto	Attix 50 AS/E	Wet/dry	12.5 gal	135 cfm air	120V 1PH 8.3A	105-1650
Hilti	DD-WMS 100	Core drill water recycling vacuum	3.7 gal	.5 gpm water	120V 1PH 9A	105-1705

BUFFERS

Powerful floor machines for buffing, scrubbing, polishing, sanding, grinding, and carpet cleaning.

17-20 IN
PAD SIZE

UP TO 7,000 SQ FT
PRODUCTION RATE PER HOUR



MAKE	MODEL	PAD SIZE	PAD SPEED	POWER	PRODUCTION RATE	WEIGHT	CAT CLASS
American Sander	FM1700 HD	17 in	175 rpm	120V 1PH 15A	Up to 6,000 sf hr	102 lb	100-5410
Pioneer Eclipse	225FP 17	17 in	175 rpm	120V 1PH 15A	Up to 6,000 sf hr	91 lb	100-5410
Pioneer Eclipse	225FP 20	20 in	175/320 rpm dual speed	120V 1PH 15A	Up to 7,000 sf hr	95 lb	100-5420

BUFFER PADS

Use with 175-350 RPM machines. Made from a variety of abrasive materials to achieve your desired results.

WHITE POLISHING

Formulated for polishing clean, dry floors. A fine water mist can be used to produce a high-gloss wet look.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-50177	17 in / 1 in Pad
Virginia Abrasives	416-50207	20 in / 1 in Pad

RED BUFFING

Restores gloss while removing scuff marks and dirt on medium traffic areas.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-50170	17 in / 1 in Pad
Virginia Abrasives	416-50200	20 in / 1 in Pad

TAN BUFFER


For light cleaning and dry buffing. Removes scuffs and black heel marks while producing a high-gloss shine.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-50176	17 in / 1 in Pad
Virginia Abrasives	416-50206	20 in / 1 in Pad

BLUE CLEANER

Removes heavy dirt and scuff marks on most floor surfaces.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-50171	17 in / 1 in Pad
Virginia Abrasives	416-50201	20 in / 1 in Pad

GREEN SCRUBBER


Most aggressive scrubbing pad for heavily soiled areas. Best for wet scrubbing or light stripping.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-50175	17 in / 1 in Pad
Virginia Abrasives	416-50275	20 in / 1 in Pad

BLACK STRIP

For heavy-duty wet stripping. Very aggressive texture to remove wax, dirt, and any finish.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-50174	17 in / 1 in Pad
Virginia Abrasives	416-50204	20 in / 1 in Pad

BURNISHERS

For high-speed burnishing and buffing to bring out the luster in hard surface floors. Available with dust control system.

20-28 IN
PAD SIZE

UP TO 10,000 SQ FT
PRODUCTION RATE PER HOUR



MAKE	MODEL	PAD SIZE	PAD SPEED	POWER	PRODUCTION RATE	WEIGHT	CAT CLASS
Tennant	BR-2000-DC	20 in	2,000 rpm	120V 1PH 15A	Up to 7,000 sf hr	92 lb	100-5430
Pioneer Eclipse	420BU	28 in	1,500 rpm	Propane 18HP	Up to 10,000 sf hr	234 lb	100-5435

BURNISHER PADS

Use with 2,000-3,000 RPM burnishing machines. Made from a variety of abrasive materials to achieve your desired results. Used during the maintenance, restoration or polishing process of coatings to moderate or high-gloss sheen.

BLUE VELVET UHS SOFT

Removes black marks without removing the finish. Achieves a higher gloss level in heavy traffic areas.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-52018	20 in / 1 in Pad
Virginia Abrasives	416-52818	28 in / 1 in Pad

NATURAL BLEND LIGHT

Blend of polyester and natural hair fibers creates a lubricating effect, producing the wet look with strength and durability.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-52015	20 in / 1 in Pad
Virginia Abrasives	416-52814	28 in / 1 in Pad

BEIGE POLY THERMAL UHS


Very high gloss finish. Performs well on soft to medium surfaces.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-52014	20 in / 1 in Pad
Virginia Abrasives	416-52821	28 in / 1 in Pad

NATURAL HAIR BLEND MEDIUM

Heavy blend of natural hair with the proper amount of synthetic fiber. Best suited for medium to hard finishes.



MAKE	PART NUMBER	DESCRIPTION
Virginia Abrasives	416-50208	20 in / 1 in Pad
Virginia Abrasives	416-50288	28 in / 1 in Pad

SANDERS

Sand floors to professional results with highly productive, easy-to-use sanders.

Features include:

- Dust collector system
- Easy sandpaper changing system

7⁷/₈-18 IN
WORKING WIDTHS



MAKE	MODEL	TYPE	WORKING WIDTH	PAD SPEED	POWER	WEIGHT	CAT CLASS
American Sander	OBS-18DC	Random orbital sander	18 in	3,600 vpm	120V 1PH 10A	125 lb	100-5300
American Sander	EZ-8	Drum sander	8 in	1,800 rpm	120V 1PH 12A	105 lb	100-5310
American Sander	Super 7R	Edge sander	7 7/8 in	2,800 rpm	120V 1PH 12A	35 lb	100-5320

WE OFFER A WIDE VARIETY OF SAND PAPER TYPES AND GRITS TO MEET YOUR WOOD FLOOR FINISHING NEEDS

FLOOR SWEEPERS

Battery-powered walk-behinds and propane industrial rider sweepers will help keep your facility free of debris and dust.

Features and applications include:

- Easy to clean and operate
- Collects debris in an easy-to-dump hopper
- Excellent for warehouses, walkways, malls, airports, and schools

UP TO 134K SQ FT
PRODUCTION RATE PER HOUR
25-62 IN
CLEANING WIDTH



MAKE	MODEL	TYPE	CLEANING WIDTH	HOPPER CAPACITY	POWER	PRODUCTION RATE	TRAVEL SPEED	WEIGHT	CAT CLASS
Tennant	S6	Push walk-behind	25 in	1,25 cu ft	Rechargeable battery	Up to 18,750 sq ft hr	1.7 mph	115 lb	105-3580
Tennant	S7	Self-propelled walk-behind	28 in	1.6 cu ft	Rechargeable battery	Up to 28,000 sq ft hr	2.27 mph	267 lb	105-3585
Tennant	S10	Self-propelled walk-behind	34 in	2.8 cu ft	Rechargeable battery	Up to 34,100 sq ft hr	2.9 mph	599 lb	105-3590
Karcher	KM 85/50 R BP	Ride-on	41.3 in	1.8 cu ft	Rechargeable battery	Up to 54,900 sq ft hr	3.7 mph	555 lb	105-3598
Tennant	S16 Low dump	Ride-on	60 in	5.3 cu ft	Rechargeable battery	Up to 145,200 sq ft hr	5.5 mph	1,940 lb	105-3605
Tennant	S16 High dump	Ride-on	60 in	5.3 cu ft	Rechargeable battery	Up to 145,200 sq ft hr	5.5 mph	2,150 lb	105-3606
Tennant	S20	Ride-on	50 in	11 cu ft	Propane 24.8HP	Up to 103,840 sq ft hr	6 mph	2,450 lb	105-3600
Tennant	S30	Ride-on	62.5 in	14 cu ft	Propane 50HP	Up to 133,760 sq ft hr	8 mph	3,570 lb	105-3610

FLOOR SCRUBBERS AND SWEEPER-SCRUBBERS

Scrubbers are efficient, thorough, and hygienic, triple your scrub time while also reducing the risk of slip-and-fall accidents and chemical usage. Use sweeper-scrubbers to tackle your primary cleaning challenges.

Features include:

- Ergonomically-designed
- Durable and easy to use
- Over three hours of continuous run time
- Floors clean, safe and dry in seconds

UP TO 102K SQ FT
PRODUCTION RATE PER HOUR
14-48 IN
CLEANING WIDTH



MAKE	MODEL	TYPE	CLEANING WIDTH	SOLUTION TANK	RECOVERY TANK	TRAVEL SPEED	PRODUCTION RATE	WEIGHT	POWER	CAT CLASS
Karcher	BR 35/12 C BP	Walk-behind scrubber	14 in	3.2 gal	3.2 gal	N/A	Up to 15,069 sq ft hr	93 lb	Battery	105-3702
Tennant	T1B	Walk-behind scrubber	15 in	2.5 gal	3.4 gal	N/A	Up to 7,750 sq ft hr	110 lb	Battery	105-3702
Tennant	i-mop XL Plus	Walk-behind scrubber	18 in	1 gal	1.5 gal	N/A	Up to 19,375 sq ft hr	59 lb	Battery	105-3705
Tennant	T300	Walk-behind scrubber	20 in	11 gal	14 gal	2.3 mph	Up to 18,906 sq ft hr	400 lb	Battery	105-3710
Tennant	T350	Stand-on scrubber	24 in	14.1 gal	18.4 gal	3.6 mph	Up to 38,016 sq ft hr	730 lb	Battery	105-3717
Tennant	T600E	Walk-behind scrubber	32 in	32 gal	37 gal	3.3 mph	Up to 34,964 sq ft hr	1,036 lb	Battery	105-3715
Tennant	T7	Ride-on scrubber	32 in	29 gal	29 gal	4 mph	Up to 56,320 sq ft hr	850 lb	Battery	105-3719
Tennant	T16	Ride-on scrubber	36 in	50 gal	60 gal	5.6 mph	Up to 55,440 sq ft hr	2,800 lb	Battery	105-3720
Tennant	T20	Ride-on scrubber	40 in	80 gal	95 gal	8 mph	Up to 88,000 sq ft hr	4,900 lb	Propane 55HP	105-3740
Tennant	M20	Ride-on sweeper-scrubber	40 in	56 gal	73 gal	8 mph	Up to 88,000 sq ft hr	3,300 lb	Propane 42.4HP	105-3760
Tennant	M30	Ride-on sweeper-scrubber	48 in	75 gal	95 gal	8 mph	Up to 102,080 sq ft hr	4,000 lb	Propane 42.4HP	105-3765

TENNANT SCRUBBER DETERGENTS AND CLEANING SOLUTIONS

CLEAR NEUTRAL

Light duty cleaning formula that is great for general cleaning use.



PART NUMBER	DESCRIPTION
9006758	Daily cleaner, 2.5 gallon

RED HIGH ALKALINE DEGREASER

Heavy duty cleaning formula that is great for removing petroleum and grease.



PART NUMBER	DESCRIPTION
9006776	Heavy-duty cleaner, 2.5 gallon

YELLOW NEUTRAL PH SOLVENT DEGREASER

Aggressive cleaning formula, great for removing heavy traffic scuffing and marking.



PART NUMBER	DESCRIPTION
9006770	Aggressive cleaner, 2.5 gallon

120/240V SINGLE PHASE SPIDER BOXES

Distributes power safely and efficiently from shore power or generators.

Features and applications include:

- Meets UL, NEC and OSHA requirements
- Meets OSHA regulation for open-neutral GFCI Protection
- Thermal magnetic circuit breakers with overcurrent protection
- Stackable and rated for indoor and outdoor use

50 A
MAX AMPERAGE



MAKE	MODEL	INPUT	OUTPUT	FEED THRU	WEIGHT	CAT-CLASS
Lex	T2-A2-6AIE	CS63 240V 50A 1PH	(6) NEMA 5-20 (120V 20A), (1) NEMA L6-30 (240V 30A)	CS63 240V 50A 1PH	29 lb	940-2520
Southwire	992PIXX-1	6 ft 6/4 125/250V 1PH 50A Whip with CS6365H Plug	(1) NEMA 5-20 (120V 20A), (1) NEMA L5-20 (120V 20A), (1) NEMA L6-30 (240V 30A), (1) NEMA L14-30 (240V 30A)	N/A	33 lb	940-2540

EXTENSION CORDS AND CABLES

L	LOCKING	CS	CALIFORNIA STYLE	P	PLUG	R	RECEPTICAL
---	---------	----	------------------	---	------	---	------------

MAKE	Southwire	
MODEL	1788SW0002	
CABLE TYPE	Extension cord	
LENGTH	50 ft	
GAUGE/WIRE QTY.	10/3	
POWER TYPE	120V 1PH 15A	
PLUG NEMA RATING	5-15R / 5-15P	
CAT-CLASS	940-2724	

MAKE	Grainger	
MODEL	4FZZ7	
CABLE TYPE	Extension cord	
LENGTH	50 ft	
GAUGE/WIRE QTY.	10/3	
POWER TYPE	120V 1PH 20A	
PLUG NEMA RATING	5-20R / 5-20P	
CAT-CLASS	940-2725	

MAKE	Southwire	
MODEL	19180008	
CABLE TYPE	Spider box cable	
LENGTH	50 ft	
GAUGE/WIRE QTY.	6/3 - 8/1	
POWER TYPE	240V 1PH 50A	
PLUG NEMA RATING	CS6364R/CS6365P	
CAT-CLASS	940-2508	

MAKE	Lex	
MODEL	PF050A-EOFC-NG-NG-N	
CABLE TYPE	Extension cord	
LENGTH	50 ft	
GAUGE/WIRE QTY.	10/3	
POWER TYPE	240V 1PH 30A	
PLUG NEMA RATING	L6-30 R / L6-30P	
CAT-CLASS	940-0115	

MAKE	Lex	
MODEL	PE6/4-50-CS81	
CABLE TYPE	Extension cord	
LENGTH	50 ft	
GAUGE/WIRE QTY.	6/4	
POWER TYPE	480V 3PH 50A	
PLUG NEMA RATING	CS8164R/CS8165P	
CAT-CLASS	925-3080	

MAKE	Lex	
MODEL	TL6/4-10-CS81	
CABLE TYPE	Female pigtail	
LENGTH	10 ft	
GAUGE/WIRE QTY.	6/4	
POWER TYPE	480V 3PH 50A	
PLUG NEMA RATING	CS8164R / bare 4 wire	
CAT-CLASS	940-0900	



MAKE	Southwire	
MODEL	LIV18240008	
CABLE TYPE	Spider box dryer whip	
LENGTH	10 ft	
GAUGE/WIRE QTY.	6/4	
POWER TYPE	240V 1PH 50A	
PLUG NEMA RATING	CS6364R / 14-30P	
CAT-CLASS	940-2511	

The logo for Herc Rentals features a yellow swoosh above the word "Herc" in a bold, sans-serif font, followed by "Rentals" in a white, italicized serif font. A registered trademark symbol (®) is located at the top right of the word "Rentals".

Herc*Rentals*[®]

HercRentals.com